



Short form catalogue

release 8.8





Camozzi spa
Società Unipersonale

Via Eritrea, 20/I
25126 Brescia - Italy
Tel. +39 030 37921
Fax +39 030 2400430
info@camozzi.com
www.camozzi.com

Technical assistance

Products inquiries and
requests for support:
Tel. +39 030 3792790
service@camozzi.com

Special products inquiries:
Tel. +39 030 3792390
service@camozzi.com



Welcome to the world of Camozzi

This new short form catalogue features
Camozi's complete range of products.

Further detailed information
is available in our full catalogue.

We suggest you also to take a look
at our website, where you can discover
more about the world of Camozzi.




1 > Movement

Includes News



2 > Control

Includes News



3 > Treatment

Includes News



4 > Connection

Includes News



5 > Vacuum



1 > Movement



Cylinders according standards

		Page
Series 16, 24, 25	Minicylinders CETOP RP52-P / DIN/ISO 6432 Single-acting and double-acting Series 16: ø 8, 10, 12 mm Series 24: ø 16, 20, 25 mm - magnetic Series 25: ø 16, 20, 25 mm - magnetic cushioned	3
Series 40	Cylinders ISO 15552 DIN/ISO 6431 / VDMA 24562 Double-acting, cushioned, magnetic ø 160, 200, 250, 320 mm	4
Series 41	Cylinders - Aluminium profile DIN/ISO 6431 / VDMA 24562 Double-acting cushioned, magnetic ø 160, 200 mm	5
Series 60	Cylinders ISO 15552 DIN/ISO 6431 / VDMA 24562 Single and double-acting, magnetic, cushioned Standard, low friction, low temperatures and tandem versions ø 32, 40, 50, 63, 80, 100, 125 mm	6
Series 61	Cylinders - Aluminium profile ISO 15552 DIN/ISO 6431 / VDMA 24562 Single and double-acting, magnetic, cushioned Standard, low friction, low temperatures and tandem versions ø 32, 40, 50, 63, 80, 100, 125 mm	7
Series 62	Cylinders - Aluminium profile ISO 15552 DIN/ISO 6431 / VDMA 24562 Double-acting, magnetic, cushioned ø 32, 40, 50, 63, 80, 100 mm	8
Series 6PF	Positioning Feedback cylinders ISO 15552 DIN/ISO 6431 / VDMA 24562 Double-acting low friction, magnetic ø 50, 63, 80, 100, 125 mm	9
Series 63	Cylinders - Aluminium tube and profile ISO 15552 DIN/ISO 6431 / VDMA 24562 Single and double-acting, magnetic, cushioned Versions: standard, low friction, high and low temperatures ø 32, 40, 50, 63, 80, 100, 125 mm	10
Series 32	Compact cylinders ISO 21287 Single and double-acting, non-rotating, magnetic ø 20, 25, 32, 40, 50, 63, 80, 100 mm	12
Series 32	Compact cylinders, tandem and multi-position versions ISO 21287 Double-acting, magnetic, ø 25, 40, 63, 100 mm	13
Series 45	Anti-rotation guides For cylinders DIN/ISO 6432 ø 12, 16, 20, 25 mm For cylinders DIN/ISO 6431 ø 32, 40, 50, 63, 80, 100 mm	14

Compact cylinders

		Page
Series QN	Short-stroke cylinders Single-acting, non magnetic ø 8, 12, 20, 32, 50, 63 mm	15
Series QP, QPR	Short-stroke cylinders Series QP: single and double-acting, magnetic Series QPR: double-acting magnetic, non-rotating ø 12, 16, 20, 25, 32, 40, 50, 63, 80, 100 mm	16
Series 31	Compact cylinders Series 31M-31F: single-acting and double-acting, magnetic Series 31R: double-acting, non-rotating, magnetic ø 12, 16, 20, 25 mm ø 32, 40, 50, 63, 80, 100 mm UNITOP	17
Series 31	Compact cylinders, tandem and multi-position versions Double-acting, magnetic ø 12, 16, 20, 25, 32, 40, 50, 63, 80, 100 mm	18

Stainless steel cylinders

		Page
Series 90	Stainless steel cylinders ISO 15552 DIN/ISO 6431 / VDMA 24562 Single and double-acting, cushioned, magnetic ø 32, 40, 50, 63, 80, 100 and 125 mm	19
Series 94, 95	Stainless steel minicylinders CETOP RP52-P / DIN/ISO 6432 Single and double-acting, magnetic Series 94: ø 16, 20, 25 mm Series 95: ø 25 mm, cushioned	20
Series 97	Stainless steel cylinders Single and double-acting, cushioned, magnetic ø 32, 40, 50, 63 mm	21




Guided cylinders

		Page
Series QCT, QCB	Cylinders with integrated guide Double-acting, magnetic piston, guided ø 20, 25, 32, 40, 50, 63 mm	22
Series QCTF, QCBF	Cylinders with integrated guide Double-acting, magnetic, with double bearings and flanges ø 20, 25, 32, 40 mm	23
Series QX	Twin cylinders Double-acting, magnetic, guided ø 10x2, 16x2, 20x2, 25x2, 32x2 mm	24










Cylinders not according standards

		Page
Series 14	Compact minicylinders Single-acting Bores ø 6, 10, 16 mm and strokes 5, 10, 15 mm With super-rapid fitting ø 4 and M5 port	25
Series 27	Cylinders Double-acting, magnetic ø 20, 25, 32, 40, 50, 63 mm	26
Series 42	Cylinders Single and double-acting, magnetic, cushioned ø 32, 40, 50, 63 mm	27



Rotary cylinders

		Page
Series 69	Rotary cylinders	28
	Magnetic, cushioned ø 32, 40, 50, 63, 80, 100, 125 Rotational angles: 90°, 180°, 270° and 360°	
Series 30	Rotary cylinders	28
	Non magnetic, cushioned and not cushioned ø 50, 63, 80, 100 mm Rotational angles: 90° and 180°	
Series ARP	Rotary actuators	29
	Model: "Rack & Pinion" Sizes: 1, 3, 5, 10, 12, 20, 35, 55, 70, 100, 150, 250, 400 Rotational angles: 90°	



Grippers

		Page
Series CGA	Angular grippers	30
	Magnetic Sizes: ø 10, 16, 20, 25, 32 mm	
Series CGSN	180° angular grippers	30
	Magnetic Sizes: ø 16, 20, 25, 32 mm	
Series CGP	Parallel grippers	30
	Magnetic Sizes: ø 10, 16, 20, 25, 32 mm	
Series CGPT	Self-centering parallel grippers	31
	Single and double acting, magnetic, self-centering Bores: ø 16, 20, 25, 32, 40 mm	
Series CGPS	Self-centering parallel grippers with double ball bearing guide	31
	Single and double acting, magnetic, self-centering Bores: ø 10, 16, 20, 25, 32 mm	
Series CGLN	Wide opening parallel grippers	32
	Sizes: ø 10, 16, 20, 25, 32 mm	
Series CGC	3-Finger centric grippers	32
	Magnetic Sizes: 50, 64, 80, 100, 125	
Series RPGA	Sprue grippers - Size 20 mm	33
	Angular, not self-centering, single-acting, Normally Open (NO) Models: Flat Finger, Curved Finger, Short Finger, Flat Finger with sensor slot, Curved Finger with sensor slot	
Series RPGB	Sprue grippers - Size 8, 12 mm	33
	Angular, not self-centering, single-acting, Normally Open (NO) Models: Flat Finger, Short Finger, Flat Finger with sensor	




Rodless cylinders

		Page
Series 50	Rodless cylinders	34
	Double-acting, magnetic, cushioned ø 16, 25, 32, 40, 50, 63, 80 mm	
Series 52	Rodless cylinders	35
	Double-acting, magnetic, cushioned ø 25, 32, 40, 50, 63 mm	









Proximity switches

		Page
Series CSH, CST, CSV, CSB, CSC, CSD	Magnetic proximity switches	36
	Reed - Magneto-resistive - Hall effect	
Series CSN	Proximity switches	37
	Reed switches	
	Table showing the use of Camozzi magnetic proximity switches	39

Clamping elements and shock absorbers

		Page
Series 43	Hydrochecks	41
	Bore ø 40mm Regulated thrust or return stroke Skip-Stop function	
Series RL	Rod lock ISO 6431/VDMA and ISO 6432	42
	For cylinders ø 20, 25, 32, 40, 50, 63, 80, 100, 125 mm	
Series SA	Shock absorbers	43
	7 different sizes Threads: M8x1 - M10x1 - M12x1 M14x1,5 - M20x1,5 - M25x1,5 - M27x1,5	

Electrical actuation

		Page
Series 6E	Electromechanical cylinders ISO 15552	44
	Sizes 32, 40, 50 and 63	
Series 5E	Electromechanical axis	45
	Sizes 50, 65, 80	
Series DRWB	Drivers for the control of electric actuation	46
	Driver for Brushless motors, sizes in power classes 100, 400 and 750 W	
Series DRWS	Drivers for the control of electric actuation	46
	Driver for Stepper motors, one size/version	
Series MTB	Motors for electric actuation	47
	Brushless motors in power classes 100, 400 and 750 W	
Series MTS	Motors for electric actuation	47
	Stepper motors with Nema 23 or 24 fixing flange	
Series GB	Planetary gearboxes	48
	Available sizes: 40, 60 and 80	
Series CO	Motion transmission devices	48
	Mod. COE: elastomer coupling with clamps Mod. COS: elastomer coupling with expansion shaft Mod. COT: self-centering locking-set	

Series 16, 24 and 25 minicylinders

Single-acting and double-acting CETOP RP52-P DIN/ISO 6432

Series 16: ø 8, 10, 12 mm. Series 24: ø 16, 20, 25 mm - magnetic

Series 25: 16, 20, 25 mm - magnetic, cushioned



Mod. I



Mod. GKF



Mod. GK



Mod. G



Mod. GA



Mod. E



Mod. B



Mod. V



Mod. U



Mod. GY

CODING EXAMPLE

24	N	2	A	16	A	100
24	SERIES: 16 = non magnetic 24 = magnetic 25 = magnetic, adjustable cushioning					
N	VERSION: N = standard					
2	OPERATION: 1 = single-acting, front spring, no cushion 2 = double-acting 3 = double-acting, through-rod 7 = single-acting, through-rod				PNEUMATIC SYMBOLS * CS02 (s. 16) - CS06 (s. 24) CD01 (s. 16) - CD07 (s. 24) - CD09 (s. 25) CD05 (s. 16) - CD12 (s. 24) - CD13 (s. 25) CS04 (s. 16) - CS10 (s. 24)	
A	MATERIALS: A = rolled stainless steel AISI 303 rod, stainless steel AISI 304 tube, anodized AL end-blocks					
16	BORE: 08 = 8 mm - 10 = 10 mm - 12 = 12 mm - 16 = 16 mm - 20 = 20 mm - 25 = 25 mm					
A	CONSTRUCTION: A = Nose nut Mod. V + Piston rod lock nut Mod. U RL = cylinder with rod lock ø 20 - ø 25					
100	STROKE: Series 16 ø 8 ÷ ø 10: 10 - 250 mm; ø 12: 10 - 300 mm / Series 24 and 25 ø 16: 10 - 600 mm; ø 20 - ø 25: 10 - 1000 mm					
= standard V = rod seal in FKM W = all seals in FKM, +130°C (for series 25 only)						
* = The complete list of cylinders pneumatic symbols is available at the end of this chapter						

STANDARD STROKES

- = Double-acting
 ✕ = Single-acting

Series	Ø	10	25	40	50	80	100	125	160	200	250	300	320	400	500
16	8	✕	✕	✕	✕	■	■	■	■	■					
16	10	✕	✕	✕	✕	■	■	■	■	■					
16	12	✕	✕	✕	✕	■	■	■	■	■	■	■			
24	16	✕	✕	✕	✕	■	■	■	■	■	■	■	■	■	■
24	20	✕	✕	✕	✕	■	■	■	■	■	■	■	■	■	■
24	25	✕	✕	✕	✕	■	■	■	■	■	■	■	■	■	■
25	16	■	■	■	■	■	■	■	■	■	■	■	■	■	■
25	20	■	■	■	■	■	■	■	■	■	■	■	■	■	■
25	25	■	■	■	■	■	■	■	■	■	■	■	■	■	■

Series 40 cylinders

Double-acting, cushioned, magnetic
ISO 15552 - DIN/ISO 6431 / VDMA 24562
ø 160, 200, 250, 320 mm



1

MOVEMENT



Mod. S



Mod. ZS



Mod. BF



Mod. G



Mod. D-E



Mod. F



Mod. B



Mod. GA



Mod. C-H



Mod. U



Mod. L



Mod. C+L+S



Mod. GK

CODING EXAMPLE

40	M	2	L	160	A	0200	
----	---	---	---	-----	---	------	--

40

SERIES

M

VERSION:
M = standard, magnetic

2

OPERATION:
2 = double-acting, front and rear cushions
3 = double-acting, no cushion
4 = double-acting, rear cushions
5 = double-acting, front cushion
6 = double-acting, through-rod, front and rear cushionsPNEUMATIC SYMBOLS *
CD09
CD07
CD10
CD11
CD13

L

MATERIALS:
L = AL end blocks and piston, rolled stainless steel AISI 420B (ø 160-200 mm) or chrome plated steel (ø 250-320 mm) piston rod, zinc-plated steel piston rod nut, anodized AL tube, zinc-plated steel tie-rods and tie-rod nuts, NBR-PU rod - piston - cushion seals brass rod scraper
T = stainless steel AISI 420B tie-rods - stainless steel AISI 303 tie-rod nuts
C = rolled stainless steel AISI 303 piston rod, stainless steel AISI 304 piston rod nut
U = rolled stainless steel AISI 303 piston rod, stainless steel AISI 304 piston-rod nut, stainless steel AISI 420B tie-rods, stainless steel AISI 303 tie-rod nuts
W = rolled stainless steel AISI 304 piston rod, stainless steel AISI 304 piston-rod nut, stainless steel AISI 420B tie-rods, stainless steel AISI 303 tie-rod nuts
Note: The rod of cylinders with bore of 250 and 320 mm is in C40 chrome plated steel

160

BORE:
160 = 160 mm - 200 = 200 mm - 250 = 250 mm - 320 = 320 mm

A

TYPE OF BRACKET:
A = standard
F = cylinder with centre trunnion

0200

STROKE:
10 ÷ 2500 mm= standard
V = FKM rod seals - W = all FKM seals +130°C - C = PU coated cylinder. Colour: Grey
G = with brass rod scraper (chrome plated stainless steel AISI 420B rod, NBR rod seal) [ø 250 and 320 excluded]
(_ _ _) = extended piston rod _ _ _ mmNotes: The C version is available on request. For further details, contact our technical dept
The W and C versions are available for diameters 160 and 200 only

* = The complete list of cylinders pneumatic symbols is available at the end of this chapter

STANDARD STROKES

■ = Double-acting

Ø	25	50	75	80	100	125	150	160	200	250	300	320	400	500
160		■		■	■		■		■		■		■	■
200		■			■				■		■			
250		■			■				■		■			
320		■			■				■		■			

Series 41 cylinders - Aluminium profile

Double-acting, cushioned, magnetic
DIN/ISO 6431 / VDMA 24562
ø 160, 200 mm



Mod. S



Mod. ZS



Mod. BF



Mod. G



Mod. D-E



Mod. F



Mod. B



Mod. GA



Mod. C-H



Mod. U



Mod. L



Mod. C+L+S



Mod. GK

CODING EXAMPLE

41	M	2	P	160	A	0200
41	SERIES					
M	VERSION: M = standard magnetic					
2	OPERATION: 2 = double-acting, front and rear cushions 3 = double-acting, no cushion 4 = double-acting, rear cushions 5 = double-acting, front cushion 6 = double-acting, through-rod, front and rear cushions				PNEUMATIC SYMBOLS * CD09 CD07 CD10 CD11 CD13	
P	MATERIALS: P = AL end blocks and piston, rolled stainless steel AISI 420B piston rod, zinc-plated steel piston rod nut, anodized AL-profile tube, zinc-plated steel tie-rods and tie-rod nuts, NBR rod - piston - cushion seals R = stainless steel AISI 420B tie-rods, stainless steel AISI 303 tie-rod nuts C = rolled stainless steel AISI 303 piston rod, stainless steel AISI 304 piston rod nut U = rolled stainless steel AISI 303 piston rod, stainless steel AISI 304 piston rod nut, stainless steel AISI 420B tie-rods, stainless steel AISI 303 tie-rod nuts W = rolled stainless steel AISI 304 piston rod, stainless steel AISI 304 piston rod nut, stainless steel AISI 420B tie-rods, stainless steel AISI 303 tie-rod nuts					
160	BORE: 160 = 160 mm - 200 = 200 mm					
A	TYPE OF DESIGN: A = tie-rods F = cylinder with centre trunnion					
0200	STROKE 10 ÷ 2500 mm					
<div>= standard V = FKM rod seals W = all FKM seals +130°C C = PU coated cylinder. Color: Grey G = with brass rod scraper (chrome plated stainless steel AISI 420B rod, NBR rod seal) (_ _ _) = extended piston rod _ _ _ mm</div> <div>Notes: The C version is available on request. For further details, contact our technical dept</div>						
* = The complete list of cylinders pneumatic symbols is available at the end of this chapter						

STANDARD STROKES

× = Double-acting

Ø	25	50	75	80	100	125	150	160	200	250	300	320	400	500
160		×			×		×		×				×	×
200		×			×				×					


Series 60 cylinders

Single and double-acting, magnetic, cushioned. ISO 15552 - DIN/ISO 6431 / VDMA 24562
Standard, low friction, low temperatures and tandem versions - \varnothing 32, 40, 50, 63, 80, 100, 125 mm
Example of assembly with a valve on page 11



1

MOVEMENT

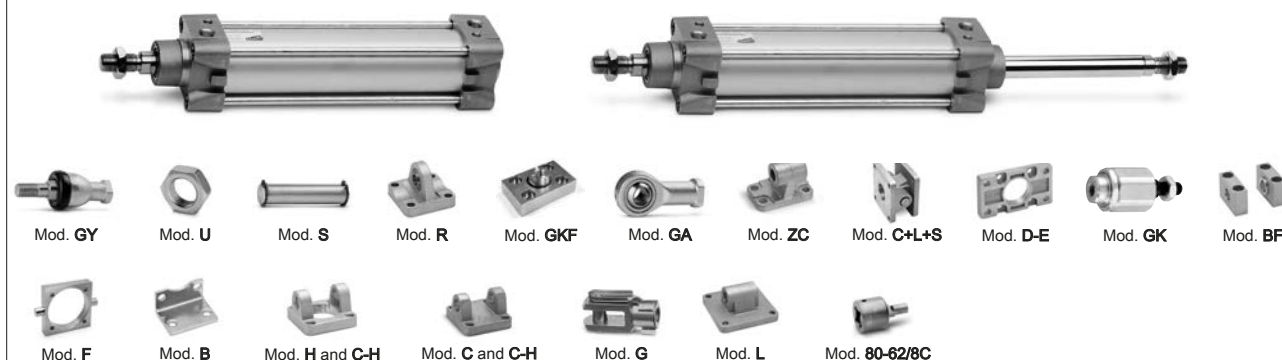

CODING EXAMPLE

60	M	2	L	050	A	0200	
60	SERIES						
M	VERSIONS: M = magnetic - N = non magnetic - L = low friction, magnetic						
2	OPERATION: 1 = single-acting, front spring 2 = double-acting, front and rear cushioned 3 = double-acting, no cushion 4 = double-acting, rear cushioned 5 = double-acting, front cushioned 6 = double-acting, through-rod, front and rear cushioned 7 = single-acting, through-rod					PNEUMATIC SYMBOLS * CS03 (N) - CS07 (M) CD02 (N) - CD09 (M) CD01 (N) - CD08 (M) CD03 (N) - CD10 (M) CD04 (N) - CD11 (M) CD06 (N) - CD13 (M) CS05 (N) - CS11 (M)	
L	MATERIALS: L = standard: AL end-blocks and piston, rolled stainless steel AISI 420B rod, anodized AL tube, zinc-plated steel tie-rods and tie-rod nuts, PU seals; low friction: standard materials with NBR piston seals and NBR rod seal (FKM rod seal on request) low temperature: standard materials with chrome plated stainless steel AISI 420B rod, brass rod scraper ring, stainless steel AISI 303 nuts, stainless steel AISI 420B tie-rods, PU piston seals and NBR rod seal T = stainless steel AISI 420B tie-rods, stainless steel AISI 303 tie-rod nuts, others C = rolled stainless steel AISI 303 piston rod, stainless steel AISI 304 piston rod nut U = rolled stainless steel AISI 303 piston rod, AISI 304 piston-rod nut, AISI 420B tie-rods, AISI 303 tie-rod nuts W = rolled stainless steel AISI 304 piston rod, AISI304 piston-rod nut, AISI 420B tie-rods, AISI 303 tie-rod nuts Z = chrome plated stainless steel AISI 420B rod, stainless steel AISI 304 rod nut, stainless steel AISI 420B tie-rods, stainless steel AISI 303 tie-rods nuts, seals for low temperature (-40°C), brass rod scraper [ø 125 excepted] Y = chrome plated stainless steel AISI 420B rod, stainless steel AISI 304 rod nut, stainless steel AISI 420B tie-rods, stainless steel AISI 303 tie-rods nuts, seals for low temperature (-50°C), brass rod scraper [ø 125 excepted]						
050	BORE: 032 = 32 mm - 040 = 40 mm - 050 = 50 mm - 063 = 63 mm - 080 = 80 mm - 100 = 100 mm - 125 = 125 mm						
A	CONSTRUCTION: A = standard with lock nut for rod - RL = cylinder with rod lock - F = cylinder with centre trunnion						
0200	STROKE: 10 ÷ 2500 mm = standard - V = FKM rod seal - N = tandem [pneumatic symbols CD8T (M) - CD9T (N)] - R = NBR rod seal W = all FKM seals +130C° - C = PU coated cylinder. Colour: Grey - L = low friction version without rod seal (rear supply only) (_ _ _) = extended piston rod _ _ _ mm - G = with brass rod scraper (chrome plated stainless steel AISI 420B rod, NBR rod seal)						
Notes: Version C is available on request. For further information, please contact our technical department. With Version L the possibility to order the cylinder without piston rod seal further reduces the friction force.							
* = The complete list of cylinders pneumatic symbols is available at the end of this chapter Note: all double-acting cylinders are also available in the low friction version							

STANDARD STROKES

- = Single-acting (standard and low temperature)
 - ✱ = Double-acting (standard, low friction and low temperature)
- Other strokes up to 2500 mm are available on request


\varnothing	25	50	75	100	125	150	160	200	250	300	320	400	500
32	■ ✱	■ ✱	■ ✱	✱	✱	✱	✱	✱	✱	✱	✱	✱	✱
40	■ ✱	■ ✱	■ ✱	✱	✱	✱	✱	✱	✱	✱	✱	✱	✱
50	■ ✱	■ ✱	■ ✱	✱	✱	✱	✱	✱	✱	✱	✱	✱	✱
63	■ ✱	■ ✱	■ ✱	✱	✱	✱	✱	✱	✱	✱	✱	✱	✱
80	■ ✱	■ ✱	■ ✱	✱	✱	✱	✱	✱	✱	✱	✱	✱	✱
100		■ ✱	■ ✱	✱	✱	✱	✱	✱	✱	✱	✱	✱	✱
125		✱	✱	✱	✱	✱	✱	✱	✱	✱	✱	✱	✱

Series 61 cylinders - Aluminium profile

Single and double-acting, magnetic, cushioned. ISO 15552 - DIN/ISO 6431 / VDMA 24562

Standard, low friction, low temperatures and tandem versions - \varnothing 32, 40, 50, 63, 80, 100, 125 mm

Example of assembly with a valve on page 11

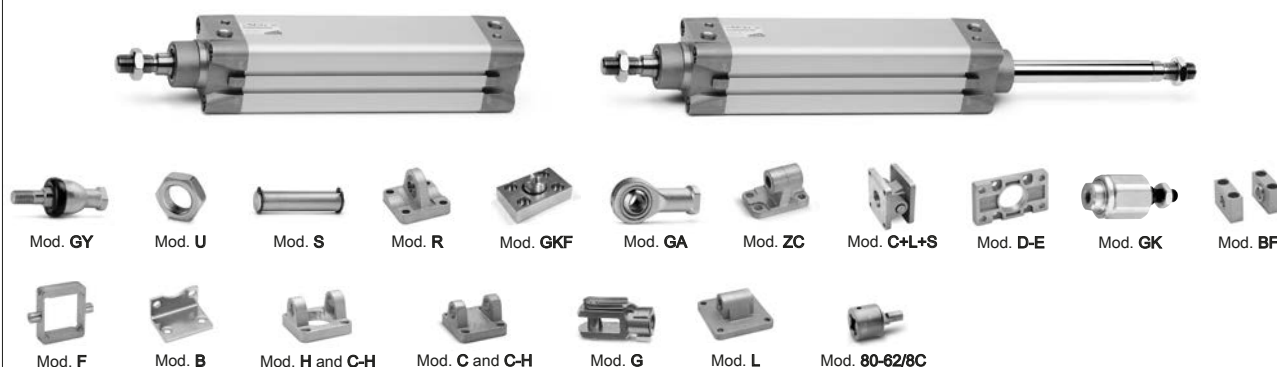

CODING EXAMPLE

61	M	2	P	050	A	0200	
61	SERIES						
M	VERSION: M = standard, magnetic - L = low friction, magnetic						
2	OPERATION: 1 = single-acting, front spring (ø 32 ± ø 100) 2 = double-acting, front and rear cushioned 3 = double-acting, no cushion 4 = double-acting, rear cushioned 5 = double-acting, front cushioned 6 = double-acting, through-rod, front and rear cushioned 7 = single-acting, through-rod					PNEUMATIC SYMBOLS * CS07 CD09 CD08 CD10 CD11 CD13 CS11	
P	MATERIALS: P = standard: AL end-blocks and piston, rolled stainless steel AISI 420B rod, anodized AL profile tube, zinc-plated steel tie-rods and tie-rod nuts, PU seals; low friction: standard materials with NBR piston seal and NBR rod seal (FKM rod seal on request) low temperature: standard materials with chrome plated stainless steel AISI 420B rod, brass rod scraper ring, stainless steel AISI 303 nuts, stainless steel AISI 420B tie-rods, PU piston seals and NBR rod seal R = stainless steel AISI 420B tie-rods, stainless steel AISI 303 tie-rod nuts, others C = rolled stainless steel AISI 303 piston rod, stainless steel AISI 304 piston rod nut U = rolled stainless steel AISI 303 piston rod, AISI 304 piston-rod nut, AISI 420B tie-rods, AISI 303 tie-rod nuts W = rolled stainless steel AISI 304 piston rod, AISI304 piston-rod nut, AISI 420B tie-rods, AISI 303 tie-rod nuts Z = chrome plated stainless steel AISI 420B rod, stainless steel AISI 304 rod nut, stainless steel AISI 420B tie-rods, stainless steel AISI 303 tie-rods nuts, seals for low temperature (-40°C), brass rod scraper [ø 125 excepted] Y = chrome plated stainless steel AISI 420B rod, stainless steel AISI 304 rod nut, stainless steel AISI 420B tie-rods, stainless steel AISI 303 tie-rods nuts, seals for low temperature (-50°C), brass rod scraper [ø 125 excepted]						
050	BORE: 032 = 32 mm - 040 = 40 mm - 050 = 50 mm - 063 = 63 mm - 080 = 80 mm - 100 = 100 mm - 125 = 125 mm						
A	CONSTRUCTION: A = standard with rod nut - RL = cylinder with rod lock						
0200	STROKE: 10 ÷ 2500 mm = standard - V = FKM rod seal - N = tandem [pneumatic symbols CD9T] - R = NBR rod seal W = all FKM seals +130C° - C = PU coated cylinder. Colour: Grey - L = low friction version without rod seal (rear supply only) (_ _ _) = extended piston rod _ _ _ mm - G = with brass rod scraper (chrome plated stainless steel AISI 420B rod, NBR rod seal)						
Notes: Version C is available on request. For further information, please contact our technical department. With Version L the possibility to order the cylinder without piston rod seal further reduces the friction force.							
* = The complete list of cylinders pneumatic symbols is available at the end of this chapter Note: all double-acting cylinders are also available in the low friction version							

STANDARD STROKES

- = Single-acting (standard and low temperature)
 - ✱ = Double-acting (standard, low friction and low temperature)
- Other strokes up to 2500 mm are available on request

\varnothing	25	50	75	80	100	125	150	160	200	250	300	320	400	500
32	■ ✱	■ ✱	■ ✱	✱	✱	✱	✱	✱	✱	✱	✱	✱	✱	✱
40	■ ✱	■ ✱	■ ✱	✱	✱	✱	✱	✱	✱	✱	✱	✱	✱	✱
50	■ ✱	■ ✱	■ ✱	✱	✱	✱	✱	✱	✱	✱	✱	✱	✱	✱
63	■ ✱	■ ✱	■ ✱	✱	✱	✱	✱	✱	✱	✱	✱	✱	✱	✱
80	■ ✱	■ ✱	■ ✱	✱	✱	✱	✱	✱	✱	✱	✱	✱	✱	✱
100		■ ✱	■ ✱	✱	✱	✱	✱	✱	✱	✱	✱	✱	✱	✱
125		✱	✱	✱	✱	✱	✱	✱	✱	✱	✱	✱	✱	✱

Series 62 cylinders - Aluminium profile

Double-acting, magnetic, cushioned. ISO 15552 - DIN/ISO 6431 / VDMA 24562

ø 32, 40, 50, 63, 80, 100 mm

Example of assembly with a valve on page 11



CODING EXAMPLE

62	M	2	P	050	A	0200	
62	SERIES						
M	VERSION: M = standard, magnetic						
2	OPERATION: 2 = double-acting, front + rear cushion 3 = double-acting, no cushion 4 = double-acting, rear cushion 5 = double-acting, front cushion 6 = double-acting, through-rod, front + rear cushion					PNEUMATIC SYMBOLS * CD09 CD08 CD10 CD11 CD13	
P	MATERIALS: P = AL end-blocks, technopolymer piston, rolled stainless steel AISI 420B piston rod, zinc-plated steel piston rod nut, anodized AL-profile tube, zinc-plated steel tie-rods and nuts, NBR piston rod and piston seals, PU cushion seals (ø 80-100: PU piston seal) R = stainless steel AISI 420B tie-rods, stainless steel AISI 303 tie-rod nuts C = rolled stainless steel AISI 303 piston rod , stainless steel AISI 304 piston rod nut U = rolled stainless steel AISI 303 piston rod, stainless steel AISI 304 piston rod nut, stainless steel AISI 420B tie-rod, stainless steel AISI 303 tie-rod nuts W = rolled stainless steel AISI 304 piston rod, stainless steel AISI304 piston rod nut, stainless steel AISI 420B tie-rods, stainless steel AISI 303 tie-rod nuts						
050	BORE: 032 = 32 mm - 040 = 40 mm - 050 = 50 mm - 063 = 63 mm - 080 = 80 mm - 100 = 100 mm						
A	CONSTRUCTION: A = standard lock nut for rod RL = cylinder with rod lock						
0200	STROKE: 10 ÷ 2500 mm = standard V = FKM piston rod seal P = PU piston rod seal (_ _ _) = extended piston rod _ _ _ mm						

* = The complete list of cylinders pneumatic symbols is available at the end of this chapter

STANDARD STROKES

✱ = Double-acting
Special strokes until 2500 mm available on request

ø	25	50	75	80	100	125	150	160	200	250	300	320	400	500
32	✱	✱	✱	✱	✱	✱	✱	✱	✱	✱	✱	✱	✱	✱
40	✱	✱	✱	✱	✱	✱	✱	✱	✱	✱	✱	✱	✱	✱
50	✱	✱	✱	✱	✱	✱	✱	✱	✱	✱	✱	✱	✱	✱
63	✱	✱	✱	✱	✱	✱	✱	✱	✱	✱	✱	✱	✱	✱
80	✱	✱	✱	✱	✱	✱	✱	✱	✱	✱	✱	✱	✱	✱
100		✱	✱	✱	✱	✱	✱	✱	✱	✱	✱	✱	✱	✱

Series 6PF Positioning Feedback cylinders

Double-acting low friction, magnetic. ISO 15552 - DIN/ISO 6431 / VDMA 24562

ø 50, 63, 80, 100, 125 mm

Example of assembly with a valve on page 11



Mod. GY



Mod. U



Mod. S



Mod. R



Mod. GKF



Mod. GA



Mod. ZC



Mod. C+L+S



Mod. D-E



Mod. GK



Mod. BF



Mod. F



Mod. B



Mod. H and C-H



Mod. C and C-H



Mod. G



Mod. L



Mod. 80-62/8C

CODING EXAMPLE

6PF	3	P	050	A	0200	
6PF SERIES						
3	OPERATION: 3 = double-acting low friction, no cushion					PNEUMATIC SYMBOL * CD08
P	MATERIALS: P = AL piston, rear endcap, steel nut and grain, anodized AL extrusion profile, sintered bronze rod guide bush, chrome plated steel rod, acetal resin piston guide element, nickel plated brass M12 connector, Neodymium magnetic actuator, NBR seals (rod, piston and OR)					
050	BORE: 050 = 50 mm 063 = 63 mm 080 = 80 mm 100 = 100 mm 125 = 125 mm					
A	CONSTRUCTION: A = standard with rod nut RL = cylinder with rod lock					
0200	STROKE: 50 ÷ 500 mm (step 50 mm)					
VERSIONS: = standard P = PU rod seal V = FKM rod seal L = without rod seal (rear supply only) G = with brass rod scraper (_ _ _) = extended piston rod _ _ _ mm						
Note: with Version L the possibility to order the cylinder without piston rod seal further reduces the friction force						
* = The complete list of cylinders pneumatic symbols is available at the end of this chapter						

STANDARD STROKES

* = Double-acting, low friction

Ø	50	100	150	200	250	300	350	400	450	500
50	*	*	*	*	*	*	*	*	*	*
63	*	*	*	*	*	*	*	*	*	*
80	*	*	*	*	*	*	*	*	*	*
100	*	*	*	*	*	*	*	*	*	*
125	*	*	*	*	*	*	*	*	*	*

Series 63 cylinders - Aluminium tube and profile

New

Single and double-acting, magnetic, cushioned.

Versions: standard, low friction, high and low temperatures. ø 32, 40, 50, 63, 80, 100, 125 mm

Example of assembly with a valve on page 11



CODING EXAMPLE

63	M	P	2	C	050	A	0200			
63	SERIES									
M	VERSION: M = standard, magnetic - L = low friction, magnetic									
P	CONSTRUCTION: T = round tube - P = profile									
2	OPERATION: 1 = single-acting, front spring 2 = double-acting 6 = double-acting, through-rod 7 = single-acting, through-rod 9 = single-acting, rear spring					PNEUMATIC SYMBOL * CS07 CD08 - CD09 - CD10 - CD11 CD13 CS11 CS14				
C	CUSHIONING: N = no cushioning C = cushioning on both sides F = front cushioning R = rear cushioning					CD08 CD09/CD13 CD11 CD10				
050	BORE: 032 = 32 mm - 040 = 40 mm - 050 = 50 mm - 063 = 63 mm - 080 = 80 mm - 100 = 100 mm - 125 = 125 mm									
A	CONSTRUCTIVE TYPE: A = standard with rod nut - RL = cylinder with rod lock - F = cylinder with centre trunnion									
0200	STROKES: 10 ÷ 2500 mm									
TEMPERATURE RANGE: = standard - W = high temperatures (150°C) - Z = low temperatures (-40°C) - Y = low temperatures (-50°C) - except ø 125										
RESISTANCE TO CORROSION: = standard (for further details see the Camozzi's catalogue) C1 = rod nut AISI 304 stainless steel, rod AISI 304 stainless steel (for further details see the Camozzi's catalogue)										
ROD VARIATIONS: = standard - (_ _ _) = rod longer than _ _ _ mm - L = without rod seal (rear supply only) * - R = NBR rod seal - V = FKM rod seal G = dry and dusty environments (with brass rod scraper and chrome-plated stainless steel AISI 420B rod)										
* The possibility to order the cylinder without piston rod seal, further reduces the friction force.										
Add EX to order the ATEX certified version.										
* = The complete list of cylinders pneumatic symbols is available at the end of this chapter										

STANDARD STROKES

- = Single-acting (standard, high and low temperatures). Other strokes up to 2500 mm are available on request.
 ✕ = Double-acting (standard, low friction, high and low temperatures)

Ø	25	50	75	80	100	125	150	160	200	250	300	320	400	500
32	■ ✕	■ ✕	■ ✕	✕	✕	✕	✕	✕	✕	✕	✕	✕	✕	✕
40	■ ✕	■ ✕	■ ✕	✕	✕	✕	✕	✕	✕	✕	✕	✕	✕	✕
50	■ ✕	■ ✕	■ ✕	✕	✕	✕	✕	✕	✕	✕	✕	✕	✕	✕
63	■ ✕	■ ✕	■ ✕	✕	✕	✕	✕	✕	✕	✕	✕	✕	✕	✕
80	■ ✕	■ ✕	■ ✕	✕	✕	✕	✕	✕	✕	✕	✕	✕	✕	✕
100		■ ✕	■ ✕	✕	✕	✕	✕	✕	✕	✕	✕	✕	✕	✕
125		■ ✕	■ ✕	✕	✕	✕	✕	✕	✕	✕	✕	✕	✕	✕

Examples of assembly Series 60, 61, 62, 6PF and 63

Example of assembly Series 60

Mod. **PCV-32**
PCV-40-50
PCV-63-80



Example of assembly Series 61 and 6PF

Mod. **PCV-61-K3** to connect Series 3 valves/solenoid valves, port G1/8
PCV-61-K4 to connect Series 4 valves/solenoid valves, port G1/4
PCV-61-K8 to connect Series 4 valves/solenoid valves, port G1/8 and Series 3 port G1/4
PCV-62-KEN to connect Series EN valves/solenoid valves



Example of assembly Series 62 and 63

Mod. **PCV-62-K3** to connect Series 3 valves/solenoid valves, port G1/8
PCV-62-K4 to connect Series 4 valves/solenoid valves, port G1/4
PCV-62-K8 to connect Series 4 valves/solenoid valves, port G1/8 and Series 3 port G1/4
PCV-62-KEN to connect Series EN valves/solenoid valves



Series 32 compact cylinders

Single and double-acting, non-rotating, magnetic
ISO 21287

ø 20, 25, 32, 40, 50, 63, 80, 100 mm



1

MOVEMENT



CODING EXAMPLE

32	M	2	A	032	A	050	
32	SERIES						
M	VERSION: M = male rod thread, mounted with rod nut Mod. U F = female rod thread R = antirotation with flange (not for single-acting version)						
2	OPERATION: 1 = single-acting, front spring 2 = double-acting 3 = double-acting, through-rod 4 = single-acting, rear spring					PNEUMATIC SYMBOLS * CS06 CD08 CD12 CS08	
A	MATERIALS: A = anodized aluminium body, end blocks and piston, PU seals (rod, end-blocks OR and piston)						
032	BORES: 020 = 20 mm - 025 = 25 mm - 032 = 32 mm - 040 = 40 mm 050 = 50 mm - 063 = 63 mm - 080 = 80 mm - 100 = 100 mm						
A	CONSTRUCTION: A = standard						
050	STROKE ø 20-25 = 5-300 mm / ø 32-40-50-63 = 5-400 mm / ø 80-100 = 5-500 mm = standard S = special V = FKM rod seal W = high temperatures (double-acting, non-magnetic with FKM seals for high temperatures up to 140°C)						
* = The complete list of cylinders pneumatic symbols is available at the end of this chapter							

STANDARD STROKES

- ✕ = Non-rotating
- = Double-acting, male/female rod thread
- = Single-acting, front/rear spring, male/female rod thread

ø	5	10	15	20	25	30	40	50	60	80
20	✕ • ■	✕ • ■	✕ • ■	✕ • ■	✕ • ■	✕ •	✕ •	✕ •		
25	✕ • ■	✕ • ■	✕ • ■	✕ • ■	✕ • ■	✕ •	✕ •	✕ •		
32	✕ • ■	✕ • ■	✕ • ■	✕ • ■	✕ • ■	✕ •	✕ •	✕ •	✕ •	✕ •
40	✕ • ■	✕ • ■	✕ • ■	✕ • ■	✕ • ■	✕ •	✕ •	✕ •	✕ •	✕ •
50		✕ • ■	✕ • ■	✕ • ■	✕ • ■	✕ •	✕ •	✕ •	✕ •	✕ •
63		✕ • ■	✕ • ■	✕ • ■	✕ • ■	✕ •	✕ •	✕ •	✕ •	✕ •
80		✕ • ■	✕ • ■	✕ • ■	✕ • ■	✕ •	✕ •	✕ •	✕ •	✕ •
100		✕ • ■	✕ • ■	✕ • ■	✕ • ■	✕ •	✕ •	✕ •	✕ •	✕ •

Series 32 compact cylinders tandem and multi-position versions

Double-acting, magnetic
ISO 21287
ø 25, 40, 63, 100 mm



Tandem version



Mod. 32F2A...XN2

Multi-position version



Mod. 32F2A...X1/X2N

CODING EXAMPLES

32	M	2	A	040	A	050	N	2
----	---	---	---	-----	---	-----	---	---

32

SERIES

M

VERSION:
M = male rod thread, mounted with rod nut Mod. U
F = female rod thread

2

OPERATION:
2 = double-acting
PNEUMATIC SYMBOLS *
CDPP

A

MATERIALS:
A = anodized aluminium body, end blocks and piston
PU seals (rod - OR end block and piston)

040

BORE:
025 = 25 mm
040 = 40 mm
063 = 63 mm
100 = 100 mm
PNEUMATIC SYMBOLS *
CD5T - CD6T - CD7T
CD2T - CD3T - CD4T
CD5T - CD6T - CD7T

A

CONSTRUCTION:
A = standard

050

STROKES (min and max):
ø 25 = 5+80 mm
ø 40-63-100 = 5+100 mm

N

TANDEM

2

STAGES:
2 = 2 stages

32	M	2	A	040	A	25/75	N
----	---	---	---	-----	---	-------	---

32

SERIES

M

VERSION:
M = male rod thread, mounted with rod nut Mod. U
F = female rod thread

2

OPERATION:
2 = double-acting
PNEUMATIC SYMBOLS *
CDPP

A

MATERIALS:
A = anodized aluminium body, end blocks and piston
PU seals (rod - OR end block and piston)

040

BORE:
025 = 25 mm
040 = 40 mm
063 = 63 mm
100 = 100 mm
PNEUMATIC SYMBOLS *
CD5T - CD6T - CD7T
CD5T - CD6T - CD7T
CD2T - CD3T - CD4T
CD5T - CD6T - CD7T

A

CONSTRUCTION:
A = standard

25/75

STROKES (min and max):
ø 25 = 5+300 (size for X2)
ø 40-63 = 5+400 (size for X2)
ø 100 = 5+500 (size for X2)


N

MULTI-POSITION


* = The complete list of cylinders pneumatic symbols is available at the end of this chapter

Operating schemes

Example for ordering:
Stroke 50 mm
Mod. 32M2A040A050N2



Example for ordering:
X1=25 mm and X2=75 mm
Mod. 32M2A040A25/75N

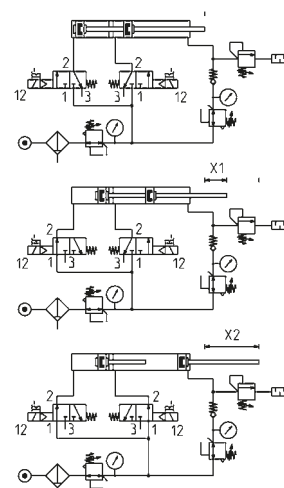

Series 45 anti-rotation guides

For cylinders DIN/ISO 6432 - \varnothing 12, 16, 20, 25 mm

For cylinders DIN/ISO 6431 - \varnothing 32, 40, 50, 63, 80, 100 mm



CODING EXAMPLE

45	N	UT	050	A	0100
45	SERIES				
N	VERSION: N = standard				
UT	OPERATION: UT = "U" self lubricating guide HT = "H" self lubricating guide HB = "H" ball guide				
050	BORE: 016 = \varnothing 12-16 mm (same guides for \varnothing 12) 020 = 20 mm 025 = 25 mm 032 = 32 mm 040 = 40 mm 050 = 50 mm 063 = 63 mm 080 = 80 mm 100 = 100 mm				
A	MATERIALS: A = anodized aluminium body - stainless steel AISI 420B columns for 45UT and 45HT - hardened steel C50 columns for 45HB				
0100	STROKE in mm				

Series QN short-stroke cylinders

Single-acting, non magnetic
 ø 8, 12, 20, 32, 50, 63 mm



CODING EXAMPLE

QN	1	A	50	A	25
QN	SERIES				
1	OPERATING: 1 = single-acting			PNEUMATIC SYMBOL* CS01	
A	MATERIALS: A = rolled stainless steel rod - aluminium body				
50	BORE: 08 = 8 mm 12 = 12 mm 20 = 20 mm 32 = 32 mm 50 = 50 mm 63 = 63 mm				
A	TYPE OF DESIGN: A = standard				
25	STROKE: (see the table)				

* = The complete list of cylinders pneumatic symbols is available at the end of this chapter

STANDARD STROKES

✕ = Single-acting

Ø	4	5	10	25
8	✕			
12	✕		✕	
20	✕		✕	
32		✕	✕	✕
50			✕	✕
63			✕	✕

Series QP and QPR short-stroke cylinders

Series QP: single and double-acting, magnetic

Series QPR: double-acting magnetic, non-rotating

ø 12, 16, 20, 25, 32, 40, 50, 63, 80, 100 mm



1

MOVEMENT

CODING EXAMPLE

QP	2	A	050	A	050	
QP	SERIES: QP = standard QPR = standard non-rotating					
2	OPERATION: 1 = single-acting, front spring (only QP) 2 = double-acting 3 = double-acting, through-rod			PNEUMATIC SYMBOLS * CS09 CD07 CD14		
A	MATERIALS: A = rolled stainless steel rod - AL tube profile					
050	BORE: 012 = 12 mm - 016 = 16 mm - 020 = 20 mm - 025 = 25 mm - 032 = 32 mm 040 = 40 mm - 050 = 50 mm - 063 = 63 mm - 080 = 80 mm - 100 = 100 mm					
A	TYPE OF MOUNTING: A = standard					
050	STROKE: Series QP: \varnothing 12+25 = 1+150 mm / \varnothing 32+100 = 1+200 mm Series QPR: \varnothing 12 = 1+50 mm / \varnothing 16 = 1+75 mm / \varnothing 20+100 = a 1+100 mm = standard V = FKM rod seal W = all FKM seals (\varnothing 12 excepted)					
* = The complete list of cylinders pneumatic symbols is available at the end of this chapter						

STANDARD STROKES

- = Double-acting
- ✕ = Single-acting
- = Non-rotating

ø	5	10	15	20	25	30	35	40	45	50	60	75	80	100
12	✕	✕	✕	✕	✕	✕	✕	✕	✕	✕	✕	✕	✕	✕
16	✕	✕	✕	✕	✕	✕	✕	✕	✕	✕	✕	✕	✕	✕
20	✕	✕	✕	✕	✕	✕	✕	✕	✕	✕	✕	✕	✕	✕
25	✕	✕	✕	✕	✕	✕	✕	✕	✕	✕	✕	✕	✕	✕
32	✕	✕	✕	✕	✕	✕	✕	✕	✕	✕	✕	✕	✕	✕
40	✕	✕	✕	✕	✕	✕	✕	✕	✕	✕	✕	✕	✕	✕
50	✕	✕	✕	✕	✕	✕	✕	✕	✕	✕	✕	✕	✕	✕
63	✕	✕	✕	✕	✕	✕	✕	✕	✕	✕	✕	✕	✕	✕
80	✕	✕	✕	✕	✕	✕	✕	✕	✕	✕	✕	✕	✕	✕
100	✕	✕	✕	✕	✕	✕	✕	✕	✕	✕	✕	✕	✕	✕


New version

Series 31 compact cylinders

Series 31M-31F: single-acting and double-acting, magnetic

Series 31R: double-acting, non-rotating, magnetic

ø 12, 16, 20, 25 mm. ø 32, 40, 50, 63, 80, 100 mm UNITOP

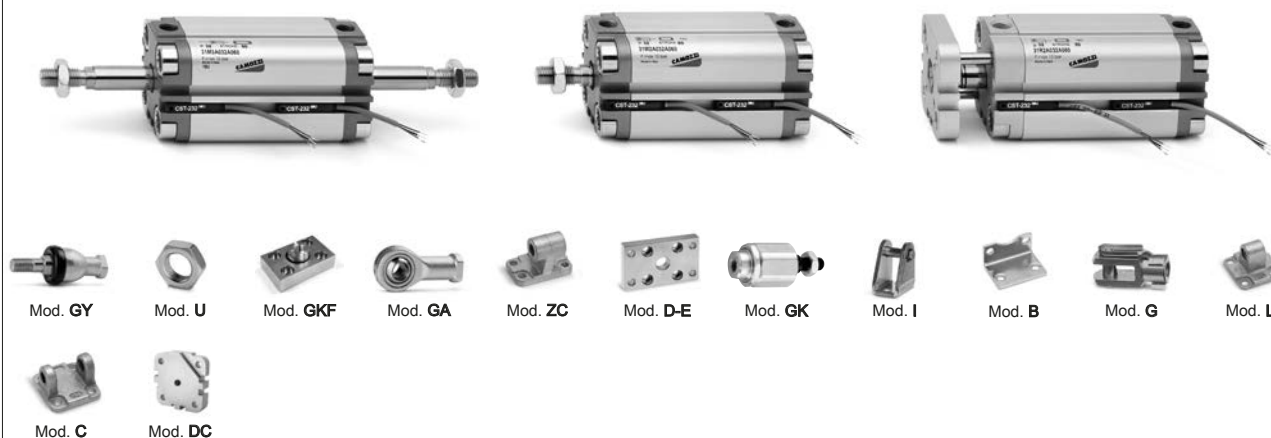

CODING EXAMPLE

31	M	2	A	032	A	050	
31	SERIES						
M	VERSION: M = male rod thread, mounted with rod nut Mod. U F = female rod thread R = non-rotating with flange only double-acting						
2	OPERATION: 1 = single-acting, front spring 2 = double-acting 3 = double-acting, through-rod 4 = single-acting, rear spring 7 = semplice effetto, stelo passante				PNEUMATIC SYMBOLS * CS06 CD08 CD12 CS08 CS10		
A	MATERIALS: A = rolled stainless steel AISI 303 rod - AL tube profile						
032	BORE: 012 = 12 mm - 016 = 16 mm - 020 = 20 mm - 025 = 25 mm - 032 = 32 mm 040 = 40 mm - 050 = 50 mm - 063 = 63 mm - 080 = 80 mm - 100 = 100 mm						
A	DESIGN TYPE: A = standard						
050	STROKE: Series 31R, 31M and 31F: $\varnothing 12 + 25 = 1 + 200 \text{ mm} / \varnothing 32 + 63 = 1 + 300 \text{ mm} / \varnothing 80 + 100 = 1 + 400 \text{ mm}$ The min. stroke for the use of sensors is 10 mm Single-acting = 5+25 mm (see the standard strokes table)						
	= standard S = special V = rod seal FKM W = seals in FKM for high temperatures (140°C), only available in the double-acting, non magnetic version						
* = The complete list of cylinders pneumatic symbols is available at the end of this chapter							

STANDARD STROKES

- = Double-acting female, male
- ✕ = Non-rotating
- = Single-acting female, male

Ø	5	10	15	20	25	30	40	50	60	80
12	■ ✕ ●	■ ✕ ●	■ ✕	■ ✕	■ ✕	■ ✕	■ ✕			
16	■ ✕ ●	■ ✕ ●	■ ✕ ●	■ ✕ ●	■ ✕ ●	■ ✕	■ ✕			
20	■ ✕ ●	■ ✕ ●	■ ✕ ●	■ ✕ ●	■ ✕ ●	■ ✕	■ ✕	■ ✕		
25	■ ✕ ●	■ ✕ ●	■ ✕ ●	■ ✕ ●	■ ✕ ●	■ ✕	■ ✕	■ ✕		
32	■ ✕ ●	■ ✕ ●	■ ✕ ●	■ ✕ ●	■ ✕ ●	■ ✕	■ ✕	■ ✕		
40	■ ✕ ●	■ ✕ ●	■ ✕ ●	■ ✕ ●	■ ✕ ●	■ ✕	■ ✕	■ ✕	■ ✕	■ ✕
50		■ ✕ ●	■ ✕ ●	■ ✕ ●	■ ✕ ●	■ ✕	■ ✕	■ ✕	■ ✕	■ ✕
63		■ ✕ ●	■ ✕ ●	■ ✕ ●	■ ✕ ●	■ ✕	■ ✕	■ ✕	■ ✕	■ ✕
80		■ ✕ ●	■ ✕ ●	■ ✕ ●	■ ✕ ●	■ ✕	■ ✕	■ ✕	■ ✕	■ ✕
100		■ ✕ ●	■ ✕ ●	■ ✕ ●	■ ✕ ●	■ ✕	■ ✕	■ ✕	■ ✕	■ ✕

Series 31 compact cylinders tandem and multi-position versions

New version

Double-acting, magnetic

ø 12, 16, 20, 25, 32, 40, 50, 63, 80, 100 mm

1

MOVEMENT

Tandem version



Mod. 31F2A...XN

Multi-position version



Mod. 31F2A...X1/X2N

CODING EXAMPLES

32	M	2	A	032	A	050	N	2
----	---	---	---	-----	---	-----	---	---

32 SERIES

M

 VERSION:
 M = male rod thread, mounted with rod nut Mod. U
 F = female rod thread

2

 OPERATION:
 2 = double-acting

 PNEUMATIC SYMBOLS *
 CDPP

A

 MATERIALS:
 A = rolled stainless steel rod AISI 303 - AL tube profile

032

 BORE:
 012 = 12 mm - 016 = 16 mm
 020 = 20 mm - 025 = 25 mm
 032 = 32 mm - 040 = 40 mm - 050 = 50 mm
 063 = 63 mm - 080 = 80 mm - 100 = 100 mm

 PNEUMATIC SYMBOLS *
 CD5T - CD6T - CD7T
 CD5T - CD6T - CD7T
 CD2T - CD3T - CD4T
 CD2T - CD3T - CD4T

A

 CONSTRUCTION TYPE:
 A = standard

050

 STROKES (min and max):
 ø 12+25 = 1+80 mm
 ø 32+100 = 1+100 mm

N

TANDEM

2

 STAGES:
 2 = 2 stages - 3 = 3 stages - 4 = 4 stages

32	M	2	A	032	A	25/100	N
----	---	---	---	-----	---	--------	---

32 SERIES

M

 VERSION:
 M = male rod thread, mounted with rod nut Mod. U
 F = female rod thread

2

 OPERATION:
 2 = double-acting

 PNEUMATIC SYMBOLS *
 CDPP

A

 MATERIALS:
 A = rolled stainless steel rod AISI 303 - AL tube profile

032

 BORE:
 012 = 12 mm - 016 = 16 mm
 020 = 20 mm - 025 = 25 mm
 032 = 32 mm - 040 = 40 mm - 050 = 50 mm
 063 = 63 mm - 080 = 80 mm - 100 = 100 mm

 PNEUMATIC SYMBOLS *
 CD5T - CD6T - CD7T
 CD5T - CD6T - CD7T
 CD2T - CD3T - CD4T
 CD2T - CD3T - CD4T

A

 CONSTRUCTION TYPE:
 A = standard

25/100

 STROKES (min and max):
 ø 12+25 = size for x2 max 200 mm
 ø 32+63 = size for x2 max 300 mm
 ø 80+100 = size for x2 max 400 mm

N

MULTI-POSITION


* = The complete list of cylinders pneumatic symbols is available at the end of this chapter

Operating schemes

Example for ordering:

Stroke 25 mm


Mod. 31M2A032A025N2 (2 stages)

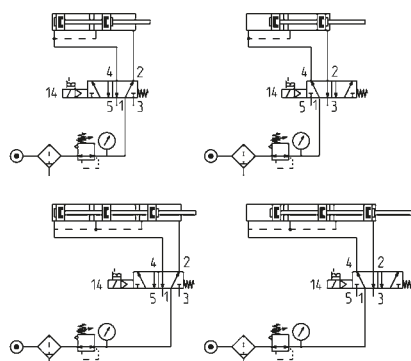

Example for ordering:

X1=25 mm and X2=100 mm

Mod. 31M2A032A25/100N

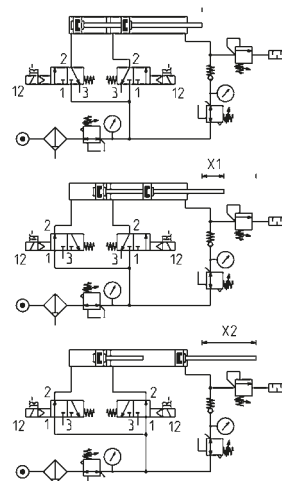

Series 90 stainless steel cylinders

Single and double-acting, cushioned, magnetic
ISO 15552 - DIN/ISO 6431- VDMA 24562
ø 32, 40, 50, 63, 80, 100, 125 mm



Mod. B



Mod. D-E



Mod. C-H



Mod. CR



Mod. L



Mod. ZC



Mod. R



Mod. ZCR



Mod. G-90



Mod. GA-90



Mod. U-90



Mod. S-90



Mod. SR-90

CODING EXAMPLE

90	M	2	A	050	A	0200	
----	---	---	---	-----	---	------	--

90

SERIES

M

VERSION:
M = standard, magnetic

2

OPERATION:
1 = single-acting, front spring
2 = double-acting, front and rear cushions
6 = double-acting, through-rod, front and rear cushions

PNEUMATIC SYMBOLS *
CS06
CD09
CD13

A

MATERIALS:
A = stainless steel AISI 316, seals in NBR
V = stainless steel AISI 316, all seals in FKM (150°C)

050

BORE:
032 = 32 mm
040 = 40 mm
050 = 50 mm
063 = 63 mm
080 = 80 mm
100 = 100 mm
125 = 125 mm

A

TYPE OF DESIGN:
A = standard with piston rod lock nut Mod. U

0200

STROKE:
25 ÷ 800 mm

= standard
V = rod seal in FKM

* = The complete list of cylinders pneumatic symbols is available at the end of this chapter

STANDARD STROKES

× = Double-acting
• = Single-acting

Ø	25	50	80	100	125	150	160	200	250	300	320	400	500
32	× •	× •	×	×	×	×	×	×	×	×	×	×	×
40	× •	× •	×	×	×	×	×	×	×	×	×	×	×
50	× •	× •	×	×	×	×	×	×	×	×	×	×	×
63	× •	× •	×	×	×	×	×	×	×	×	×	×	×
80	× •	× •	×	×	×	×	×	×	×	×	×	×	×
100	× •	× •	×	×	×	×	×	×	×	×	×	×	×
125		× •	×	×	×	×	×	×	×	×	×	×	×

Series 94 and 95 stainless steel minicylinders

Single-acting and double-acting, magnetic. CETOP RP52-P / DIN/ISO 6432

Series 94: Ø 16, 20, 25 mm

Series 95: Ø 25 mm, cushioned



1

MOVEMENT



Mod. I



Mod. G-94/90



Mod. E



Mod. GA-94/90



Mod. B



Mod. U-94/90



Mod. V-94 and U-90

CODING EXAMPLE

94	N	2	A	16	A	100	
94	SERIES: 94 = magnetic 95 = magnetic, cushioned						
N	VERSION: N = standard						
2	OPERATION: 1 = single-acting, front spring 2 = double-acting 3 = double-acting, through-rod					PNEUMATIC SYMBOLS * CS06 (S. 94) CD08 (S. 94) - CD09 (S. 95) CD12 (S. 94) - CD13 (S. 95)	
A	MATERIALS: A = stainless steel, seals in NBR V = stainless steel, all seals in FKM (150°C)						
16	BORE: 16 = 16 mm 20 = 20 mm 25 = 25 mm						
A	TYPE OF DESIGN: A = standard with locking ring for end cap Mod. V and piston rod lock nut Mod. U						
100	STROKE: 10 + 500 mm						
= standard V = rod seal in FKM							

* = The complete list of cylinders pneumatic symbols is available at the end of this chapter

STANDARD STROKES

- = Single-acting
- ✕ = Double-acting

Series	Ø	10	25	40	50	80	100	125	160	200	250	300	320	400	500
94	16	• ✕	• ✕	• ✕	• ✕	✕	✕	✕	✕	✕					
94	20	• ✕	• ✕	• ✕	• ✕	✕	✕	✕	✕	✕	✕	✕			
94	25	• ✕	• ✕	• ✕	• ✕	✕	✕	✕	✕	✕	✕	✕	✕	✕	✕
95	25	✕	✕	✕	✕	✕	✕	✕	✕	✕	✕	✕	✕	✕	✕

Series 97 stainless steel cylinders

Single and double-acting, cushioned, magnetic
 ø 32, 40, 50, 63 mm



CODING EXAMPLE

97	M	2	A	050	A	0200	
97	SERIES						
M	VERSIONS: M = rear male hinge S = articulated rear male hinge F = rear female hinge T = front and rear threaded end blocks A = front end block with pin						
2	OPERATION: 1 = single-acting, front spring 2 = double-acting, front and rear cushions 6 = double-acting, through-rod, front and rear cushions (T and A versions only)					PNEUMATIC SYMBOLS * CS06 CD09 CD13	
A	MATERIALS: A = stainless steel AISI 304 - PU seals V = stainless steel AISI 304 - FKM seals (150°C)						
050	BORE: 032 = 32 mm 040 = 40 mm 050 = 50 mm 063 = 63 mm						
A	TYPE OF DESIGN: A = standard (locking ring for end cap V + lock nut for rod U)						
0200	STROKE: 25 ÷ 800 mm						
	= standard V = rod seal in FKM						
* = The complete list of cylinders pneumatic symbols is available at the end of this chapter							

STANDARD STROKES

- = Single-acting
- ✕ = Double-acting

Ø	25	50	75	80	100	125	150	160	200	250	300	320	400	500
32	✕ •	✕ •	✕	✕	✕	✕	✕	✕	✕	✕	✕	✕	✕	✕
40	✕ •	✕ •	✕	✕	✕	✕	✕	✕	✕	✕	✕	✕	✕	✕
50	✕ •	✕ •	✕	✕	✕	✕	✕	✕	✕	✕	✕	✕	✕	✕
63	✕ •	✕ •	✕	✕	✕	✕	✕	✕	✕	✕	✕	✕	✕	✕

Series QCT and QCB cylinders with integrated guide

Double-acting, magnetic piston, guided
 ø 20, 25, 32, 40, 50, 63 mm

1

MOVEMENT



CODING EXAMPLE

QC	T	2	A	020	A	050
QC	SERIES					
T	VERSION: T = sintered bronze bushes B = linear ball bearings					
2	OPERATIONS: 2 = double-acting				PNEUMATIC SYMBOLS * CD07	
A	MATERIALS: A = anodized aluminium body - rolled stainless steel AISI 303 piston rod rolled stainless steel AISI 420B columns for QCT - hardened steel C50 columns for QCB					
020	BORE: 020 = 20 mm - 025 = 25 mm - 032 = 32 mm - 040 = 40 mm - 050 = 50 mm - 063 = 63 mm					
A	TYPE OF DESIGN: A = standard					
050	STROKE: (see the table)					
* = The complete list of cylinders pneumatic symbols is available at the end of this chapter						

STANDARD STROKES

■ = Double-acting
 Out of standard intermediate strokes available on request (strokes multiple of 5 mm)

Ø	20	25	30	40	50	75	100	125	150	175	200
20	■		■	■	■	■	■	■	■	■	■
25	■		■	■	■	■	■	■	■	■	■
32		■			■	■	■	■	■	■	■
40		■			■	■	■	■	■	■	■
50		■			■	■	■	■	■	■	■
63		■			■	■	■	■	■	■	■

Series QCTF and QCBF cylinders with integrated guide

Double-acting, magnetic, with double bearings and flanges
 ø 20, 25, 32, 40 mm



Mod. QCTF2A...A...
Mod. QCBF2A...A...



Mod. QCTF2A...B...
Mod. QCBF2A...B...



Mod. QCTF2A...C...
Mod. QCBF2A...C...

CODING EXAMPLE

QC	T	F	2	A	020	A	050
QC	SERIES						
T	TYPE OF BEARING: T = sintered bronze bushes B = linear ball bearings						
F	VERSION: F = double flange						
2	OPERATION: 2 = double-acting					PNEUMATIC SYMBOLS * CD07	
A	MATERIALS: A = anodized aluminium body - rolled stainless steel piston rod AISI 303 rolled stainless steel AISI 420B columns for QCTF - hardened steel C50 columns for QCBF						
020	BORE: 020 = 20 mm - 025 = 25 mm - 032 = 32 mm - 040 = 40 mm						
A	CUSHION: A = fixed mechanical cushion (standard) B = two shock absorbers located on the body C = one shock absorber located on the rear flange						
050	STROKE: (see the table)						
* = The complete list of cylinders pneumatic symbols is available at the end of this chapter							

STANDARD STROKES

- = Type A and C
 - ✕ = Type B
- Out of standard intermediate strokes available on request (strokes multiple of 5 mm)

Ø	20	25	30	40	50	75	100	125	150	175	200
20	■		■	■	■	■ ✕	■ ✕	■ ✕	■ ✕	■ ✕	■ ✕
25	■		■	■	■	■ ✕	■ ✕	■ ✕	■ ✕	■ ✕	■ ✕
32		■			■	■	■ ✕	■ ✕	■ ✕	■ ✕	■ ✕
40		■			■	■	■ ✕	■ ✕	■ ✕	■ ✕	■ ✕

Series QX twin cylinders

Double-acting, magnetic, guided
 ø 10x2, 16x2, 20x2, 25x2, 32x2 mm

1

MOVEMENT



CODING EXAMPLE

QX	T	2	A	020	A	050
QX	SERIES					
T	VERSION: T = sintered bronze bushes B = linear ball bearings					
2	OPERATION: 2 = double-acting (1 flange) radial / axial pressure supply 3 = double-acting through-rod (double-flange), radial pressure supply				PNEUMATIC SYMBOLS * CD15 CD16	
A	MATERIALS: A = anodized aluminium body, rolled stainless steel AISI 303 piston rod					
020	BORE: 010 = 10 mm - 016 = 16 mm - 020 = 20 mm - 025 = 25 mm - 032 = 32 mm					
A	TYPE OF DESIGN: A = standard					
050	STROKE: from 10 to 100					
* = The complete list of cylinders pneumatic symbols is available at the end of this chapter						

STANDARD STROKES

■ = Double-acting

Ø	10	20	30	40	50	75	100
10	■	■	■	■	■	■	■
16	■	■	■	■	■	■	■
20	■	■	■	■	■	■	■
25	■	■	■	■	■	■	■
32	■	■	■	■	■	■	■

Series 14 compact minicylinders

Single-acting

Bores ø 6, 10, 16 mm and strokes 5, 10, 15 mm

With super-rapid fitting ø 4 and M5 port

With non threaded piston rod



With threaded piston rod



SIZES Super-rapid fitting incorporated			SIZES Threaded port		
Mod.	Ø	STROKE	Mod.	Ø	STROKE
14N1A06A05	6	5	14N1M06A05	6	5
14N1A06A10	6	10	14N1M06A10	6	10
14N1A06A15	6	15	14N1M06A15	6	15
14N1A10A05	10	5	14N1M10A05	10	5
14N1A10A10	10	10	14N1M10A10	10	10
14N1A10A15	10	15	14N1M10A15	10	15
14N1A16A05	16	5	14N1M16A05	16	5
14N1A16A10	16	10	14N1M16A10	16	10
14N1A16A15	16	15	14N1M16A15	16	15

SIZES Super-rapid fitting incorporated			SIZES Threaded port		
Mod.	Ø	STROKE	Mod.	Ø	STROKE
14N1A06B05	6	5	14N1M06B05	6	5
14N1A06B10	6	10	14N1M06B10	6	10
14N1A06B15	6	15	14N1M06B15	6	15
14N1A10B05	10	5	14N1M10B05	10	5
14N1A10B10	10	10	14N1M10B10	10	10
14N1A10B15	10	15	14N1M10B15	10	15
14N1A16B05	16	5	14N1M16B05	16	5
14N1A16B10	16	10	14N1M16B10	16	10
14N1A16B15	16	15	14N1M16B15	16	15

CODING EXAMPLE

14	N	1	A	06	A	05
----	---	---	---	----	---	----

14 SERIES

N VERSION:
N = non-magnetic

1 OPERATION:
1 = single-acting

PNEUMATIC SYMBOL *
CS01

A TYPE OF CONNECTION:
A = tube ø 4
M = thread M5

06 BORE:
06 = 6 mm
10 = 10 mm
16 = 16 mm

A TYPE OF DESIGN:
A = non-threaded smooth piston rod
B = threaded piston rod

05 STROKE:
05 = 5 mm
10 = 10 mm
15 = 15 mm

* = The complete list of cylinders pneumatic symbols is available at the end of this chapter

Series 27 cylinders

Double-acting, magnetic
 ø 20, 25, 32, 40, 50, 63 mm

1

MOVEMENT



Mod. GKF



Mod. GK



Mod. T



Mod. GY



Mod. GA



Mod. B



Mod. B



Mod. U



Mod. V



Mod. I



Mod. I



Mod. G

CODING EXAMPLE

27	M	2	A	20	A	0050
27	SERIES					
M	VERSION: M = rear endblock with trunnion and upper round port for ø 20-25-32-40 T = rear endblock with rear round port for ø 20-25-32-40 U = rear endblock with upper round port for ø 20-25-32-40-50-63					
2	OPERATION: 2 = double-acting				PNEUMATIC SYMBOL* CD08	
A	MATERIALS: A = rolled stainless steel rod - stainless steel tube					
20	BORE: 20 = 20 mm 25 = 25 mm 32 = 32 mm 40 = 40 mm 50 = 50 mm 63 = 63 mm					
A	TYPE OF DESIGN: A = standard					
0050	STROKE: 10 ÷ 1000 mm					

* = The complete list of cylinders pneumatic symbols is available at the end of this chapter

STANDARD STROKES

Mod. 27M and 27T (ø 20 ÷ 40) and Mod. 27U (ø 20 ÷ 63)

Ø	10	25	40	50	80	100	125	160	200	250	300	320	400	500
20	■	■	■	■	■	■	■	■	■	■	■	■	■	■
25	■	■	■	■	■	■	■	■	■	■	■	■	■	■
32	■	■	■	■	■	■	■	■	■	■	■	■	■	■
40	■	■	■	■	■	■	■	■	■	■	■	■	■	■
50	■	■	■	■	■	■	■	■	■	■	■	■	■	■
63	■	■	■	■	■	■	■	■	■	■	■	■	■	■

Series 42 cylinders

Single and double-acting, magnetic, cushioned
 ø 32, 40, 50, 63 mm



Mod. V-42



Mod. GKF



Mod. GK



Mod. GY



Mod. G



Mod. P



Mod. I



Mod. GA



Mod. T



Mod. U

CODING EXAMPLE

42	M	2	N	050	A	0200
----	---	---	---	-----	---	------

42

SERIES

M

VERSION:
M= standard magnetic

2

OPERATION:
1 = single-acting, front spring
2 = double-acting, front and rear cushions
3 = double-acting, no cushion
4 = double-acting, rear cushions
5 = double-acting, front cushion
6 = double-acting, through-rod, front and rear cushions
7 = single-acting, through-rod, no cushions

PNEUMATIC SYMBOLS *

CS12

CD09

CD08

CD10

CD11

CD13

CS13

N

MATERIALS:
N = stainless steel AISI 420B rod - stainless steel AISI 304 tube - NBR seals

050

BORE:
032 = 32 mm
040 = 40 mm
050 = 50 mm
063 = 63 mm

A

TYPE OF DESIGN:
A = standard with nose nut Mod. V and piston rod lock nut Mod. U

0200

STROKE:
10 ÷ 1000 mm

* = The complete list of cylinders pneumatic symbols is available at the end of this chapter

STANDARD STROKES

✕ = Double acting
■ = Single acting

Ø	25	50	75	80	100	125	150	160	200	250	300	320	400	500
32	✕ ■	✕ ■	✕ ■	✕	✕	✕	✕	✕	✕	✕	✕	✕	✕	✕
40	✕ ■	✕ ■	✕ ■	✕	✕	✕	✕	✕	✕	✕	✕	✕	✕	✕
50	✕ ■	✕ ■	✕ ■	✕	✕	✕	✕	✕	✕	✕	✕	✕	✕	✕
63	✕ ■	✕ ■	✕ ■	✕	✕	✕	✕	✕	✕	✕	✕	✕	✕	✕

Series 69 rotary cylinders

Magnetic, cushioned

ø 32, 40, 50, 63, 80, 100, 125 mm

Rotational angles: 90°, 180°, 270° and 360°



CODING EXAMPLE

69	-	050	/	090	-	F	
----	---	-----	---	-----	---	---	--

69	SERIES	PNEUMATIC SYMBOL * CD18
----	--------	----------------------------

050	BORE: 032 = 32 mm - 040 = 40 mm - 050 = 50 mm - 063 = 63 mm 080 = 80 mm - 100 = 100 mm - 125 = 125 mm
-----	---

090	ROTATIONAL ANGLES: 090 = 90° - 180 = 180° 270 = 270° - 360 = 360°
-----	---

F	PINION: F = Female - M = Male
---	----------------------------------

	SEALS MATERIAL: = NBR - W = FKM +130°C
--	---

* = The complete list of cylinders pneumatic symbols is available at the end of this chapter

TABLE OF TORQUE FORCE IN Nm (THEORETICAL)

Bore	32	40	50	63	80	100	125
Work in Nm							
1 bar	1,2	2,25	3,9	7,3	15,7	26,35	51
2 bar	2,4	4,5	7,8	14,6	31,4	52,7	102
3 bar	3,6	6,75	11,7	21,9	47,1	79,05	153
4 bar	4,8	9	15,6	29,2	62,8	105,4	204
5 bar	6	11,25	19,5	36,5	78,5	131,75	255
6 bar	7,2	13,5	23,4	43,8	94,2	158,1	306
7 bar	8,4	15,75	27,3	51,1	109,9	184,45	357
8 bar	9,6	18	31,2	58,4	125,6	210,8	408
9 bar	10,8	20,25	35,1	65,7	141,3	237,15	459
10 bar	12	22,5	39	73	157	263,5	510

Series 30 rotary cylinders

Non magnetic, cushioned and not cushioned

ø 50, 63, 80, 100 mm

Rotational angles 90° and 180°



CODING EXAMPLE

30	-	050	/	090	-	3
----	---	-----	---	-----	---	---

30	SERIES	PNEUMATIC SYMBOL * CD17
----	--------	----------------------------

050	BORE: 050 = 50 mm - 063 = 63 mm 080 = 80 mm - 100 = 100 mm
-----	--

090	ROTATIONAL ANGLES: 090 = 90° 180 = 180°
-----	---

3	Not cushioned
---	---------------

* = The complete list of cylinders pneumatic symbols is available at the end of this chapter

TABLE OF TORQUE FORCE IN Nm (THEORETICAL)

Bore	50	63	80	100
Work in Nm				
1 bar	2,08	4,40	7,10	16,63
2 bar	4,16	8,80	14,19	33,27
3 bar	6,24	13,20	21,29	49,90
4 bar	8,32	17,61	28,39	66,54
5 bar	10,40	22,01	35,49	83,17
6 bar	12,48	26,41	42,58	99,80
7 bar	14,55	30,81	49,68	116,44
8 bar	16,63	35,21	56,78	133,07
9 bar	18,71	39,61	63,87	149,07
10 bar	20,79	44,01	70,97	166,34

Series ARP rotary actuators

Model: "Rack & Pinion"

Sizes: 1, 3, 5, 10, 12, 20, 35, 55, 70, 100, 150, 250, 400

Rotational angles: 90°



CODING EXAMPLE

ARP	-	001	-	1A	A	-	F0300	-	A	EX
ARP		SERIES								
001		SIZES: 001 = torque force 9 Nm 055 = torque force 597 Nm 003 = torque force 24 Nm 070 = torque force 825 Nm 005 = torque force 50 Nm 100 = torque force 1122 Nm 010 = torque force 100 Nm 150 = torque force 1655 Nm 012 = torque force 120 Nm 250 = torque force 2648 Nm 020 = torque force 200 Nm 400 = torque force 4800 Nm 035 = torque force 370 Nm								
1A		OPERATION: 1A = single-acting, minimum pressure of 4 bar 1B = single-acting, minimum pressure of 5 bar 1C = single-acting, minimum pressure of 5,5 bar 1D = single-acting, minimum pressure of 6 bar 2A = double-acting					PNEUMATIC SYMBOLS * CD19 CD19 CD19 CD19 CD17			
A		ROTATION ANGLE: A = 90°								
F0300		INTERFACE FOR FLANGE (ISO 5211): F0300 = F03 flange and 9mm square holes F0305 = F03 flange holes + F05 flange and 9mm square holes F0400 = F04 flange and 11mm square holes F0507 = F05 flange holes + F07 flange and 14mm square holes F0705 = F07 flange holes + F05 flange and 17mm square holes F0710 = F07 flange holes + F10 flange and 17mm square holes F1007 = F10 flange holes + F07 flange and 22mm square holes F1210 = F12 flange holes + F10 flange and 27mm square holes F1400 = F14 flange and 36mm square holes F1600 = F16 flange and 46mm square holes F2516 = F25 flange + F16 flange and 55mm square holes								
A		MATERIALS: A = standard anodized C = CNI Kanigen type nickel-plating W = all FKM seals (130°C)								
EX		ATEX certified product								
* = The complete list of cylinders pneumatic symbols is available at the end of this chapter										

* = The complete list of cylinders pneumatic symbols is available at the end of this chapter

Accessories

Switch box in technopolymer Mod. SBT (standard) e SIP (ATEX version)

Mod. SIP: intrinsic safety
ATEX version with protection
modes Ex II 2 G/D
EEx ia IIC T6 for zones
classified as 1, 2, 21 and 22

Mod.
SBT-012H0-2H
SIP702L0-2H



Switch box in aluminium Mod. SBA (standard) e SIM (ATEX version)

Mod. SIM: intrinsic safety
ATEX version with protection
modes Ex II 2 G/D
EEx ia IIC T6 for zones
classified as 1, 2, 21 and 22

Mod.
SBA-0120N-2H
SIM702N-2H



Series CGA angular grippers

Magnetic

Sizes: ø 10, 16, 20, 25, 32 mm



CODING EXAMPLE

CGA	-	20
-----	---	----

CGA	SERIES	PNEUMATIC SYMBOL *
20	SIZES: 10 = ø 10 mm 16 = ø 16 mm 20 = ø 20 mm 25 = ø 25 mm 32 = ø 32 mm	PNZ1

* = The complete list of cylinders pneumatic symbols is available at the end of this chapter

Series CGSN 180° angular grippers

Magnetic

Sizes: ø 16, 20, 25, 32 mm

New version



CODING EXAMPLE

CGSN	-	20
------	---	----

CGSN	SERIES	PNEUMATIC SYMBOL *
20	SIZES: 16 = ø 16 mm 20 = ø 20 mm 25 = ø 25 mm 32 = ø 32 mm	PNZ1

* = The complete list of cylinders pneumatic symbols is available at the end of this chapter

Series CGP parallel grippers

Magnetic

Sizes: ø 10, 16, 20, 25, 32 mm



CODING EXAMPLE

CGP	-	20
-----	---	----

CGP	SERIES	PNEUMATIC SYMBOL *
20	SIZES: 10 = ø 10 mm 16 = ø 16 mm 20 = ø 20 mm 25 = ø 25 mm 32 = ø 32 mm	PNZ1

* = The complete list of cylinders pneumatic symbols is available at the end of this chapter

Accessories

Mounting brackets

Mod.

L-CGP-16
L-CGP-20
L-CGP-25
L-CGP-32



Mounting brackets

Mod.

C-CGP-16
C-CGP-20
C-CGP-25
C-CGP-32



Series CGPT self-centering parallel grippers with T-guide

Single and double acting, magnetic, self-centering
Bores: ø 16, 20, 25, 32, 40 mm



Mod.
CGPT-16 CGPT-20 CGPT-25
CGPT-16-NC CGPT-20-NC CGPT-25-NC
CGPT-16-NO CGPT-20-NO CGPT-25-NO

CODING EXAMPLE

CGPT	-	16	-	NC	-	W	EX
------	---	----	---	----	---	---	----

CGPT SERIES

16

BORES:
10 = ø 10 mm
16 = ø 16 mm
20 = ø 20 mm
25 = ø 25 mm
32 = ø 32 mm
40 = ø 40 mm

NC

FUNCTIONING:
= double acting
NO = single acting, normally open
NC = single acting, normally closed

PNEUMATIC SYMBOL *
PNZ1
PNZ3
PNZ2

W

VERSION:
= standard
W = high temperatures (150 °C) - not magnetic

EX

Add EX to order the certified ATEX version

* = The complete list of cylinders pneumatic symbols is available at the end of this chapter

Series CGPS self-centering parallel grippers with double ball bearing guide

Single and double acting, magnetic, self-centering
Bores: ø 10, 16, 20, 25, 32 mm



Mod.
CGPS-L-10 CGPS-L-16 CGPS-L-20
CGPS-F-10 CGPS-F-16 CGPS-F-20
CGPS-L-10-NC CGPS-L-16-NC CGPS-L-20-NC
CGPS-F-10-NC CGPS-F-16-NC CGPS-F-20-NC
CGPS-L-10-NO CGPS-L-16-NO CGPS-L-20-NO
CGPS-F-10-NO CGPS-F-16-NO CGPS-F-20-NO

CODING EXAMPLE

CGPS	-	L	-	16	-	NO	-	W	EX
------	---	---	---	----	---	----	---	---	----

CGPS SERIES

L

DESIGN TYPE:
L = Long finger
F = Flat finger

16

BORES:
10 = ø 10 mm
16 = ø 16 mm
20 = ø 20 mm
25 = ø 25 mm
32 = ø 32 mm

NO

FUNCTIONING:
= double acting
NO = single acting, normally open
NC = single acting, normally closed

PNEUMATIC SYMBOL *
PNZ1
PNZ3
PNZ2

W

VERSION:
= standard
W = high temperatures (150°C)

EX

Add EX to order the certified ATEX version

* = The complete list of cylinders pneumatic symbols is available at the end of this chapter

New version

Series CGLN wide opening parallel grippers

Sizes: ø 10, 16, 20, 25, 32 mm



Mod.

CGLN-10-020

CGLN-10-040

CGLN-10-060

CGLN-16-030

CGLN-16-060

CGLN-16-080

CGLN-20-040

CGLN-20-080

CGLN-20-100

CGLN-25-050

CGLN-25-100

CGLN-25-120

CGLN-32-070

CGLN-32-120

CGLN-32-160

CODING EXAMPLE

CGLN	-	20	-	040
------	---	----	---	-----

CGLN

SERIES

PNEUMATIC SYMBOL *
PNZ1**20**

SIZES:

10 = ø 10 mm

16 = ø 16 mm

20 = ø 20 mm

25 = ø 25 mm

32 = ø 32 mm

040

STROKE

* = The complete list of cylinders pneumatic symbols is available at the end of this chapter

Series CGC 3-Finger centric grippers

Magnetic

Sizes: 50, 64, 80, 100, 125 mm



Mod.

CGC-050

CGC-064

CGC-080

CGC-100

CGC-125

CODING EXAMPLE

CGC	-	050
-----	---	-----

CGC

SERIES

PNEUMATIC SYMBOL *
PNZ1**050**

SIZE:

050 = 32 mm

064 = 45 mm

080 = 58 mm

100 = 77 mm

125 = 98 mm

* = The complete list of cylinders pneumatic symbols is available at the end of this chapter

Series RPGA sprue grippers - Size 20 mm

New version

Angular, not self-centering, single-acting, Normally Open (NO)

Models: Flat Finger, Curved Finger, Short Finger,
Flat Finger with sensor slot, Curved Finger with sensor slot


CODING EXAMPLE

RPGA	-	20	-	A
------	---	----	---	---

RPGA	SERIES	PNEUMATIC SYMBOL * PNZ2
20	SIZE: 20 = ø 20 mm	
A	TYPE OF CONSTRUCTION: A = Flat finger B = Curved finger C = Short finger with holes for extra jaws D = Flat finger for sensor E = Curved finger for sensor	

* = The complete list of cylinders pneumatic symbols is available at the end of this chapter

Series RPGB sprue grippers - Size 8, 12 mm

New version

Angular, not self-centering, single-acting, Normally Open (NO)

Models: Flat Finger, Short Finger, Flat Finger with sensor



CODING EXAMPLE

RPGB	-	12	-	A
------	---	----	---	---

RPGB	SERIES	PNEUMATIC SYMBOL * PNZ2
12	SIZE: 08 = ø 8 mm 12 = ø 12 mm	
A	TYPE OF CONSTRUCTION: A = Flat finger C = Short finger with holes for extra jaws D = Flat finger with sensor mounted (Mod. CSD-362)	

* = The complete list of cylinders pneumatic symbols is available at the end of this chapter

Accessories for Series RPGB

Series CSD magnetic proximity switches with 3-wire cable
Length cable 2 m
Mod. CSD-332



Series CSD magnetic proximity switches with male connector M8
Length cable 0,3 m
Mod. CSD-362



Extension with connector M8,
3 Pin Male / Female
Non shielded
Mod. CS-DW03HB-C250
CS-DW03HB-C500



Circular connectors M8,
3 Pin Female
With PU sheathing,
non shielded cable
Protection class IP65
Mod. CS-2
CS-5
CS-10




Series 50 rodless cylinders

Double-acting, magnetic, cushioned
 ø 16, 25, 32, 40, 50, 63, 80 mm

1

MOVEMENT

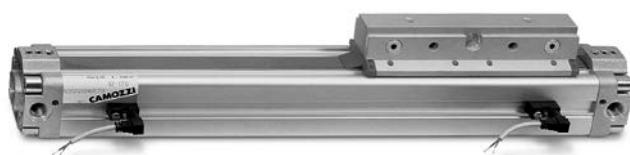

Mod. B-50



Mod. BH-50



Mod. CF-50


CODING EXAMPLE

50	M	2	P	50	A	0500
50	SERIES					
M	VERSION: M = standard magnetic					
2	OPERATION: 2 = double-acting cushioned				PNEUMATIC SYMBOL * CDSS	
P	MATERIALS: P = anodized AL profile tube - PU and NBR seals - standard carriage U = anodized AL profile tube - PU and NBR seals - flanged carriage					
50	BORE: 16 = 16 mm 25 = 25 mm 32 = 32 mm 40 = 40 mm 50 = 50 mm 63 = 63 mm 80 = 80 mm					
A	TYPE OF MOUNTING: A = standard					
0500	STROKE: for all diameters 100+4000 mm					

* = The complete list of cylinders pneumatic symbols is available at the end of this chapter

Series 52 rodless cylinders

Double-acting, magnetic, cushioned
 ø 25, 32, 40, 50, 63 mm

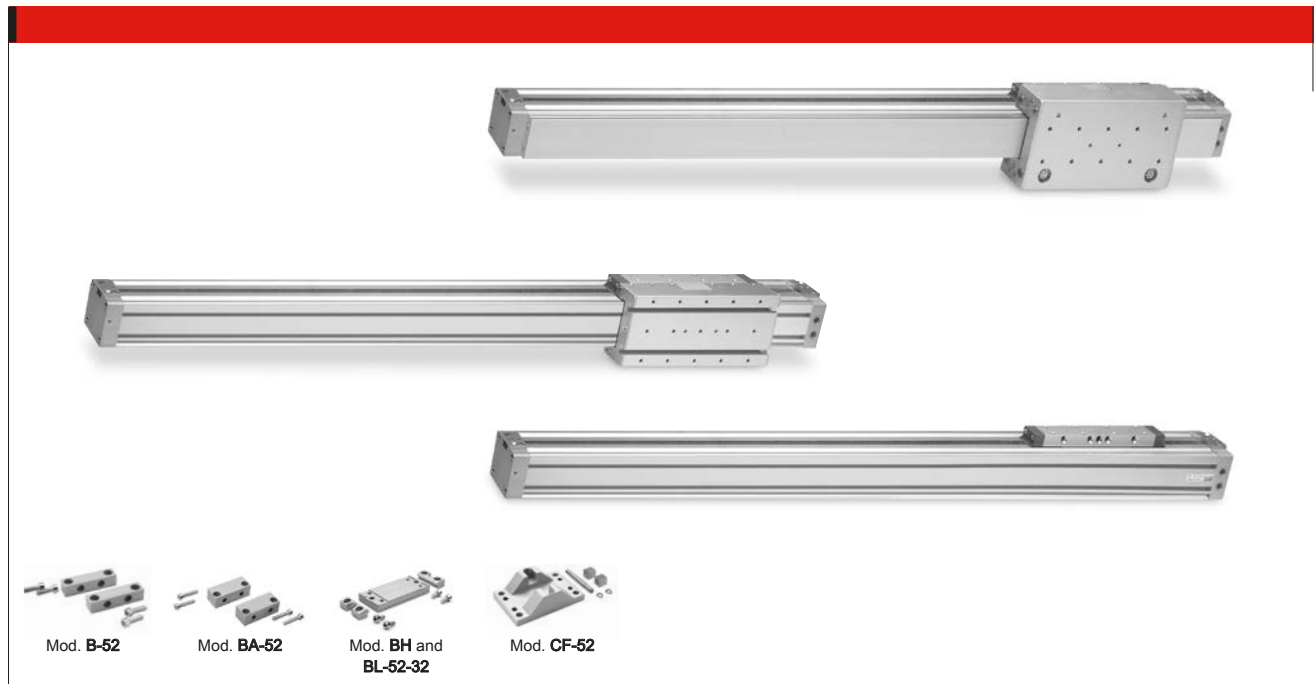

CODING EXAMPLE

52	M	2	P	40	A	0500
52	SERIES					
M	VERSION: M = standard G = with slide bearing R = with roller bearing (only ø 25 - 32 - 40)					
2	OPERATION: 2 = double-acting, cushioned, with air supply from both sides 8 = double-acting, cushioned, with air supply from one side only			PNEUMATIC SYMBOLS * CDSS CDSS		
P	MATERIALS: P = anodized AL profile tube, NBR and PU seals, standard carriage C = anodized AL profile, NBR and PU seals, short carriage					
40	BORE: 25 = 25 mm 32 = 32 mm 40 = 40 mm 50 = 50 mm 63 = 63 mm					
A	TYPE OF MOUNTING: A = standard					
0500	STROKE: Up to 6000 mm					
* = The complete list of cylinders pneumatic symbols is available at the end of this chapter						

Magnetic proximity switches

Reed - Magnetoiresistive - Hall effect

1

MOVEMENT



Mod.
CST-220 CSV-232
CSV-220 CST-332
CST-220-5 CSV-332
CST-232 CST-532



Mod.
CST-250N CST-362
CSV-250 CSV-362
CST-262 CST-562
CSV-262



Mod.
CSH-223-2 CSH-233-2
CSH-223-5 CSH-233-5
CSH-221-2 CSH-334-2
CSH-221-5 CSH-334-5



Mod.
CSH-253 CSH-364
CSH-263 CSH-463



Mod.
CSD-362



Mod.
CSB-D-220



Mod.
CSB-H-220
CSC-H-220



Mod.
CSC-D-220

CODING EXAMPLE (CSH, CST, CSV)

CS	T	-	2	2	0	N	-	5
----	---	---	---	---	---	---	---	---

CS SERIES

T SLOT TYPE:
T = T-slot - V = V-slot - H = vertical insertion

2 OPERATION:
2 = reed NO
3 = magnetoiresistive
4 = reed NC
5 = Hall effect

2 CONNECTIONS:
2 = 2 wires (Reed only)
3 = 3 wires
5 = 2 wires with M8 connector (Reed only)
6 = 3 wires with M8 connector

0 POWER SUPPLY VOLTAGE:
0 = 10-110V DC; 10-230V AC (PNP)
1 = 30-110V DC; 30-230V AC (PNP)
2 = 3 wires cst (PNP)
3 = 10-30V AC/DC (PNP)
4 = 10-27V DC (PNP)

N NOTE:
N = ACCORDING TO NORM (CST/CSV-250N only)

5 LENGTH OF THE CABLE (for CSH only):
2 = 2 m - 5 = 5 m

CODING EXAMPLE (CSB, CSC, CSD)

CS	B	-	D	-	2	2	0
----	---	---	---	---	---	---	---

CS SERIES

B TYPE OF SLOT:
B = square - C = rounded - D = round

D CABLE OUTPUT:
D = straight - H = 90°

2 OPERATION:
2 = reed NC

2 CONNECTIONS:
2 = 2 wires (Reed only)

0 SUPPLY VOLTAGE:
0 = 10-110 V DC/AC

Series CSN proximity switches

Reed switch



Switches Series CSN

For cylinders Series 40 from $\varnothing 160 \div 200$
(mounting band to be ordered separately)


For cylinders Series 40 $\varnothing 250 \div 320$

(direct mounting)

For cylinders Series 41 from $\varnothing 160 - 200$

(mounting band to be ordered separately)


Mod. **CSN 2032-0**

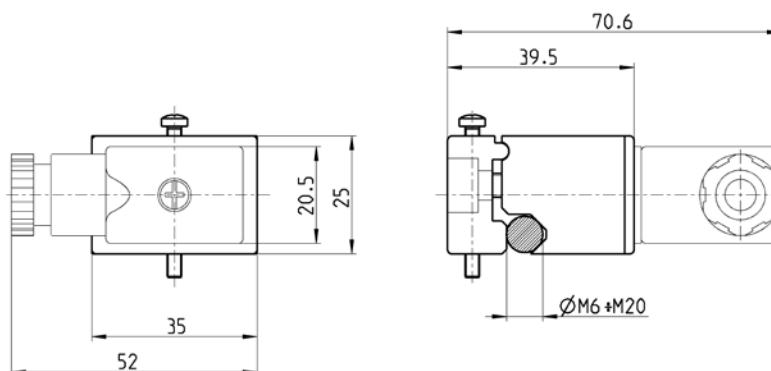

Mounting bracket for sensor Mod. CSN 2032-0

Mod. **S21** for cylinders Series 40 $\varnothing 160$ and 200


Mod. **S53** for cylinders Series 41 $\varnothing 160$ and 200

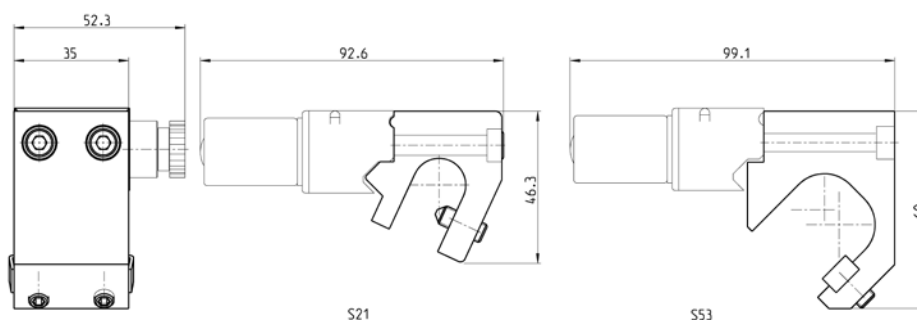

Fixing of proximity switches *


CST/CSH proximity switches can be directly mounted on the following cylinders:

Series 31 - 31R
Series 32 - 32R
Series 52
Series 61
Series 62 (CSH only)
Series 63 (CSH only)
Series 69
Series 6PF
Serie QC - QCBF - QCTF



CSV proximity switches must be assembled directly into the groove of cylinders:

Series 50 ø 16+25
Series QP - QPR ø 12+16

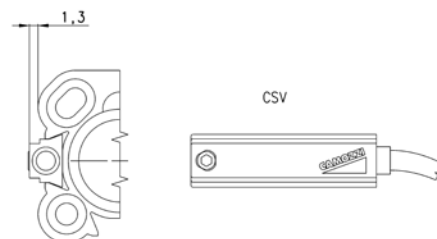

ACCESSORIES

Extension with connectors M8, 3 Pin Female

With PU sheathing, non shielded cable

Protection class: IP65

Mod. **CS-2** (cable 2 m)
CS-5 (cable 5 m)
CS-10 (cable 10 m)



Three-wire extension with connector M8, 3 Pin Male / Female

Non shielded

Mod. **CS-DW03HB-C250** (cable 2,5 m)

CS-DW03HB-C500 (cable 5 m)



Mounting brackets for Series CST and CSH proximity switches *

Mod. **S-CST-01**



Mounting brackets in technopolymer for Series CST and CSH proximity switches *

Mod. **S-CST-02**

S-CST-03

S-CST-04

S-CST-18

S-CST-19

S-CST-20

S-CST-21



Mounting brackets for Series CST and CSH proximity switches *

Mod. **S-CST-25**

S-CST-26

S-CST-27

S-CST-28



Mounting brackets in stainless steel for Series CST and CSH proximity switches *

Mod. **S-CST-05**

S-CST-06

S-CST-07

S-CST-08

S-CST-09

S-CST-10

S-CST-11

S-CST-12



Mounting brackets for Series CST and CSH proximity switches *

for cylinders Series 60 mounted with guides

Series 45NHT or 45NHB

Mod. **S-CST-45N1**

S-CST-45N2



Slot cover profile

Supplied with 500 mm tube

Slot cover profile for cylinders:

Series 31 - 31 tandem and multi-position

Series 32 - 32 tandem and multi-position

Series QCT - QCB - QCBT - QCBF

Series 61, 62, 63

Series 69

Series 6E, 5E

Mod. **S-CST-500**



* Further information in the TABLE SHOWING THE USE OF CAMOZZI MAGNETIC PROXIMITY SWITCHES on page 39

TABLE SHOWING THE USE OF CAMOZZI MAGNETIC PROXIMITY SWITCHES

Table of brackets for proximity switches

Series	Ø	CST - CSH	CSV	CSB-D/CSB-H	CSC-D/CSC-H	CSD	CSN
24 - 25	16	S-CST-02					
	20	S-CST-03					
	25	S-CST-04					
27	20	S-CST-03					
	25	S-CST-04					
	32	S-CST-18					
	40	S-CST-19					
	50	S-CST-20					
	63	S-CST-21					
31	12	Direct mounting					
	16	Direct mounting					
	20	Direct mounting					
	25	Direct mounting					
	32	Direct mounting					
	40	Direct mounting					
	50	Direct mounting					
	63	Direct mounting					
	80	Direct mounting					
	100	Direct mounting					
32	20	Direct mounting					
	25	Direct mounting					
	32	Direct mounting					
	40	Direct mounting					
	50	Direct mounting					
	63	Direct mounting					
	80	Direct mounting					
	100	Direct mounting					
40	160	S-CST-28					S21
	200	S-CST-28					S21
	250						Direct mounting
41	160						S53
	200						S53
42	32	S-CST-18					
	40	S-CST-19					
	50	S-CST-20					
	63	S-CST-21					
50	16		Direct mounting				
	25		Direct mounting				
	32	S-CST-01					
	40	S-CST-01					
	50	S-CST-01					
	63	S-CST-01					
	80	S-CST-01					
52	25	Direct mounting					
	32	Direct mounting					
	40	Direct mounting					
	50	Direct mounting					
	63	Direct mounting					
60	32	S-CST-25					
	40	S-CST-25					
	50	S-CST-25					
	63	S-CST-25					
	80	S-CST-26					
	100	S-CST-26					
	125	S-CST-27					
60 + 45N	32	S-CST-45N1					
	40	S-CST-45N1					
	50	S-CST-45N1					
	63	S-CST-45N1					
	80	S-CST-45N2					
	100	S-CST-45N2					
61	32	Direct mounting					
	40	Direct mounting					
	50	Direct mounting					
	63	Direct mounting					
	80	Direct mounting					
	100	Direct mounting					
62	125	Direct mounting					
	32	Direct mounting (CSH only)					
	40	Direct mounting (CSH only)					
	50	Direct mounting (CSH only)					
	63	Direct mounting (CSH only)					
	80	Direct mounting (CSH only)					
	100	Direct mounting (CSH only)					

TABLE SHOWING THE USE OF CAMOZZI MAGNETIC PROXIMITY SWITCHES


Table of brackets for proximity switches						
Series	Ø	CST - CSH	CSV	CSB-D/CSB-H	CSC-D/CSC-H	CSD
69	32	Direct mounting				
	40	Direct mounting				
	50	Direct mounting				
	63	Direct mounting				
	80	Direct mounting				
	100	Direct mounting				
	125	Direct mounting				
90 - 97	32	S-CST-06				
	40	S-CST-07				
	50	S-CST-08				
	63	S-CST-09				
	80	S-CST-10				
90	100	S-CST-11				
	125	S-CST-12				
94 - 95	16	S-CST-05				
	20	S-CST-05				
94	25	S-CST-05				
95	25	S-CST-06				
CGA	10			Direct mounting		
	16			Direct mounting		
	20			Direct mounting		
	25			Direct mounting		
	32			Direct mounting		
CGC	50			Direct mounting		
	64			Direct mounting		
	80			Direct mounting		
	100			Direct mounting		
	125			Direct mounting		
CGLN	10				Direct mounting	
	16				Direct mounting	
	20				Direct mounting	
	25				Direct mounting	
	32				Direct mounting	
CGP	10			Direct mounting		
	16			Direct mounting		
	20			Direct mounting		
	25			Direct mounting		
	32			Direct mounting		
CGPT	16					Direct mounting
	20					Direct mounting
	25					Direct mounting
	32					Direct mounting
	40					Direct mounting
CGSN	16				Direct mounting	Direct mounting
	20				Direct mounting	Direct mounting
	25				Direct mounting	Direct mounting
	32				Direct mounting	Direct mounting
QC	20	Direct mounting				
	25	Direct mounting				
	32	Direct mounting				
	40	Direct mounting				
	50	Direct mounting				
QP - QPR	63	Direct mounting				
	12		Direct mounting			
	16		Direct mounting			
	20	S-CST-01				
	25	S-CST-01				
	32	S-CST-01				
	40	S-CST-01				
	50	S-CST-01				
	63	S-CST-01				
	80	S-CST-01				
	100	S-CST-01				
QCBF	20	Direct mounting				
	25	Direct mounting				
	32	Direct mounting				
	40	Direct mounting				
QCTF	20	Direct mounting				
	25	Direct mounting				
	32	Direct mounting				
QX	40	Direct mounting				
	10				Direct mounting	
	16				Direct mounting	
	20				Direct mounting	
	25				Direct mounting	
	32				Direct mounting	

Series 43 hydrochecks

Bore ø 40 mm

Regulated thrust or return stroke

Skip-Stop function

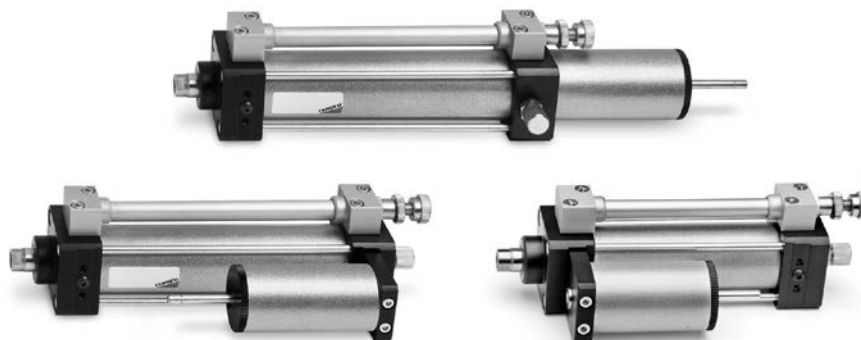

CODING EXAMPLE

43	N	-	P	S	0	-	40	-	200
43	SERIES								
N	VERSION: N = standard - S = special								
P	TANK POSITION: L = in-line tank - P = parallel tank - D = double valve, parallel tank								
S	REGULATION: S = thrust (hydrocheck's rod return regulated) - T = traction (hydrocheck's rod thrust regulated)								
0	OPERATION: A = SKIP valve - B = SKIP + STOP valve (minimum stroke 80 mm) V = STOP valve - 0 = standard								
40	BORE: 40 mm								
200	STROKE: 50, 100, 150, 200 (special stroke available on request)								


Pneumatic symbols and PART codes




Mod. 43N-LT0-40-050
43N-LT0-40-100
43N-LT0-40-150
43N-LT0-40-200
43N-PT0-40-050
43N-PT0-40-100
43N-PT0-40-150
43N-PT0-40-200




Mod. 43N-PS0-40-050
43N-PS0-40-100
43N-PS0-40-150
43N-PS0-40-200



Mod. 43N-LTV-40-050
43N-LTV-40-100
43N-LTV-40-150
43N-LTV-40-200
43N-PTV-40-050
43N-PTV-40-100
43N-PTV-40-150
43N-PTV-40-200




Mod. 43N-PSV-40-050
43N-PSV-40-100
43N-PSV-40-150
43N-PSV-40-200




Mod. 43N-LTA-40-050
43N-LTA-40-100
43N-LTA-40-150
43N-LTA-40-200
43N-PTA-40-050
43N-PTA-40-100
43N-PTA-40-150
43N-PTA-40-200



Mod. 43N-PSA-40-050
43N-PSA-40-100
43N-PSA-40-150
43N-PSA-40-200



Mod. 43N-LTB-40-050
43N-LTB-40-100
43N-LTB-40-150
43N-LTB-40-200
43N-PTB-40-050
43N-PTB-40-100
43N-PTB-40-150
43N-PTB-40-200



Mod. 43N-PSB-40-100
43N-PSB-40-150
43N-PSB-40-200

Accessories

Pump for refilling hydraulic
speed regulator
Mod. 43N-PMP



Series RL rod lock

For cylinders ISO 6431/VDMA and ISO 6432
 ø 20, 25, 32, 40, 50, 63, 80, 100, 125 mm

1

MOVEMENT



CODING EXAMPLE

RLC	-	41	-	32
-----	---	----	---	----

RLC SERIES:
 RLC = standard, complete with cartridge and housing
 RLB = cartridge only

41 CYLINDER SERIES:
 24 = for Series 24 and 25
 41 = for Series 60, 61 and 62


PNEUMATIC SYMBOL *
 RDLK

32 CYLINDER DIAMETER (mm):
 20 = 20 mm
 25 = 25 mm
 32 = 32 mm
 40 = 40 mm
 50 = 50 mm
 63 = 63 mm
 80 = 80 mm
 100 = 100 mm
 125 = 125 mm

* = The complete list of cylinders pneumatic symbols is available at the end of this chapter

ROD EXTENSION AND HOLDING FORCE

Table showing the rod extensions which are necessary for the rod lock mounting

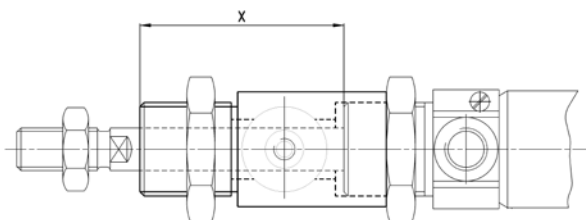

ø	Rod extension [X] (mm)	Holding force [static load] (N)
20	+50	300
25	+48	400
32	+40	650
40	+43	1100
50	+57	1600
63	+57	2500
80	+80	4000
100	+80	6300
125	+125	8800

Series SA shock absorbers

7 different sizes

Threads: M8x1, M10x1, M12x1, M14x1,5, M20x1,5, M25x1,5, M27x1,5



Mod.
SA-0806 W
SA-0806
SA-1007 W
SA-1007
SA-1210 W
SA-1210
SA-1412 W
SA-1412
SA-2015 W
SA-2015
SA-2525 W
SA-2525
SA-2725 W
SA-2725

CODING EXAMPLE

SA	-	2015	
----	---	------	--

SA SERIES

0806

SIZE/STROKE:

0806 = Size M8 x 1 / Stroke 6 mm
1007 = Size M10 x 1 / Stroke 7 mm
1210 = Size M12 x 1 / Stroke 10 mm
1412 = Size M14 x 1,5 / Stroke 12 mm
2015 = Size M20 x 1,5 / Stroke 15 mm
2525 = Size M25 x 1,5 / Stroke 25 mm
2725 = Size M27 x 1,5 / Stroke 25 mm

VERSION:

= standard, with cap
W = Without cap (on request)

Adjusted stroke nut

A = Initial position

B = Final position

1 = Impact object


2 = Adjusted stroke nut

3 = Shock absorber

4 = Fixing screw

5 = Stroke

6 = Stroke length

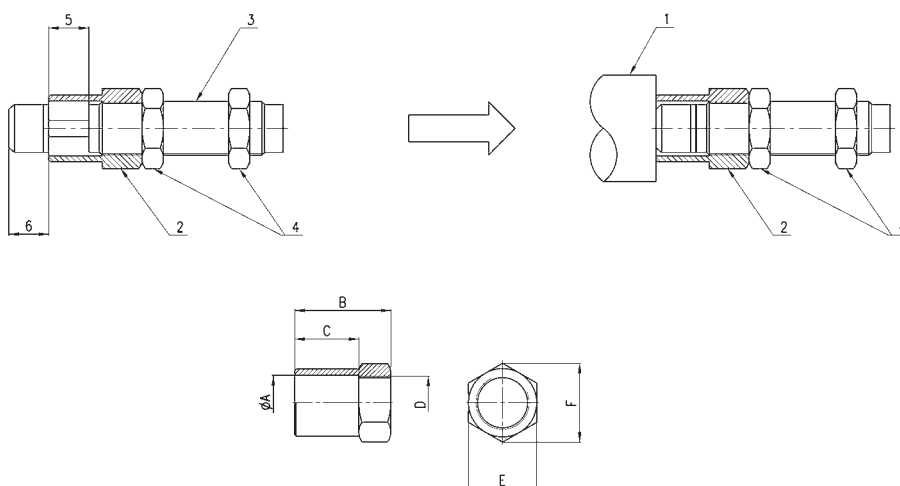

DIMENSIONS

Mod.		Ø A	B	C	D	E	F
SA-08SC	(for SA-0806)	10,5	14	9	M8X1	11	12,7
SA-10SC	(for SA-1007)	12	16	10	M10X1	13	14,7
SA-12SC	(for SA-1210)	14,5	20	13	M12X1	16	18,5
SA-14SC	(for SA-1412)	25,8	20	15	M14X1	19	21,9
SA-20SC	(for SA-2015)	27,8	35	20	M20X1,5	26	30
SA-25SC	(for SA-2525)	5,8	45	30	M25X1,5	32	37
SA-27SC	(for SA-2725)	20,7	65	50	M27X1,5	32	37

Series 6E electromechanical cylinders


New

ISO 15552

Sizes 32, 40, 50 and 63

MOVEMENT

1

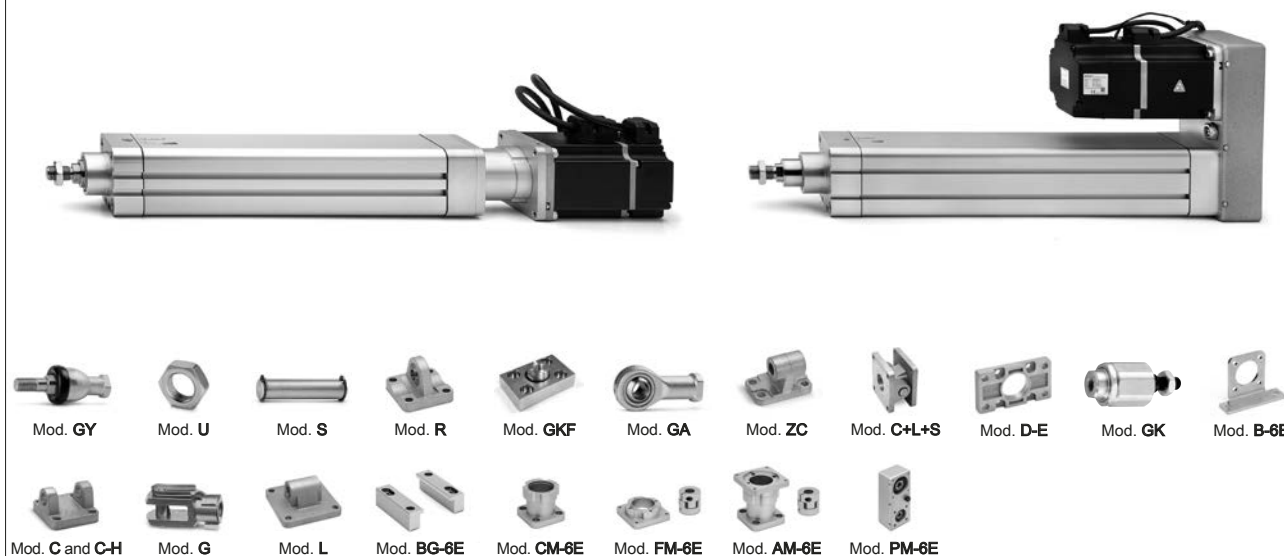

CODING EXAMPLE


6E	032	BS	0200	P05	A	
6E	SERIES					
032	SIZE: 032 = 32 mm 040 = 40 mm 050 = 50 mm 063 = 63 mm					
BS	DESIGN: BS = recirculating ball screw					
0200	STROKE: 100 ÷ 1200 mm					
P05	SCREW PITCH: P05 = 5 mm P10 = 10 mm P16 = 16 mm (for size 40 only) P20 = 20 mm (for size 50 only) P25 = 25 mm (for size 63 only)					
A	CONSTRUCTION: A = standard with rod nut VERSION: = standard (_ _ _) = extended piston rod _ _ _ mm					

STANDARD STROKES

Size	100	200	300	400	500	600	700	800	900	1000	1100	1200
32	x	x	x	x	x							
40	x	x	x	x	x	x	x					
50	x	x	x	x	x	x		x		x		
63	x	x	x	x	x			x		x		x

Series 5E electromechanical cylinders

Sizes 50, 65, 80

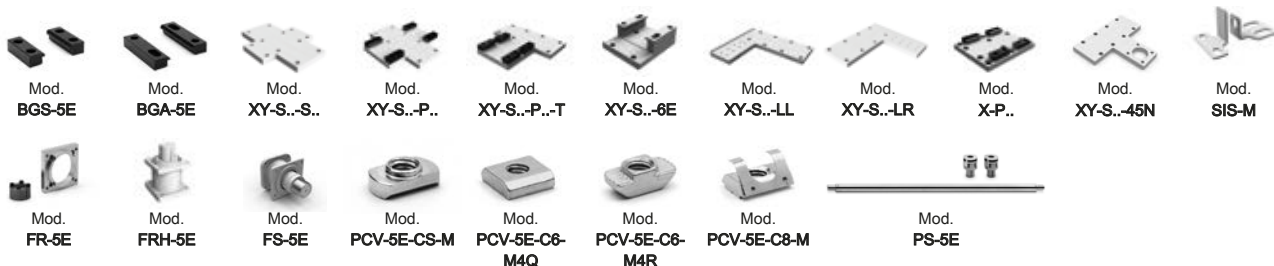

CODING EXAMPLE

5E	S	050	TBL	0200	A	S	1
5E	SERIES						
S	PROFILE: S = square section						
050	FRAME SIZE: 050 = 50x50 mm 065 = 65x65 mm 080 = 80x80 mm						
TBL	TRANSMISSION: TBL = toothed belt						
0200	TOTAL STROKE [TS]: 0050 ÷ 4000 mm for size 050 0050 ÷ 6000 mm for sizes 065 and 080						
A	VERSION: A = standard						
S	TYPE OF SLIDER: S = standard						
1	NUMBER OF SLIDERS: 1 = 1 slider						

Series DRWB drivers for the control of electric actuation

New

Driver for Brushless motors,
sizes in power classes 100, 400 and 750 W



CODING EXAMPLE

DRWB - W01 - 2 - D - E - A

DRWB	SERIES
W01	SIZE W: W01 = 100 W - W04 = 400 W - W07 = 750 W
2	SUPPLY: 2 = 220 V AC
D	COMMUNICATION: D = Digital I/O and Analog
E	FEEDBACK: E = incremental encoder 13 bit
A	VERSIONS: A = Standard

Series DRWS drivers for the control of electric actuation

New

Driver for Stepper motors, one size/version



CODING EXAMPLE

DRWS - A05 - 8 - D - 0 - A

DRWS	SERIES
A05	MAX SIZE A: A05 = 5 A
8	SUPPLY: 8 = 24V - 48V DC
D	COMMUNICATION: D = Digital I/O and Analog
0	FEEDBACK: 0 = no Feedback
A	VERSIONS: A = Standard

New

Series MTB motors for electric actuation

Brushless motors in power classes 100, 400 and 750 W



CODING EXAMPLE

MTB	-	010	-	2	-	0	-	E
-----	---	-----	---	---	---	---	---	---

MTB

SERIES

010

POWER:
010 = 100 W
040 = 400 W
075 = 750 W

2

SUPPLY:
2 = 220 V DC

0

BRAKE:
0 = without brake
F = with brake

E

ENCODER:
E = standard 13 bit

New

Series MTS motors for electric actuation

Stepper motors with Nema 23 or 24 fixing flange



CODING EXAMPLE

MTS	-	23	-	18	-	060	-	0	-	0	-	S	-	C
-----	---	----	---	----	---	-----	---	---	---	---	---	---	---	---

MTS

SERIES

23

MOTOR SIZE FLANGE CONNECTION:
23 = Nema 23
24 = Nema 24

18

RESOLUTION IN DEGREES PER REVOLUTION:
18 = 1.8° per step

060

TORQUE:
060 = 0.6 Nm with Nema 23 only
250 = 2.5 Nm with Nema 24 only

0

ELECTRICAL CONNECTION:
0 = connector

0

BRAKE:
0 = without brake

S

ENCODER VARIANTS:
S = single shaft without encoder

C

MECHANICAL SHAFT VARIANTS:
C = cylindrical shaft

Series GB planetary gearboxes

New

Available sizes: 40, 60 and 80



CODING EXAMPLE

GB	-	040	-	03	-	D	-	0100
GB	SERIES							
040	SIZE: 040 = ø 40 mm 060 = ø 60 mm 080 = ø 80 mm							
03	REDUCTION RATIO: 03 i = 3 05 i = 5 07 i = 7 10 i = 10							
D	TYPE: D = straight A = angular							
0100	PREPARATION OF THE MOTOR: 0100 = Brushless 100W (size 040 mm only) 0400 = Brushless 400W (size 060 mm only) 0750 = Brushless 750W (size 080 mm only) 0024 = Nema 24							

Series CO motion transmission devices

New

Mod. COE: elastomer coupling with clamps

Mod. COS: elastomer coupling with expansion shaft

Mod. COT: self-centering locking-set



Mod.
 COE-05-0800-0635-A
 COE-05-0800-0800-A
 COE-05-1000-0635-A
 COE-05-1200-0800-A
 COE-10-1000-1400-A
 COE-10-1200-1400-A
 COE-10-1500-0800-A
 COE-20-1500-1900-A

















Mod.
 COS-10-2000-1400-A
 COS-10-2000-0800-A
 COE-20-2600-2000-A
 COE-60-3800-2500-A
















Mod.
 COT-2000-1000
 COT-2600-1400
 COT-3800-2000


Pneumatic symbols for cylinders

Symbol	Type	Symbol	Type
CD01	Double-acting cylinder, fixed cushions	CD15	Magnetic twin rod cylinders
CD02	Double-acting cylinder, cushioned	CD16	Magnetic twin through-rod cylinders
CD03	Double-acting cylinder, adjustable rear cushion	CD17	Double-acting rotary cylinder
CD04	Double-acting cylinder, adjustable front cushion	CD18	Double-acting rotary cylinder, magnetic
CD05	Double-acting cylinder, through-rod, fixed cushions	CD19	Single-acting rotary cylinder
CD06	Double-acting cylinder, through-rod, adjustable front and rear cushion	CD2T	Magnetic tandem cylinder, two stages, fixed cushions single rear supply, sole front supply
CD07	Double-acting cylinder, magnetic	CD3T	Magnetic tandem cylinder, three stages, fixed cushions single rear supply, sole front supply
CD08	Double-acting cylinder, magnetic, fixed cushions	CD4T	Magnetic tandem cylinder, four stages, fixed cushions single rear supply, sole front supply
CD09	Double-acting cylinder, magnetic, adjustable cushions in both directions	CD5T	Magnetic tandem cylinder, two stages, fixed cushions, separated rear supplies, sole front supply
CD10	Double-acting cylinder, magnetic, adjustable rear cushion	CD6T	Magnetic tandem cylinder, three stages, fixed cushions, single rear supplies, sole front supply
CD11	Double-acting cylinder, magnetic, adjustable front cushion	CD7T	Magnetic tandem cylinder, two stages, fixed cushions, single rear supplies, sole front supply
CD12	Double-acting cylinder, magnetic, through-rod, fixed cushions	CD8T	Magnetic tandem cylinder, two stages, fixed cushions, separated rear and front supplies
CD13	Double-acting cylinder, magnetic, through-rod, adjustable cushions in both directions	CD9T	Non magnetic tandem cylinder, two stages, fixed cushions, separated rear and front supplies
CD14	Double-acting cylinder, magnetic, through-rod	CDPP	Magnetic multi-position cylinder, fixed cushions







Symbol	Type
CDSS 	Double-acting rodless cylinder, magnetic
CS01 	Single-acting cylinder, front spring
CS02 	Single-acting cylinder, front spring
CS03 	Single-acting cylinder, non cushioned
CS04 	Single-acting cylinder, through-rod
CS05 	Single-acting cylinder, through-rod, adjustable cushion
CS06 	Single-acting cylinder, magnetic
CS07 	Single-acting cylinder, front spring, adjustable rear cushion
CS08 	Single-acting cylinder, rear spring, magnetic
CS09 	Single-acting cylinder, magnetic, front spring
CS10 	Single-acting cylinder, through-rod
CS11 	Single-acting cylinder, through-rod, adjustable rear cushion
CS12 	Single-acting cylinder, front spring, adjustable rear cushion
CS13 	Single-acting cylinder, through-rod, adjustable rear cushion

Symbol	Type
CS14 	Single-acting, rear spring
HI01 	Hydrocheck, regulated rod thrust
HI02 	Hydrocheck, regulated rod return
HI03 	Hydrocheck, regulated rod thrust with stop valve
HI04 	Hydrocheck, regulated rod return with stop valve
HI05 	Hydrocheck, regulated rod thrust with skip valve
HI06 	Hydrocheck, regulated rod return with skip valve
HI07 	Hydrocheck, regulated rod thrust with skip and stop valve
HI08 	Hydrocheck, regulated rod return with skip and stop valve
PNZ1 	Double-acting magnetic gripper
PNZ2 	Single-acting, NC, magnetic gripper
PNZ3 	Single-acting, NO, magnetic gripper
RDLK 	Rod lock device

2 > Control












Directly and indirectly operated 2/2, 3/2 solenoid valves







Series K8		Directly operated solenoid valves - 8 mm 2/2-way, 3/2-way Normally Closed (NC) and Normally Open (NO)	51
Series K8B		Pilot operated solenoid valves 2/2-way, 3/2-way Normally Closed (NC) and Normally Open (NO)	52
Series K		Directly operated solenoid valves - 10 mm 3/2-way Normally Closed (NC) and Normally Open (NO) The solenoid valves can be mounted on a single base (with M5 ports) as well as on manifolds (with M5 ports)	53
Series KN		Directly operated solenoid valves - 10 mm 3/2-way Normally Closed (NC)	54
Series KN HIGH FLOW		Directly operated solenoid valves - 10 mm 3/2-way Normally Closed (NC)	55
Series W		Directly operated solenoid valves - 15 mm 3/2-way, Normally Closed (NC) and Normally Open (NO) Monostable. The solenoid valves can be mounted on a single base (with M5 ports) as well as on manifolds (with M5 ports or cartridge ø 3 and 4)	56

			Page
Series P		Directly operated solenoid valves - 15 mm 3/2-way, Normally Closed (NC) and Normally Open (NO) The solenoid valves can be mounted on a single base (with M5 ports) as well as on manifolds (with M5 ports or cartridge ø 3 and 4)	57
Series PL		Directly operated solenoid valves - 15 mm 3/2-way, Normally Closed (NC) The solenoid valves can be mounted on a single base (with M5 ports) as well as on manifolds (with M5 ports or cartridge ø 3 and 4)	58
Series PN		Directly operated solenoid valves - 15 mm 3/2-way, Normally Closed (NC) The solenoid valves can be mounted on a single base (with M5 ports) as well as on manifolds (with M5 ports or cartridge ø 3 and 4)	59
Series PD		Directly operated solenoid valves - 15 mm 2/2-way Normally Closed (NC)	60
Series PDV		Directly operated solenoid valves with separating diaphragm 2/2-way Normally Closed (NC)	61
Series A		Directly operated solenoid valves - 22 mm 2/2-way, 3/2-way Normally Closed (NC) and Normally Open (NO) Monostable - bistable (with magnetic memory) Ports: M5, G1/8. Cartridge ø 4	62
Series 6		Directly operated solenoid valves - 30 mm 2/2-way, 3/2-way Normally Closed (NC) and Normally Open (NO) Ports: G1/8, G3/8. Cartridge ø 4 Available also in version for the low temperatures up to -50°C	64
Series CFB		Solenoid valves 2/2-way, 3/2-way Normally Closed (NC) and Normally Open (NO)	65
Series CFB Stainless steel		Solenoid valves 2/2-way, 3/2-way Normally Closed (NC)	66
Series K8, K8B, K, KN, KN HIGH FLOW, W, P, PL, PN, PD, PDV, 6		Accessories for solenoid valves Connectors, manifolds, bases, sub-bases and blanking plates	67

Solenoid valves / pneumatic valves

		Page
Series 8		Pneumatic operated cartridge valves 2/2-way - 3/2-way Normally Closed (NC) 68
Series E		Valves and solenoid valves 5/2-way monostable/bistable 5/3-way CC CO CP For individual or manifold assembly Size: 10,5 mm 69
Series EN		Valves and solenoid valves 5/2-way, 5/3-way CC CO CP With outlets on the body For individual or manifold assembly Size: 16, 19 mm 72
Series 3		Valves and solenoid valves 2x3/2-way, 3/2-way, 5/2-way, 5/3-way CC CO CP Ports: G1/8, G1/4 75
Series 4		Valves and solenoid valves 3/2-way, 5/2-way, 5/3-way CC CO CP Ports: G1/8, G1/4, G1/2 78
Series 9		Valves and solenoid valves ISO 5599/1 5/2-way, 5/3-way CC CO Ports: G1/4 (size 1), G3/8 (size 2), G1/2 (size 3) 82
Series 7		Valves and solenoid valves VDMA 24563 (ISO 15407-1) 5/2-way, 5/3-way CC CO CP 84
Series NA		Valves and solenoid valves 3/2-way, 5/2-way, 5/3-way CC CO CP With holes configured according NAMUR standards 86
Series U, G, A, B, H, GP		Solenoids Version A and B Connection according to DIN 43650 and DIN 40050 standards 87

Valve islands



		Page
Series 3		Plug-In valve islands, Multipole and Fieldbus Plug-In system for Series 3 solenoid valves, G1/8 port Valve functions: 2x3/2, 5/2 and 5/3-way CO CC CP Multipole with a 25-pin Sub-D connector It can interface with all major serial communication protocols 88
Series F		Multipole and Fieldbus valve islands Multipole integrated electrical connection (PNP) Valve functions: 2x2/2; 2x3/2; 5/2; 5/3 CC It can interface with all major serial communication protocols 92
Series HN		Multipole and Fieldbus valve islands Multipole connection with 25 or 37 pins Serial connection with the most common communication protocols Valve functions: 2x2/2; 2x3/2; 5/2; 5/3 CC 97
Series Y		Individual, Multipole and Fieldbus valve islands Valve Island with Pneumatics and Electronics integrated Available versions: Individual, Multipole, Fieldbus (Profibus-DP, DeviceNet, CANopen) Valve functions: 2x2/2; 2x3/2; 5/2; 5/3 CC 103
Series CX		Multi-serial module Interface with: PROFIBUS, CANopen, DeviceNet, EtherNet/IP, PROFINET, EtherCAT Compatible with all Camozzi valve islands 106
Series 3, S, KN, Y, CX		Connectors and accessories for valve islands 109




2 > Control





Mechanical / manual valves

		Page
Series 2	 Mechanically operated minivalves 3/2-way Ports: M5. Cartridge ø 4	110
Series 1, 3	 Mechanically operated valves Series 1: 3/2-way, 5/2-way. Ports: G1/8, G1/4 Series 3: 3/2-way, 5/2-way. Ports: G1/8	111
Series 3, 4	 Mechanically operated sensor valves 3/2-way, 5/2-way Ports: G1/8, G1/4	112
Series 2, 3	 Foot operated pedal electrical and pneumatic Series 3: G1/4, 5/2-way, Normally Closed (NC) and Normally Open (NO) contacts Series 2: M5, 4/2 tube, 3/2-way, Normally Closed (NC)	113
Series 2	 Manually operated console minivalves 3/2-way, 5/3-way CC CO CP Ports: M5. Cartridge ø 4	113
Series 1, 3, 4 VMS	 Manually operated valves Series 1, 3 and 4: 3/2-way, 5/2-way, 5/3-way CC CO CP. Ports: G1/8, G1/4 Series VMS: 3/2-way. Ports: G1/8, G1/4, G3/8, G1/2	114
Series 2	 Mini-handle valves Handle with incorporated micro valve 3/2-way, Normally Closed (NC) and Normally Open (NO) Handle with incorporated micro switch	116







Logic valves

		Page
Series 2L	 Basic logic valves Cartridge ø 4 mm or - and - yes - not - memory	116

Automatic valves

		Page
Series SCS, VNR, VSO, VSC, VMR	 Automatic valves Circuit selector Mod. SCS Unidirectional valves Series VNR Quick exhaust valves Series VSO - VSC Valves with adjustable exhaust Mod. VMR	117
Series VBO, VBU	 Blocking valves Unidirectional valves (VBU) and bidirectional valves (VBO) Ports: G1/8, G1/4, G3/8, G1/2	117


Flow control valves

		Page
Series SCU, MCU, SVU, MVU, SCO, MCO	 Flow control valves Unidirectional and bidirectional banjo flow control regulators Ports: M5, G1/8, G1/4, G3/8, G1/2	118
Series PSCU, PMCU, PSVU, PMVU, PSCO, PMCO	 Flow control valves Unidirectional and bidirectional flow regulators with ports M5, G1/8, G1/4, G3/8 and banjo in brass (ports M5) or in technopolymer (ports G1/8, G1/4, G3/8)	120
Series TMCU, TMVU, TMCO	 Flow control valves Unidirectional and bidirectional banjo flow control regulators Nominal diameters ø 2 - 3,8 - 5,8 - 8 mm Ports: G1/8, G1/4, G3/8, G1/2	121
Series GSCU, GMCU, GSVU, GMVU, GSCO, GMCO	 Flow control valves Unidirectional and bidirectional banjo flow control regulators Nominal diameters ø 1,5 - 3,5 - 5 mm Ports: M5, G1/8, G1/4	122
Series RFU, RFO	 Flow control valves Unidirectional and bidirectional flow control valves Ports: M5, G1/8, G1/4, G3/8, G1/2 Nominal diameters M5 = 1,5 mm; G1/8 = 2 and 3 mm; G1/4 = 4 and 6 mm; G3/8, G1/2 = 7 mm	123
Series 28	 Flow control valves Bidirectional flow control valves Ports: G1/8, G1/4, G3/8, G1/2	123









Pressure switches and vacuum switches

		Page
Series PM, TRP, 2950	 <p>Pressure switches, transducers and pressure indicators</p> <p>Series PM adjustable-diaphragm pressure switches, with setting visual scale, with exchange contacts Series TRP electro-pneumatic transducers Series 2950 pressure indicators, ports M5</p>	124
Series SWM	 <p>Electronic miniature vacuum switches</p> <p>These vacuum switches are used in measuring ranges between -1 and 0 bar</p>	125
Series SWE	 <p>Electronic vacuum/pressure switches</p> <p>These vacuum sensors are available with analog and digital output</p>	125
Series SWD	 <p>Electronic vacuum/pressure switches</p> <p>With digital display High precision, easy to use</p>	125
Series SWDN	 <p>Electronic vacuum/pressure switches</p> <p>With digital display High precision, easy to use</p>	126
Series SWC	 <p>Electronic vacuum/pressure switches</p> <p>With digital display High precision, easy to use</p>	126
Series SWCN	 <p>Electronic vacuum/pressure switches</p> <p>With digital display High precision, easy to use</p>	126

Silencers

		Page
Series 29...	 <p>Silencers</p> <p>Ports: M5, G1/8, G1/4, G3/8, G1/2, G3/4, G1</p>	128

Proportional technology

		Page
Series AP	 <p>Directly operated proportional valves</p> <p>2/2-way proportional valves, NC Size: 16 - 22 mm Bodies with rear and lower flanges</p>	129
Series CP	 <p>Directly operated proportional solenoid valves</p> <p>2/2 NC proportional valves Sizes: 16 and 20 mm</p>	130
Series 130	 <p>Electronic control device for proportional valves</p> <p>3/3-way directly operated servo valves for the flow control</p>	131
Series LR	 <p>Analogic proportional servo valves</p> <p>3/3-way</p>	132
Series LRWD2, LRPD2, LRXD2	 <p>Digital proportional servo valves</p> <p>3/3-way directly operated servo valves for the flow (LRWD2), pressure (LRPD2) and position (LRXD2) control</p>	133
Series K8P	 <p>Electronic proportional micro regulator</p> <p>Proportional regulator for the pressure control</p>	134
Series MX-PRO	 <p>Electronic proportional regulator</p> <p>Ports: G1/2. Manifold ports: G1/2 Modular - Available with built-in pressure gauges or ports for gauges</p>	135
Series ER100, ER200	 <p>Digital electro-pneumatic regulators</p> <p>Series ER100 ports: G1/4 Series ER200 ports: G1/4, G3/8</p>	136

Series K8 directly operated solenoid valves - 8 mm

2/2-way, 3/2-way

Normally closed (NC) and normally open (NO)

For detailed information about suitable accessories, see page 67



CODING EXAMPLE

K8	0	00	-	3	0	3	-	K	2	3
----	---	----	---	---	---	---	---	---	---	---

K8 SERIES

0 BODY DESIGN:
0 = single valve

00 NUMBER OF POSITIONS:
00 = valve without seat

3 NUMBER OF WAYS - FUNCTIONS:
0 = single base
3 = 3-way NC
4 = 3-way NO
5 = 2-way NC
6 = 2-way NO

0 MATERIALS AND SEALS:
0 = poppet, FKM seals

3 NOMINAL DIAMETER:
3 = \varnothing 0,5 mm (working pressure 1 ÷ 7 bar)
6 = \varnothing 0,5 mm (working pressure -1 ÷ 4 bar)
5 = \varnothing 0,7 mm (working pressure -1 ÷ 3 bar)

K MATERIALS:
K = zinc-plated steel body, brass cage

2 ELECTRICAL CONNECTION:
2 = pin interface pitch 4 mm

3 SOLENOID VOLTAGE:
1 = 6V DC (0,6 W)
2 = 12V DC (0,6 W)
3 = 24V DC (0,6 W)

Available versions

Single body for Series K8 solenoid valve

Material: anodized aluminium

Pneumatic connections: M5 threads

Mod. **K8303/14C**



Series K8B pilot operated solenoid valves

2/2-way - 3/2-way

Normally Closed (NC) and Normally Open (NO)

For detailed information about suitable accessories, see page 67



2

CONTROL

CODING EXAMPLE

K8B	C5	4	00	-	D4	3	2	N	-	N	00	1A	C003
K8B	SERIES												
C5	BODY DESIGN: C0 = body with interface for subbase - C3 = threaded body - C5 = cartridge												
4	NUMBER OF WAYS - FUNCTIONS: 1 = 2/2-way NC - 2 = 2/2-way NO - 4 = 3/2-way NC - 5 = 3/2-way NO												
00	PNEUMATIC CONNECTIONS: 00 = cartridge - 03 = M7 - 18 = K8B-type interface, 2-way - 19 = K8B-type interface, 3-way												
D4	NOMINAL DIAMETER: D4 = Ø 3.6 mm												
3	SEALS MATERIALS: 3 = FKM												
2	BODY MATERIALS: 1 = aluminium - 2 = brass												
N	MANUAL OVERRIDE: N = not foreseen												
N	FIXING ACCESSORIES: N = not foreseen - P = screws for plastics - M = screws for metal												
00	OPTION: 00 = no option												
1A	ELECTRICAL CONNECTION: 1A = only pins, pitch 4 mm - 1B = JST connector, pitch 4 mm												
C003	VOLTAGE - POWER CONSUMPTION: C001 = 6V DC (0.6 W) - C002 = 12V DC (0.6 W) - C003 = 24V DC (0.6 W)												

Available versions

Body with threaded ports, 2/2-way NC and NO
Supplied with:
1x connector with flying leads Mod. 120-J803 (300mm)
Mod. **K8BC3103-D431N-N001B***
K8BC3203-D431N-N001B*
* = enter the required voltage
(see the CODING EXAMPLE)



Body with threaded ports, 3/2-way NC and NO
Supplied with:
1x connector with flying leads Mod. 120-J803 (300mm)
Mod. **K8BC3403-D431N-N001B***
K8BC3503-D431N-N001B*
* = enter the required voltage
(see the CODING EXAMPLE)



Body for sub-base, 2/2-way NC and NO
Supplied with:
1x connector with flying leads Mod. 120-J803 (300mm)
2x interface seals
2x screws M3x6 UNI 5931 (for M version)
or
2x screws M3x6 UNI 10227 (for P version)
Mod. **K8BC0118-D431N-*001B****
K8BC0218-D431N-*001B**
* = enter the type of screws
** = enter the required voltage
(see the CODING EXAMPLE)



Body for sub-base, 3/2-way NC and NO
Supplied with:
1x connector with flying leads Mod. 120-J803 (300mm)
3x interface seals
2x screws M3x6 UNI 5931 (for M version)
or
2x screws M3x6 UNI 10227 (for P version)
Mod. **K8BC0419-D431N-*001B****
K8BC0519-D431N-*001B**
* = enter the type of screws
** = enter the required voltage
(see the CODING EXAMPLE)









Series K directly operated solenoid valves - 10 mm

3/2-way, normally closed (NC) and normally open (NO)

The solenoid valves can be mounted on a single base (with M5 ports) as well as on manifolds (with M5 ports)

For detailed information about suitable accessories, see page 67



CODING EXAMPLE

K	0	00	-	3	0	3	-	K	2	3	
---	---	----	---	---	---	---	---	---	---	---	--

K

SERIES

0

BODY DESIGN:

0 = single sub-base (only M5) or interface
1 = manifold

00

NUMBER OF POSITIONS:

00 = interface
01 = single base (only M5)
02 + 99 = manifold number of positions

3

NUMBER OF WAYS - FUNCTIONS:

0 = manifold or single base
3 = 3-way NC
4 = 3-way NO
5 = 3-way NC electric part revolved by 180°
6 = 3-way NO electric part revolved by 180°

0

PORTS:

0 = interface
2 = M5 side outlets

3

NOMINAL DIAMETER:

3 = ø 0,65

K

MATERIALS:

K = PBT body, HNBR poppet
F = PBT body, FKM poppet

2

ELECTRICAL CONNECTION:

1 = 90° connection with protection and led
2 = 90° connection with protection
3 = 90° connection
B = in-line connection with protection and led
C = in-line connection with protection
D = in-line connection
F = cable (300 mm) with protection and led
G = cable (300 mm) with protection
H = cable only (300 mm)

3

SOLENOID VOLTAGE:

1 = 6V DC
2 = 12V DC
3 = 24V DC

FIXING:


= standard version for mounting on plastic interface
M = with screws for mounting on metal interfaces (on demand)

Series KN directly operated solenoid valves - 10 mm

3/2-way

Normally closed (NC)

For detailed information about suitable accessories, see page 67

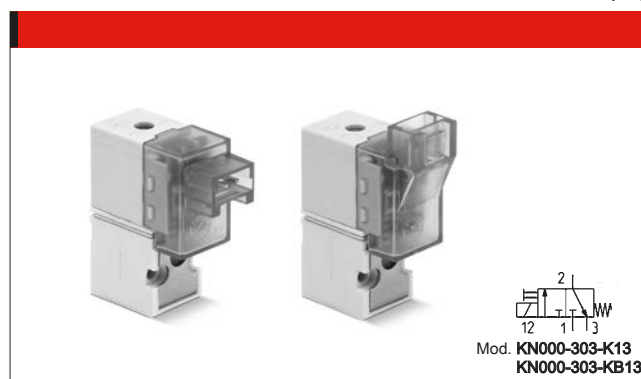

2

CONTROL

CODING EXAMPLE



KN	0	00	-	3	0	3	-	K	1	3	
KN	SERIES										
0	BODY DESIGN: 0 = single valve										
00	NUMBER OF POSITIONS: 00 = interface										
3	NUMBER OF WAYS - FUNCTIONS: 3 = 3/2-way NC										
0	PORTS: 0 = single valve										
3	NOMINAL DIAMETER: 3 = \varnothing 0,65										
K	MATERIALS: K = PBT body, HNBR poppet, NBR other seals F = PBT body, FKM poppet, NBR other seals (FKM upon request)										
1	ELECTRICAL CONNECTION: 1 = 90° connection with protection and led B = in-line connection with protection and led										
3	SOLENOID VOLTAGE: 2 = 12V DC 3 = 24V DC (1.3W) inrush (0.25W holding) other voltages are available upon request										
	FIXING: = with screws for plastics (standard) M = with screws for metal										

Series KN High Flow directly operated solenoid valves - 10 mm

3/2-way

Normally closed (NC)

For detailed information about suitable accessories, see page 67

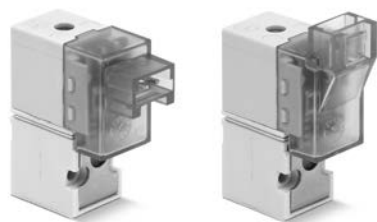

CODING EXAMPLE

KN	0	00	-	3	0	5	-	F	1	8	
----	---	----	---	---	---	---	---	---	---	---	--

KN SERIES

0 BODY DESIGN:
0 = single valve

00 NUMBER OF POSITIONS:
00 = interface

3 NUMBER OF WAYS - FUNCTIONS:
3 = 3/2-way NC

0 PORTS:
0 = single valve

5 NOMINAL DIAMETER:
5 = \varnothing 1.1 7 bar
6 = \varnothing 1.1 3 bar

F MATERIALS:
F = PBT body, FKM poppet seal, NBR other seals (FKM upon request)

1 ELECTRICAL CONNECTION:
1 = 90° connection with protection and led
B = in-line connection with protection and led

8 SOLENOID VOLTAGE:
2 = 12V DC
8 = 24V DC (4W) inrush (1W holding)

FIXING:
= with screws for plastics (standard)
M = with screws for metal

Series W directly operated solenoid valves - 15 mm


3/2-way, normally closed (NC) and normally open (NO). Monostable. The solenoid valves can be mounted on a single base (with M5 ports) as well as on manifolds (with M5 ports or cartridge \varnothing 3 and 4)

For detailed information about suitable accessories, see page 67



Mod. **W000-305-W23**
W000-303-W23
W000-305-W24
W000-303-W24

Mod. **W000-405-W23**
W000-403-W23
W000-405-W24
W000-403-W24



Mod. **W000-305-W13**
W000-303-W13

Mod. **W000-405-W13**
W000-403-W13

2

CONTROL

CODING EXAMPLE

W	0	00	-	3	0	3	-	W	2	3	
---	---	----	---	---	---	---	---	---	---	---	--

W

SERIES

0

BODY DESIGN:

0 = single sub-base (only M5) or interface
 1 = single manifold
 2 = double manifold

00

NUMBER OF POSITIONS:

00 = interface
 01 = single base (M5 only)
 02 + 99 = manifold number of positions

3

NUMBER OF WAYS - FUNCTIONS:

0 = manifold or single sub-base
 3 = 3-way NC - 4 = 3-way NO
 5 = 3-way NC electric part revolved by 180°
 6 = 3-way NO electric part revolved by 180°

0

VALVE PORTS:

0 = interface

MANIFOLD PORTS (for Series W, P and PN):

2 = M5 side
 3 = tube \varnothing 3 side
 4 = tube \varnothing 4 side
 6 = M5 rear ports
 7 = \varnothing 3 tube rear ports
 8 = \varnothing 4 tube rear ports

3

NOMINAL DIAMETER - MAX PRESSURE:

1 = \varnothing 0,8 (1W)	10 bar (NC) 24V only
3 = \varnothing 1,5 (2W)	7 bar (NC) 5 bar (NO)
5 = \varnothing 1,1 NC (2W)	10 bar (NC)
\varnothing 0,9 NO (2W)	10 bar (NO)

W

MATERIALS:

W = technopolymer PBT body, FKM poppet seal, other seals in NBR (FKM on demand)

2

ELECTRICAL CONNECTION:

1 = cables 300 mm (24V DC only)
 2 = 2 faston (24V - 48V DC)

3

SOLENOID VOLTAGE:

2 = 12 V DC
 3 = 24V DC
 4 = 48V DC



FIXING:

= with screws for metal (standard)
 P = with screws for plastics

Series P directly operated solenoid valves - 15 mm

3/2-way, normally closed (NC) and normally open (NO). The solenoid valves can be mounted on a single base (with M5 ports) as well as on manifolds (with M5 ports or cartridge \varnothing 3 and 4)

For detailed information about suitable accessories, see page 67




CODING EXAMPLE

P	0	00	-	3	0	3	-	P	5	3	
P	SERIES										
0	BODY DESIGN: 0 = single sub-base (M5 only) or interface 1 = single manifold 2 = double sided manifold										
00	NUMBER OF POSITIONS: 00 = interface 01 = single base (M5 only) 02 + 99 = manifold number of positions										
3	NUMBER OF WAYS - FUNCTIONS: 0 = manifold or single base 3 = 3-way NC 4 = 3-way NO 5 = 3-way NC electric part revolved by 180° 6 = 3-way NO electric part revolved by 180°										
0	VALVE PORTS: 0 = interface (for single valve only) MANIFOLD PORTS (for Series W, P and PN): 2 = M5 side port 3 = \varnothing 3 tube side port 4 = \varnothing 4 tube side port 6 = M5 rear ports 7 = \varnothing 3 tube rear ports 8 = \varnothing 4 tube rear ports										
3	NOMINAL DIAMETER - MAX PRESSURE 1 = \varnothing 0,8 (1W) 10 bar (NC) 24V only 3 = \varnothing 1,5 (2W) 7 bar (NC) 5 bar (NO) 5 = \varnothing 1,1 NC (2W) 10 bar (NC) \varnothing 0,9 NO (2W) 10 bar (NO) 6 = \varnothing 1,5 NC (2W) 3 bar (NC) (Voltage tolerance from +10% to -25%)										
P	MATERIALS: P = technopolymer PBT body, FKM poppet seal, other seals in NBR (FKM on demand)										
5	ELECTRICAL CONNECTION: 5 = 3 faston pitch 9,4										
3	SOLENOID VOLTAGE: B = 24V 50/60 Hz C = 48V 50/60 Hz D = 110V 50/60 Hz 3 = 24V DC 4 = 48V DC 6 = 110V										
	FIXING: = with screws for metal (standard) P = with screws for plastics										

Series PL directly operated solenoid valves - 15 mm

3/2-way, normally closed (NC). These solenoid valves can be mounted on a single base (with M5 ports) as well as on manifolds (with M5 ports or cartridge ø 3 and 4)
For detailed information about suitable accessories, see page 67



2

CONTROL


CODING EXAMPLE

PL	0	00	-	3	0	3	-	PL	2	3
PL	SERIES									
0	BODY DESIGN: 0 = single sub-base (M5 only) or interface 1 = single manifold 2 = double sided manifold									
00	NUMBER OF POSITIONS: 00 = interface 01 = single base (M5 only) 02 ÷ 99 = manifold number of positions									
3	NUMBER OF WAYS - FUNCTIONS: 0 = manifold or single base 3 = 3-way NC 5 = 3-way NC electric part revolved by 180°									
0	VALVE PORTS: 0 = interface (for single valve only) MANIFOLD PORTS: 2 = M5 side port 3 = ø 3 tube side port 4 = ø 4 tube side port 6 = M5 rear ports 7 = ø 3 tube rear ports 8 = ø 4 tube rear ports									
3	NOMINAL DIAMETER 3 = ø 1,5 6 = ø 1,5 NC (for use with vacuum)									
PL	MATERIALS: PL = technopolymer PBT body, FKM poppet seal, other seals in NBR									
2	ELECTRICAL CONNECTION: 2 = 2 faston pitch 9,4									
3	SOLENOID VOLTAGE: 3 = 24V DC 2 = 12V DC									

Series PN directly operated solenoid valves - 15 mm

3/2-way, normally closed (NC). The solenoid valves can be mounted on a single base (with M5 ports) as well as on manifolds (with M5 ports or cartridge ø 3 and 4)

For detailed information about suitable accessories, see page 67



CODING EXAMPLE

PN	0	00	-	3	0	1	-	P	5	3	
PN	SERIES										
0	BODY DESIGN: 0 = single sub-base 1 = single manifold 2 = double sided manifold										
00	NUMBER OF POSITIONS: 00 = interface 01 = single base (M5 only) 02 + 99 = manifold number of positions										
3	NUMBER OF WAYS - FUNCTIONS: 0 = manifold or single base 3 = 3-way NC										
0	VALVE PORTS: 0 = interface (for single valve only) MANIFOLD PORTS (for Series W, P and PN): 2 = M5 side port 3 = ø 3 tube side port 4 = ø 4 tube side port 6 = M5 rear ports 7 = ø 3 tube rear ports 8 = ø 4 tube rear ports										
1	NOMINAL DIAMETER - MAX PRESSURE 1 = ø 0,8 (1W) 10 bar (NC) 24V only										
P	MATERIALS: P = PBT body, PU poppet seal										
5	ELECTRICAL CONNECTION: 5 = 3 faston pitch 9,4										
3	SOLENOID VOLTAGE: 3 = 24V DC 4 = 48V DC 6 = 110V DC 7 = 205V DC										
	FIXING: = standard for the mounting on plastic interfaces M = with screw for the mounting on metal interface (on demand)										

Series PD directly operated solenoid valves - 15 mm

2/2-way

Normally closed (NC)

For detailed information about suitable accessories, see page 67



Mod. **PD000-2A1-R53**
PD000-2A2-R55
PD000-2A3-R55
PD000-2A4-R58
PD000-2A5-R58



Mod. **PD000-2C1-R53**
PD000-2C2-R55
PD000-2C3-R55
PD000-2C4-R58
PD000-2C5-R58



Mod. **PD000-2E1-R53**
PD000-2E2-R55
PD000-2E3-R55

2

CONTROL

CODING EXAMPLE

PD	0	00	-	2	A	1	-	R	5	3	
----	---	----	---	---	---	---	---	---	---	---	--

PD

SERIES

0BODY DESIGN:
0 = single body**00**NUMBER OF POSITIONS:
00 = interface**2**NUMBER OF WAYS - FUNCTIONS:
2 = 2-way NC**A**BODY MATERIALS AND VALVE PORTS:
A = aluminium body, rear pneumatic interface
C = aluminium body, low pneumatic interface
E = brass body, M5 ports (for \varnothing up to 1.6 mm)**1**NOMINAL DIAMETER:
1 = \varnothing 0.8
2 = \varnothing 1.2
3 = \varnothing 1.6
4 = \varnothing 2
5 = \varnothing 2.5**R**POPPET SEAL MATERIALS:
R = NBR
F = FKM (on request)**5**ELECTRICAL CONNECTION:
5 = 3 faston pitch 9.4**3**SOLENOID VOLTAGE:
1 = 12V DC 1W
2 = 12V DC 2W
3 = 24V DC 1W
5 = 24V DC 2W
8 = 24V DC 4W


FIXING:

= with screws for metal (standard)
P = with screws for plastics

Series PDV directly operated solenoid valves with separating diaphragm

2/2-way Normally Closed (NC)

For detailed information about suitable accessories, see page 67



Mod. PDVC0122-A73GN-M00* PDVC0122-B73GN-M00*
 PDVC0122-A73GN-MVC* PDVC0122-B73GN-MVC*
 PDVC0122-A74GN-M00* PDVC0122-B74GN-M00*
 PDVC0122-A74GN-MVC* PDVC0122-B74GN-MVC*
 PDVC0122-A75GN-M00* PDVC0122-B75GN-M00*
 PDVC0122-A75GN-MVC* PDVC0122-B75GN-MVC*
 PDVC0122-B33GN-M00* PDVC0122-C13GN-M00*
 PDVC0122-B33GN-MVC* PDVC0122-C13GN-MVC*
 PDVC0122-B34GN-M00* PDVC0122-C14GN-M00*
 PDVC0122-B34GN-MVC* PDVC0122-C14GN-MVC*
 PDVC0122-B35GN-M00* PDVC0122-C15GN-M00*
 PDVC0122-B35GN-MVC* PDVC0122-C15GN-MVC*

* = to complete the code, add
 ELECTRICAL CONNECTION (see the CODING EXAMPLE)

CODING EXAMPLE

PDV	C0	1	22	-	B7	3	G	N	-	M	00	4A	C023
-----	----	---	----	---	----	---	---	---	---	---	----	----	------

PDV SERIES

C0 BODY DESIGN:
 0 = body with interface for subbase

1 NUMBER OF WAYS - FUNCTIONS:
 1 = 2/2-way NC

22 PNEUMATIC CONNECTIONS:
 22 = PDV-type interface, 2-way

B7 NOMINAL DIAMETER:
 A7 = \varnothing 0.8 mm
 B3 = \varnothing 1.2 mm
 B7 = \varnothing 1.6 mm
 C1 = \varnothing 2.0 mm

3 SEAL MATERIAL:
 3 = FKM
 4 = EPDM
 5 = FFKM

G BODY MATERIAL:
 G = PEEK

N MANUAL OVERRIDE:
 N = not foreseen

M FIXING ACCESSORIES:
 M = screws for metal

00 OPTIONS:
 00 = none
 VC = for vacuum applications

4A ELECTRICAL CONNECTION:
 3A = DIN 43650 connector (C Form), pitch 8 mm
 3C = DIN 43650 connector (C Form), pitch 8 mm with coil rotated 180°
 4A = DIN 43650 connector (C Form), pitch 9.4 mm
 4C = DIN 43650 connector (C Form), pitch 9.4 mm with coil rotated 180°
 7A = cables (L = 300 mm)
 7C = cables (L = 300 mm) with coil rotated 180°

C023 VOLTAGE - ABSORPTION:
 C017 = 6V DC 2W
 C020 = 12V DC 2W
 C023 = 24V DC 2W

Series A directly operated solenoid valves - 22 mm






2/2-way, 3/2-way

Normally closed (NC) and normally open (NO). Monostable - bistable (with magnetic memory).



Ports: M5, G1/8. Cartridge \varnothing 4




* = choose the most suitable solenoid
(see the coding example)
Note: For the use of NO valves
in line, use the coil model U771
or U7K1 or G771 or G7K1





* = choose the most suitable solenoid
(see the coding example)
Note: For the use of NO valves
in line, use the coil model U771
or U7K1 or G771 or G7K1




* = choose the most suitable solenoid
(see the coding example)




* = choose the most suitable solenoid
(see the coding example)



* = choose the most suitable solenoid
(see the coding example)



* = choose the most suitable solenoid
(see the coding example)



CODING EXAMPLE

A	3	3	1	-	0	C	2	-	U7	7
---	---	---	---	---	---	---	---	---	----	---

A SERIES**3**

BODY DESIGN:

- 1 = base (24x24 mm) interface rotatable through 360°
 2 = base (24x24 mm) fixed interface
 3 = threaded body
 4 = rapid exhaust body
 5 = base with ISO standard interface, fixed body in technopolymer
 6 = (16x16 mm) interface rotatable through 360°
 A = single manifold
 B = 2-part manifold
 C = 3-part manifold
 D = 4-part manifold
 E = 5-part manifold
 F = 6-part manifold
 G = 7-part manifold
 H = 8-part manifold
 K = 9-part manifold
 L = 10-part manifold
 M = 11-part manifold
 N = 12-part manifold
 P = 13-part manifold
 R = 14-part manifold
 S = 15-part manifold

3

NUMBER OF PORTS:

- 2 = 2 way
 3 = 3 way

1

FUNCTION:

- 1 = NC
 2 = NO
 3 = NO in line

0

PORTS:

- | | | |
|---------------------------|-----------|-------------------------|
| 1 | 2 | 3 |
| 0 M5 | M5 | M5 |
| 1 G1/8 | G1/8 | M5 |
| 3 M5 | G1/8 male | M5 |
| 4 M5 | G1/8 male | M5 with manual override |
| A swivel O-ring interface | | M5 |
| B fixed O-ring interface | | M5 |
| C cartridge ø 4 | | |

C

NOMINAL DIAMETER:

- C = ø 1,5
 D = ø 2
 E = ø 2,5

2

BODY MATERIAL:

- 2 = nickel-plated brass
 3 = technopolymer

U

ENCAPSULATING MATERIAL / SOLENOID DIMENSIONS:

- A8 = PPS / 30x30
 G7 = PA / 22x22
 G8 = PA / 30x30 (24 V DC only)
 G9 = PA / 22x58
 H8 = PA 6 V0 / 30x30
 U7 = PET / 22x22

7

SOLENOID VOLTAGE:

		U7**	G7**	A8**	H8**	G9**
B	24V AC 50/60Hz	-	-	5VA	5,3VA	-
C	48V AC 50/60Hz	-	-	-	5,3VA	-
D	110V AC 50/60Hz	-	-	5VA	5,3VA	-
E	230V AC 50/60Hz	-	-	5VA	5,3VA	-
F	380V AC 50/60Hz	7VA	7VA	-	-	-
H	24V 50/60Hz 3,5VA	3,5VA	-	-	-	-
	12V DC	3,1W	3,1W	-	-	-
K	72V DC	4,8W	4,8W	-	-	-
	110V AC 50/60Hz	3,8VA	3,8VA	-	-	-
	125V AC 50/60Hz	5,5VA	5,5VA	-	-	-
K1*	72V DC	5,6W	5,6W	-	-	-
	110V AC 50/60Hz	5,8VA	5,8VA	-	-	-
	125V AC 50/60Hz	8,3VA	8,3VA	-	-	-
J	230V AC 50/60Hz	3,5VA	3,5VA	-	-	-
	240V AC 50/60Hz	4VA	4VA	-	-	-
1	6V DC	5,1W	5,1W	-	-	-
2	12V DC	5W	5W	-	-	-
3	24V DC	5W	5W	4W	5,4W	4/2W
4	48V DC	5,3W	5,3W	4W	-	-
6	110V DC	4,2W	4,2W	-	-	-
7	24V DC	3,1W	3,1W	-	-	-
	48V AC 50/60 Hz	3,5VA	3,5VA	-	-	-
71*	24V DC	3,1W	3,1W	-	-	-
	48V AC 50/60Hz	3,5VA	3,5VA	-	-	-
9	48V DC	3,1W	3,1W	-	-	-
10	110V DC	3,2W	3,2W	-	-	-

* = only for valves NO in-line


** = substitute 0 with letter or number at the beginning of the line

Series 6 directly operated solenoid valves - 30 mm



2/2-way - 3/2-way. Normally closed (NC) and normally open (NO). Ports: G1/8, G3/8. Cartridge ø 4

Available also in version for the low temperatures up to -50°C


For detailed information about suitable accessories, see page 67




* = choose the suitable solenoid (see the coding example)



* = choose the suitable solenoid (see the coding example)



* = choose the suitable solenoid (see the coding example)



* = choose the suitable solenoid (see the coding example)

CODING EXAMPLE

6	3	8	M	-	105	-	A	6	B
---	---	---	---	---	-----	---	---	---	---

6

SERIES

3

NUMBER OF PORTS AND FUNCTIONS:

- 0 = interface
- 1 = 2 way NO
- 2 = 2 way NC
- 3 = 3 way NC
- 4 = 3 way NO

8

CONNECTION:

- 0 = interface
- 3 = G3/8
- 8 = G1/8
- C = cartridge ø 4

M

M = manifold

105

TYPE OF BODY:

- 150 = threaded body
- 450 = base with rotatable interface
- 457 = base with fixed interface
- 101 = single manifold
- 102 = 2 - part manifold
- 103 = 3 - part manifold
- 104 = 4 - part manifold
- 105 = 5 - part manifold
- 106 = 6 - part manifold
- 107 = 7 - part manifold
- 108 = 8 - part manifold
- 109 = 9 - part manifold
- 110 = 10 - part manifold
- 111 = 11 - part manifold
- 112 = 12 - part manifold
- 113 = 13 - part manifold
- 114 = 14 - part manifold
- 115 = 15 - part manifold

A

COIL MATERIAL:

A = PPS

6

SOLENOID DIMENSIONS:

6 = 32x32

B

SOLENOID VOLTAGE:

- B = 24V 50/60Hz
- D = 110V 50/60 Hz
- E = 230V 50/60 Hz
- 2 = 12V DC
- 3 = 24V DC
- 4 = 48V DC
- 6 = 110V DC

VERSIONS:




= standard

LT = for low temperatures


Series CFB solenoid valves

2/2-way, 3/2-way


Normally closed (NC) and normally open (NO)




* = choose the suitable solenoid (see the coding example)



* = choose the suitable solenoid (see the coding example)



* = choose the suitable solenoid (see the coding example)



* = choose the suitable solenoid (see the coding example)

CODING EXAMPLE

CFB	-	A	1	3	L	-	R	1	-	B7	E
-----	---	---	---	---	---	---	---	---	---	----	---

CFB

SERIES

A

OPERATION:

A = indirect
B = direct with linked diaphragm
D = direct

1

NUMBER OF WAYS - POSITIONS:

1 = 2/2-way NO
2 = 2/2-way NC
3 = 3/2-way NC

3

CONNECTIONS:

1 = G1/8
2 = G1/4
3 = G3/8
4 = G1/2
5 = G3/4
6 = G1
7 = G1 1/4
8 = G1 1/2
9 = G2

L

NOMINAL DIAMETER:

A = 1,4 mm - B = 2 mm - C = 2,5 mm - D = 2,8 mm - F = 4 mm - G = 6 mm - J = 8 mm - L = 11,5 mm - M = 13 mm - N = 13,5 mm
P = 18 mm - R = 26 mm - T = 32 mm - X = 45 mm - Z = 50 mm

R

DIAPHRAGM MATERIAL:

R = NBR - W = FKM - E = EPDM (ond demand)

1

BODY MATERIAL:

1 = brass
2 = alimentary anti-limestone nickel-plated brass for high temperatures (on demand)
3 = alimentary nickel-plated brass (on demand)

B7

SOLENOID DIMENSION:

B7 = 22 mm - B8 = 30 mm - B9 = 36 mm

E

SOLENOID VOLTAGE:


B = 24V AC 50 Hz
D = 110V AC 50/60 Hz
E = 230V AC 50/60 Hz
2 = 12V DC
3 = 24V DC

NOTE: for some directly operated 2/2 NO solenoid valves, the solenoid to be used is the B8*K type
(for further details see also the TABLE FOR THE COUPLING BETWEEN SOLENOIDS AND VALVES in the Camozzi's catalogue on page 2/1.30.03)

Series CFB Stainless Steel solenoid valves

2/2-way, 3/2-way

Normally closed (NC)



Mod. CFB-D21A-...X-*
 CFB-D21B-...X-*
 CFB-D21C-...X-*
 CFB-D22B-...X-*
 CFB-D22C-...X-*
 CFB-D22E-...X-*
 CFB-D23E-...X-*
 CFB-D23F-...X-*
 CFB-D24E-...X-*
 CFB-D24F-...X-*

* = choose the suitable solenoid (see the coding example)

2

CONTROL

CODING EXAMPLE

CFB	-	D	2	1	A	-	W	X	-	B8	E
-----	---	---	---	---	---	---	---	---	---	----	---

CFB SERIES

D OPERATION:
D = direct

2 NUMBER OF WAYS - POSITIONS:
2 = 2/2-way NC
3 = 3/2-way NC

1 CONNECTIONS:
1 = G1/8
2 = G1/4
3 = G3/8
4 = G1/2

A NOMINAL DIAMETER:
A = 1.5 mm
B = 2 mm
C = 2.5 mm
E = 3 mm
F = 4 mm

W SEALS MATERIAL:
W = FKM
E = EPDM (on demand)

X BODY MATERIAL:
X = stainless steel

B8 SOLENOID DIMENSION:
B8 = 30 mm

E SOLENOID VOLTAGE:
B = 24V AC 50 Hz
D = 110V AC 50/60 Hz
E = 230V AC 50/60 Hz
2 = 12V DC
3 = 24V DC

Accessories for solenoid valves

Connectors, manifolds, bases, sub-bases and blanking plates

2

CONTROL

Connectors with crimped cable for Series K8

Cable section: 0.25 mm²
Cable external diameter: 1.2 mm
Material for the cable insulation: PVC
Mod. **120-803** (cable 300 mm)
120-806 (cable 600 mm)



Connector J with crimped cable for Series K8 and K8B

Cable section: 0.25 mm²
Cable external diameter: 1.2 mm
Material for the cable insulation: PVC
Mod. **120-J803** (cable 300 mm)



Connectors with crimped cable for Series K, KN and KN High Flow

Mod. **121-803** (cable 300 mm)
121-806 (cable 600 mm)
121-810 (cable 1000 mm)
121-830 (cable 3000 mm)



Connectors DIN 43650, pin spacing 9,4 mm for Series P, PL, PN, PD and PDV

Mod. **125-601**
125-701
125-800



Connectors DIN 43650, pin spacing 9,4 mm with cable for Series P, PL, PN, PD and PDV

The internal rectifier circuit of the connector Mod. 125-900 allows to use solenoid valves with different AC voltage, even if the voltage indicated on the solenoid valve is DC
Mod. **125-501-2** (cable 2000 mm)
125-550-1 (cable 1000 mm)
125-601-2 (cable 2000 mm)
125-571-3 (cable 3000 mm)
125-900 (cable 2000 mm)



In-line connectors with moulded cable for Series P, PL, PN, PD and PDV

Mod. **125-503-2** (cable 2000 mm)
125-503-5 (cable 5000 mm)
125-553-2 (cable 2000 mm)
125-553-5 (cable 5000 mm)



In-line connectors with moulded cable and bridge rectifier for Series P, PL, PN, PD and PDV

Mod. **125-903-2** (cable 2000 mm)
125-903-5 (cable 5000 mm)



Connectors DIN 43650 pin spacing 8 mm for Series PDV and W

To be used in all DC valves with voltages from 6 to 110 V
Mod. **126-550-1** (cable 1000 mm)
126-800
126-701



Connectors DIN 43650 for Series 6

Protection class IP65
Mod. **124-800**
124-702
124-701
124-703



Single manifolds with rear outlets for Series W, P, PL and PN

Mod. **P102-0*** (2 positions)
P103-0* (3 positions)
P104-0* (4 positions)
P105-0* (5 positions)
P106-0* (6 positions)



* = see the MANIFOLD PORTS in the CODING EXAMPLE TABLE of the reference Series

Single manifolds with front outlets for Series W, P, PL and PN

This manifold is arranged to be fixed through DIN 46277/3 guide together with the accessory PCF-E520
Mod. **P102-0*** (2 positions)
P103-0* (3 positions)
P104-0* (4 positions)
P105-0* (5 positions)
P106-0* (6 positions)



* = see the MANIFOLD PORTS in the CODING EXAMPLE TABLE of the reference Series

Double sided manifolds with rear outlets for Series W, P, PL and PN

Mod. **P204-0*** (4 positions)
P206-0* (6 positions)
P208-0* (8 positions)
P210-0* (10 positions)
P212-0* (12 positions)



* = see the MANIFOLD PORTS in the CODING EXAMPLE TABLE of the reference Series

Double sided manifolds with front outlet for Series W, P, PL and PN

This manifold is arranged to be fixed through DIN 46277/3 guide together with the accessory PCF-E520
Mod. **P204-0*** (4 positions)
P206-0* (6 positions)
P208-0* (8 positions)
P210-0* (10 positions)
P212-0* (12 positions)



* = see the MANIFOLD PORTS in the CODING EXAMPLE TABLE of the reference Series

Manifold with side outlets and conveyed inlet and exhaust for Series K

Note: use solenoid valves with mounting screws on metal interfaces (see the CODING EXAMPLE TABLE of Series K)
Mod. **K1**-02**
** = N° of positions



Single sub-base for Series P, PL and PN

Mod. **P001-02**



Single sub-base for Series K

Note: use solenoid valves with mounting screws on metal interfaces (see the CODING EXAMPLE TABLE of Series K)
Mod. **K001-02**



Excluder tap for Series K

Supplied with:
1x excluder tap
1x interface seal
2x screws
Mod. **K000-TP**



Excluder tap for Series P, PL and PN

Supplied with:
1x excluder tap,
1x interface seal,
2x screws
Mod. **P000-TP**



Series 8 pneumatic operated cartridge valves

2/2-way, 3/2-way

Normally closed (NC)



2

CONTROL

CODING EXAMPLE

8	10	C5	1	00	-	F1	3	2
8	SERIES							
10	TAGLIA: 10 = Size 1 20 = Size 2 30 = Size 3							
C5	BODY DESIGN: C5 = cartridge							
1	NUMBER OF WAYS - FUNCTIONS: 1 = 2/2-way NC or 3/2-way NC NOTE: The function depends on the seat used (for further details see the Camozzi's catalogue)							
00	PNEUMATIC CONNECTIONS: 00 = cartridge							
F1	DIAMETRO NOMINALE: F1 = ø 5.0 mm (size 1 only) G7 = ø 6.6 mm (size 2 only) K1 = ø 9.0 mm (size 3 only)							
3	SEAL MATERIAL: 3 = FKM							
2	BODY MATERIAL: 2 = brass							

Series E valves and solenoid valves

5/2-way monostable/bistable - 5/3-way CC CO CP

For individual or manifold assembly

Size: 10,5 mm


2

CONTROL



With outlets on the body


Mod. **E521-36**
E521-C36


With outlets on the body


Mod. **E521-33**
E521-C33


With outlets on the body


Mod. **E721-33**
E721-C33

Mod. **E621-33**
E621-C33

Mod. **E821-33**
E821-C33




With outlets on the body


Mod. **E521-16-10-K10**

With outlets on the body


Mod. **E521-11-10-K10**


With outlets on the body


Mod. **E721-11-10-K10**

Mod. **E621-11-10-K10**

Mod. **E821-11-10-K10**




Body for sub-base


Mod. **E520-36**
E520-C36


Body for sub-base


Mod. **E520-33**
E520-C33

Body for sub-base


Mod. **E720-33**
E720-C33

Mod. **E620-33**
E620-C33

Mod. **E820-33**
E820-C33



Body for sub-base


Mod. **E520-16-10-K10**

Body for sub-base


Mod. **E520-11-10-K10**

Body for sub-base


Mod. **E720-11-10-K10**

Mod. **E620-11-10-K10**

Mod. **E820-11-10-K10**

CODING EXAMPLE

E	5	2	1	-	11	-	10	-	K	1	3
---	---	---	---	---	----	---	----	---	---	---	---

E	SERIES
5	FUNCTION: 5 = 5/2 6 = 5/3 Centres Closed 7 = 5/3 Centres Open 8 = 5/3 Centres in Pressure
2	SIZE: 2 = 10,5 mm
1	BODY TYPE: 1 = body with threaded plate 0 = body for sub-base
11	ACTUATION: 11 = electro-pneumatic, bistable 16 = electro-pneumatic, monostable 33 = pneumatic bistable - tube ø 3 36 = pneumatic monostable - tube ø 3 C33 = pneumatic bistable - tube ø 4 C36 = pneumatic monostable - tube ø 4
10	INTERFACE: 10
K	TYPE OF SOLENOID: K
1	SOLENOID DIMENSION: 1 = 10x10
3	SOLENOID VOLTAGE: 1 = 6V DC 2 = 12V DC 3 = 24V DC

Sub-bases and manifolds



Mod. E521-10**
** = number of positions



Mod. E520-0101



Mod. E520-21**
E520-2C**
** = number of positions

CODING EXAMPLE

E5	2	1	-	1	0	02
----	---	---	---	---	---	----

E5	SERIES
2	SIZE: 2 = size 10,5
1	BODY TYPE: 0 = body for sub-base assembly 1 = body with threads or tube port
1	TYPE OF SUB-BASE: 0 = single sub-base with side outlets 1 = manifold for threaded valve 2 = manifold for body mounted valve
0	PORTS: 0 = for valves with outlets on the body 1 = threaded C = tube 4
02	N° OF POSITIONS: 01 = single 03, 04, 06, 08, 10, 12 = multiple

NOTE: When constructing manifolds with 10 or more stations, it is recommended, in order to reduce the risk of pressure drop within the assembly, that pressure is supplied to port 1 at each end of the block. The exhaust ports 3 and 5 at each end should also be utilized (size 10,5 and 16 mm). The same provision should be made for 5 station manifolds of the 19 mm valves. Manifolds complete with ports for external pilot supply are available on request.

Accessories

Mounting brackets for DIN rail
DIN EN 50022 (7,5 mm x 35 mm - width 1)
 Suitable for all manifolds
 Supplied with:
 2x plates
 2x screws M4x6 UNI 5931
 Mod. **PCF-E520**



Horizontal mounting foot bracket
for valves with outlets on the body
 The following is supplied:
 1x foot bracket, 2x screws
 Mod. **B1-E521**



Vertical mounting foot bracket for
valves with outlets on the body
(monostable valves only)
 The following is supplied:
 1x foot bracket, 2x screws
 Mod. **B2-E521**



Blanking plate for manifolds
 The following is supplied:
 1x blanking plate,
 2x screws, 1x seal
 Mod. **TP-E521** (valves with outlets on the body)
TP-E520 (valves mounted on sub-base)



Intermediate plate for valves to
provide a separate supply in 1
 Base mounted valves
 The following is supplied:
 1x plate, 2x screws,
 1x interface seal, 2x O-Ring
 Mod. **PCP-E521**



Intermediate plate for valves to
provide a separate supply in 1
 Base mounted valves
 The following is supplied:
 1x plate, 2x screws,
 1x interface seal, 2x O-Ring
 Mod. **PCP-E520**



Intermediate plate for valves to provide separate supply in 3 and 5
 The following is supplied:
 1x plate, 2x screws,
 1x interface seal, 2x O-Ring
 Mod. **PCS-E521** (valves with outlets on the body)
PCS-E520 (valves mounted on sub-base)




Series EN valves and solenoid valves


5/2-way, 5/3-way CC CO CP

With outlets on the body. For individual or manifold assembly

Size 16, 19 mm




Mod. **EN531-36**
EN551-36




Mod. **EN531-33**
EN551-33




Mod. **EN631-33**
EN651-33




Mod. **EN731-33**
EN751-33



Mod. **EN831-33**
EN851-33




Mod. **EN531-16-P***
EN551-16-P*
EN531-16-PN*
EN551-16-PN*
EN531-16-W*
EN551-16-W*



Mod. **EN531-16-P***
EN551-16-P*
EN531-E16-PN*
EN551-E16-PN*
EN531-E16-W*
EN551-E16-W*

* = choose the most suitable solenoid (see the coding example)




Mod. **EN531-11-P***
EN551-11-P*
EN531-11-PN*
EN551-11-PN*
EN531-11-W*
EN551-11-W*



Mod. **EN531-E11-P***
EN551-E11-P*
EN531-E11-PN*
EN551-E11-PN*
EN531-E11-W*
EN551-E11-W*


* = choose the most suitable solenoid (see the coding example)




Mod. **EN631-11-P***
EN651-11-P*



Mod. **EN731-11-P***
EN751-11-P*




Mod. **EN831-11-P***
EN851-11-P*



Mod. **EN631-E11-P***
EN651-E11-P*




Mod. **EN731-E11-P***
EN751-E11-P*




Mod. **EN831-E11-P***
EN851-E11-P*






* = choose the suitable solenoid (see the coding example)





Mod. **EN530-36**
EN550-36







Mod. **EN530-33**
EN550-33



* = choose the most suitable solenoid (see the coding example)



* = choose the most suitable solenoid (see the coding example)



* = choose the suitable solenoid (see the coding example)

CODING EXAMPLE

EN	5	3	1	-	11	-	PN3
----	---	---	---	---	----	---	-----

EN

SERIES

5

FUNCTION:

5 = 5/2
6 = 5/3 Centre Closed
7 = 5/3 Centre Open
8 = 5/3 Pressure Centre

3

SIZE:

3 = size 16
5 = size 19

1

BODY TYPE:

1 = body with threaded plate
0 = body for sub-base

11

ACTUATION:

11 = electro-pneumatic, bistable
16 = electro-pneumatic, monostable
33 = pneumatic bistable
36 = pneumatic monostable
E11 = electro-pneumatic, bistable with external servo-pilot supply
E16 = electro-pneumatic, monostable with external servo-pilot supply

PN3

TYPE OF SOLENOID:

PN3 = 24V DC - 1W
PN4 = 48V DC - 2W
PN6 = 110V DC - 2W
PN7 = 230V - 2W
P13 = 24V DC - 1W
P54 = 48V DC - 2W
P56 = 110V DC - 2W
W53 = 24V DC - 2W
W54 = 48V DC - 2W

In case of applications with alternate current, use a bridge rectifier connector

Manifolds

Manifolds for valves size 16 and 19
(outlets on the body valve)

Mod. EN531-1002	EN551-1002
EN531-1003	EN551-1003
EN531-1004	EN551-1004
EN531-1005	EN551-1005
EN531-1006	EN551-1006
EN531-1008	EN551-1008
EN531-1010	EN551-1010
EN531-1012	EN551-1012

Manifolds for valves size 16 and 19
(outlets on manifolds)

Mod. EN530-2102	EN550-2102
EN530-2103	EN550-2103
EN530-2104	EN550-2104
EN530-2105	EN550-2105
EN530-2106	EN550-2106
EN530-2108	EN550-2108
EN530-2110	EN550-2110
EN530-2112	EN550-2112



Accessories

Blanking plate for manifolds - valves with outlets on the body

The following is supplied:

- 1x blanking plate,
- 2x screws,
- 1x seal

Mod. **TP-EN531**
TP-EN551



Blanking plate for manifolds - base mounted valves

The following is supplied:

- 1x blanking plate,
- 2x screws,
- 1x seal

Mod. **TP-EN530**
TP-EN550



Mounting brackets for DIN rail DIN EN 50022 (7,5 mm x 35 mm - width 1)

Suitable for all manifolds.

Supplied with:

- 2x plates,
- 2x screws M4x6 UNI 5931
- 2x nuts

Mod. **PCF-EN531**



Connectors DIN 43650, pin spacing 9,4 mm

Mod. **125-601**

125-701

125-800



Connectors DIN 43650, pin spacing 9,4 mm with cable

The internal rectifier circuit of the connector Mod. 125-900 allows to use solenoid valves with different AC voltage, even if the voltage indicated on the solenoid valve is DC

Mod. **125-501-2** (cable 2000 mm)

125-550-1 (cable 1000 mm)

125-601-2 (cable 2000 mm)

125-571-3 (cable 3000 mm)

125-900 (cable 2000 mm)



Connectors DIN 43650 pin spacing 8 mm

To be used in all DC valves with voltages from 6 to 110 V

Mod. **126-550-1** (cable 1000 mm)

126-800

126-701



In-line connectors with moulded cable

Mod. **125-503-2** (cable 2000 mm)

125-503-5 (cable 5000 mm)

125-553-2 (cable 2000 mm)

125-553-5 (cable 5000 mm)



In-line connectors with moulded cable and bridge rectifier

Mod. **125-903-2** (cable 2000 mm)

125-903-5 (cable 5000 mm)






























Series 3 valves and solenoid valves



2x3/2-way, 3/2-way, 5/2-way, 5/3-way CC CO CP

Ports: G1/8, G1/4

2

CONTROL



	 Mod. 354-011-02  Mod. 354-E11-02		 Mod. 364-011-02  Mod. 374-011-02  Mod. 384-011-02  Mod. 384-E11-02
	 Mod. 338-035 338L-035 334-035		 Mod. 358-035 354-035
	 Mod. 358-033 354-033		 Mod. 368-033/364-033  Mod. 378-033/374-033  Mod. 388-033/384-033
	 Mod. 398-035/394D-035  Mod. 348D-035/344D-035  Mod. 398D-035/394D-035		

2

CONTROL

CODING EXAMPLE

3	3	8	D	-	015	-	02	-	U7	7	
---	---	---	---	---	-----	---	----	---	----	---	--

3

SERIES

3

NUMBER OF WAYS - POSITIONS:

3 = 3/2 NC - 4 = 3/2 NO - 5 = 5/2 - 6 = 5/3 CC - 7 = 5/3 CO - 8 = 5/3 CP - 9 = 1x3/2 NC + 1x3/2 NO

8

PORTS:

8 = G1/8 - 4 = G1/4

D

VERSION:

= standard

D = double valve 2x3/2

L = for manifold assembly (only for solenoid valves 3/2 with G1/8 ports)

015

ACTUATION:

011 = double solenoid - 015 = single solenoid, spring return - 016 = single solenoid, pneumatic spring return

E11 = double solenoid external servo-command - E15 = single solenoid, external servo-command - 033 = pneumatic pneumatic - 035 = pneumatic spring

02

SOLENOID INTERFACE:

02 = mech. sol. 22 x 22

U7

ENCAPSULATING MATERIAL / SOLENOID DIMENSIONS:

A8 = PPS / 30 x 30

G7 = PA / 22 x 22

G8 = PA / 30 x 30 (solo 24 V DC)

G9 = PA / 22 x 58

H8 = PA 6 V0 / 30 x 30

U7 = PET / 22 x 22

7

SOLENOID VOLTAGE:

		U7**	G7**	A8**	H8**	G9**
B	24V AC 50/60Hz	-	-	5VA	5,3VA	-
C	48V AC 50/60Hz	-	-	-	5,3VA	-
D	110V AC 50/60Hz	-	-	5VA	5,3VA	-
E	230V AC 50/60Hz	-	-	5VA	5,3VA	-
F	380V AC 50/60Hz	7VA	7VA	-	-	-
H	24V 50/60Hz	3,5VA	3,5VA	-	-	-
	12V DC	3,1W	3,1W	-	-	-
K	72V DC	4,8W	4,8W	-	-	-
	110V AC 50/60Hz	3,8VA	3,8VA	-	-	-
	125V AC 50/60Hz	5,5VA	5,5VA	-	-	-
K1*	72V DC	5,6W	5,6W	-	-	-
	110V AC 50/60Hz	5,8VA	5,8VA	-	-	-
	125V AC 50/60Hz	8,3VA	8,3VA	-	-	-
J	230V AC 50/60Hz	3,5VA	3,5VA	-	-	-
	240V AC 50/60Hz	4VA	4VA	-	-	-

		U7**	G7**	A8**	H8**	G9**
J	230V AC 50/60Hz	3,5VA	3,5VA	-	-	-
	240V AC 50/60Hz	4VA	4VA	-	-	-
1	6V DC	5,1W	5,1W	-	-	-
2	12V DC	5W	5W	-	-	-
3	24V DC	5W	5W	4W	5,4W	4/2W
4	48V DC	5,3W	5,3W	4W	-	-
6	110V DC	4,2W	4,2W	-	-	-
7	24V DC	3,1W	3,1W	-	-	-
	48V AC 50/60Hz	3,5VA	3,5VA	-	-	-
71*	24V DC	3,1W	3,1W	-	-	-
	48V AC 50/60Hz	3,5VA	3,5VA	-	-	-
9	48V DC	3,1W	3,1W	-	-	-
10	110V DC	3,2W	3,2W	-	-	-

* = Only for valve models NO in line

** = Substitute 0 with letter or number at the beginning of the line

TYPE OF MANUAL OVERRIDE:

= bistable, standard

IL = bistable, lever type (available on demand)


IM = monostable (available on demand)

Accessories

Manifold bars with separate exhausts (low version)

The following is supplied:
2x feet, 1x manifold,
1x inlet fitting, 1x plug,
4x washers

Mod. **CNV-318-2**
CNV-318-3
CNV-318-4
CNV-318-5
CNV-318-6



Manifold bars with separate exhausts (high version)

The following is supplied:
2x feet, 1x manifold,
1x inlet fitting, 1x plug,
4x washers

Mod. **CNV-328-2**
CNV-328-3
CNV-328-4
CNV-328-5
CNV-328-6



Initial / final Module with three positions

The following is supplied:

3x interface O-Rings manifold/manifold,
2x fixing nuts,
2x junction plugs,
9x interface seals valve/manifold (CNVL-3H3)
or 3x interface seals valve/manif. (CNVL-4H3),
6x fixing screws for valves

Mod. **CNVL-3H3**
CNVL-4H3



Initial / final Module with 2 positions

Initial module with 2 positions

The following is supplied:

3x interface O-Rings manifold/manifold,
2x fixing nuts,
2x junction plugs,
6x interface seals valve/manifold (CNVL-3H2)
or 2x interface seals valve/manif. (CNVL-4H2),
4x fixing screws for valves

Mod. **CNVL-3H2**
CNVL-4H2



Intermediate module with 3 positions

The following is supplied:

3x interface O-Rings manifold/manifold,
2x fixing nuts,
2x junction plugs,
9x interface seals valve/manifold (CNVL-3I3)
or 3x interface seals valve/manif. (CNVL-4I3),
6x fixing screws for valves

Mod. **CNVL-3I3**
CNVL-4I3



Intermediate module with 2 positions

The following is supplied:

3x interface O-Rings manifold/manifold;
2x fixing nuts,
2x junction plugs,
6x interface seals valve/manifold (CNVL-3I2)
or 2x interface seals valve/manif. (CNVL-4I2),
4x fixing screws for valves

Mod. **CNVL-3I2**
CNVL-4I2



Intermediate module with 1 position

The following is supplied:

3x interface O-Rings manifold/manifold,
2x fixing nuts,
2x junction plugs,
3x interface seals valve/manifold (CNVL-3I1)
or 1x interface seal valve/manif. (CNVL-4I1),
2x fixing screws for valves

Mod. **CNVL-3I1**
CNVL-4I1



Terminal module

The following is supplied:

2x fixing nuts

Mod. **CNVL-3H**
CNVL-4H



Interface module manifold between Series 3 G1/8 and G1/4

The following is supplied:

3x interface seal,
2x screws,
2x pins,
4x plugs,
6x O-Rings

Mod. **CNVL-4H-3H**



Intermediate plate for additional inlet and exhaust pressure

The following is supplied:

3x O-Rings,
2x fixing screws

Mod. **CNVL-3H**
CNVL-4H



Separation diaphragm

For separation of channel: 1 - 3 - 5.

The following is supplied:

1x diaphragm

Mod. **CNVL-3H-TP** for Series 3, G1/8
CNVL-4H-TP for Series 3, G1/4



Blanking plug for TCNVL manifolds

The following is supplied:

1x blanking plug,
1x O-Ring

Mod. **TCNVL/3** for Series 3, G1/8
TCNVL/5 for Series 3, G1/4



Blanking plate

Accessory for Series CNVL manifolds

The following is supplied:

2x fixing screws,
3x O-Rings


Mod. **CNVL/1**
CNVL/4




Series 4 valves and solenoid valves

3/2-way, 5/2-way, 5/3-way CC CO CP


Ports: G1/8, G1/4, G1/2




Mod. 438-015-22




Mod. 438-016-22




Mod. 448-015-22




Mod. 448-016-22




Mod. 438-011-22




Mod. 458-015-22



Mod. 458-016-22




Mod. 458-011-22




Mod. 468-011-22




Mod. 478-011-22




Mod. 434-015-22




Mod. 434-016-22



Mod. 444-015-22




Mod. 444-016-22




Mod. 434-011-22










Mod. 454-015-22




Mod. 454-016-22




















Mod. 454-011-22




* = choose the most suitable solenoid
(see the coding example)




* = choose the most suitable solenoid
(see the coding example)







Mod. 454-33




Mod. 454-34




Mod. 468-33




Mod. 474-33



Mod. 474-33




Mod. 452C-35




Mod. 452C-33



Mod. 452C-34



Mod. 452N-35



Mod. 452N-33

2

CONTROL

CODING EXAMPLE

4	5	4	-	015	-	22	-	U7	7	
---	---	---	---	-----	---	----	---	----	---	--

4

SERIES

5

NUMBER OF WAYS - POSITIONS:

3 = 3/2 NC
 4 = 3/2 NO
 5 = 5/2
 6 = 5/3 CC
 7 = 5/3 CO

4

PORTS:

8 = G1/8 - 4 = G1/4 - 2C = G1/2 - 2N = G1/2 (high flow)

015

ACTUATION:

011 = double solenoid (horizontal solenoids)
 V11 = double solenoid (vertical solenoids) for G1/4 port only
 E11 = double solenoid external servo-command
 E15 = single solenoid external servo-command
 015 = single solenoid, spring return (horizontal solenoids)
 V15 = single solenoid, spring return (vertical solenoid) for G1/4 port only
 016 = single solenoid, pneumatic spring return (horizontal solenoid)
 V16 = single solenoid, pneumatic spring return (vertical solenoid) for G1/4 port only
 33 = pneumatic pneumatic
 34 = pneumatic differential
 35 = pneumatic spring

22

SOLENOID INTERFACE::

22 = mech. sol. 22 x 22
 50 = mech. sol. 32 x 32 (G1/2 only)

U7

SOLENOID MATERIAL / DIMENSIONS:

A6 = PPS / 32 x 32 (G1/2 only)
 A8 = PPS / 30 x 30
 G7 = PA / 22 x 22
 G8 = PA / 30 x 30 (24 V DC only)
 G9 = PA / 22 x 58
 H8 = PA 6 V0 / 30 x 30
 U7 = PET / 22 x 22

7

SOLENOID VOLTAGE:

	U7**	G7**	A8**	H8**	G9**
B	24V AC 50/60Hz	-	-	5VA	5,3VA
C	48V AC 50/60Hz	-	-	-	5,3VA
D	110V AC 50/60Hz	-	-	5VA	5,3VA
E	230V AC 50/60Hz	-	-	5VA	5,3VA
F	380V AC 50/60Hz	7VA	7VA	-	-
H	24V 50/60Hz	3,5VA	3,5VA	-	-
	12V DC	3,1W	3,1W	-	-
K	72V DC	4,8W	4,8W	-	-
	110V AC 50/60Hz	3,8VA	3,8VA	-	-
	125V AC 50/60Hz	5,5VA	5,5VA	-	-
K1*	72V DC	5,6W	5,6W	-	-
	110V AC 50/60Hz	5,8VA	5,8VA	-	-
	125V AC 50/60Hz	8,3VA	8,3VA	-	-
J	230V AC 50/60Hz	3,5VA	3,5VA	-	-
	240V AC 50/60Hz	4VA	4VA	-	-

	U7**	G7**	A8**	H8**	G9**
1	6V DC	5,1W	5,1W	-	-
2	12V DC	5W	5W	-	-
3	24V DC	5W	5W	4W	5,4W
4	48V DC	5,3W	5,3W	4W	-
6	110V DC	4,2W	4,2W	-	-
7	24V DC	3,1W	3,1W	-	-
	48V AC 50/60Hz	3,5VA	3,5VA	-	-
71*	24V DC	3,1W	3,1W	-	-
	48V AC 50/60Hz	3,5VA	3,5VA	-	-
9	48V DC	3,1W	3,1W	-	-
10	110V DC	3,2W	3,2W	-	-

* = only for valve models NO in line

** = substitute 0 with letter or number at the beginning of the line

TYPE OF MANUAL OVERRIDE:

= bistable, standard
 IL = bistable, lever type (available on demand)
 IM = monostable (available on demand)

Accessories

Manifold base with common exhausts

For valves Series 4, G1/8 (3/2, 5/2 or 5/3-way)

The following is supplied with:

- 1x manifold,
- 1x pair of fixing screws for valve position,
- 1x interface seal for valve positions,
- 2x guides for valve position

Mod. **CNVL-42**

CNVL-43

CNVL-44

CNVL-45

CNVL-46



Manifold base with common exhausts

For valves Series 4, G1/4 (3/2, 5/2 or 5/3-way)

The following is supplied:

- 1x manifold,
- 1x pair of fixing screws for valve position,
- 1x interface seal for valve positions,
- 2x guides for valve position

Mod. **CNVL-52**

CNVL-53

CNVL-54

CNVL-55

CNVL-56



Blanking plate

The following is supplied:

- 2x fixing screws,
- 3x O-Rings

Mod. **CNVL/2** for Series 4, G1/8

CNVL/3 for Series 4, G1/8



Blanking plug

Accessory for Series CNVL manifolds

The following is supplied:

- 1x blanking plug,
- 1x O-Ring

Mod. **TCNVL/3** for Series 4, G1/8

TCNVL/5 for Series 4, G1/8



Series 9 valves and solenoid valves

5/2-way, 5/3-way CC CO

Ports: G1/4 (size 1), G3/8 (size 2), G1/2 (size 3)

According to the standard ISO 5599/1



* = size ISO



Mod. 95*-000-P15-23



Mod. 95*-000-P16-23




* = size ISO



Mod. 95*-000-P11-23




Mod. 96*-000-P11-23




Mod. 97*-000-P11-23



* = size ISO



Mod. 95*-000-33



Mod. 95*-000-34



Mod. 95*-000-35



* = size ISO



Mod. 96*-000-33



Mod. 97*-000-33

2

CONTROL

CODING EXAMPLE

9	5	1	-	000	-	P16	-	23	-	U7	7
---	---	---	---	-----	---	-----	---	----	---	----	---

9

SERIES

5

NUMBER OF WAYS - POSITIONS:
5 = 5/2
6 = 5/3 CC
7 = 5/3 CO

1

SIZE:
1 = size 1
2 = size 2
3 = size 3

000

BODY DESIGN:
000 = valve body

P 16

ACTUATION:
33 = pneumatic, pneumatic return - 34 = pneumatic, differential pneumatic return
35 = pneumatic, mechanical spring return - P11 = double solenoid (horizontal solenoids)
P15 = single solenoid, spring return (horizontal solenoids) - P16 = solenoid, pneumatic spring return (horizontal solenoids)

23

SOLENOID INTERFACE:
23 = A531 - BC2 Cnomo norm

U7

SOLENOID MATERIAL / SOLENOID DIMENSIONS:
A8 = PPS / 30 x 30
G7 = PA / 22 x 22
G8 = PA / 30 x 30 (24 V DC only)
G9 = PA / 22 x 58
H8 = PA 6 V0 / 30 x 30
U7 = PET / 22 x 22

7

SOLENOID VOLTAGE:

		U7**	G7**	A8**	H8**	G9**		U7**	G7**	A8**	H8**	G9**
B	24V AC 50/60Hz	-	-	5VA	5,3VA	-	1	6V DC	5,1W	5,1W	-	-
C	48V AC 50/60Hz	-	-	-	5,3VA	-	2	12V DC	5W	5W	-	-
D	110V AC 50/60Hz	-	-	5VA	5,3VA	-	3	24V DC	5W	5W	4W	5,4W
E	230V AC 50/60Hz	-	-	5VA	5,3VA	-	4	48V DC	5,3W	5,3W	4W	-
F	380V AC 50/60Hz	7VA	7VA	-	-	-	6	110V DC	4,2W	4,2W	-	-
H	24V 50/60Hz	3,5VA	3,5VA	-	-	-	7	24V DC	3,1W	3,1W	-	-
K	12V DC	3,1W	3,1W	-	-	-	71*	48V AC 50/60Hz	3,5VA	3,5VA	-	-
K	72V DC	4,8W	4,8W	-	-	-		24V DC	3,1W	3,1W	-	-
K	110V AC 50/60Hz	3,8VA	3,8VA	-	-	-		48V AC 50/60Hz	3,5VA	3,5VA	-	-
K	125V AC 50/60Hz	5,5VA	5,5VA	-	-	-	9	48V DC	3,1W	3,1W	-	-
K1*	72V DC	5,6W	5,6W	-	-	-	10	110V DC	3,2W	3,2W	-	-
K1*	110V AC 50/60Hz	5,8VA	5,8VA	-	-	-						
K1*	125V AC 50/60Hz	8,3VA	8,3VA	-	-	-						
J	230V AC 50/60Hz	3,5VA	3,5VA	-	-	-						
J	240V AC 50/60Hz	4VA	4VA	-	-	-						
-												

* = Only for valve models NO in line

** = Substitute 0 with letter or number at the beginning of the line

* = Only for valve models NO in line

** = Substitute 0 with letter or number at the beginning of the line

Accessories

Single sub-base side outlets (VDMA 24345)

Mod. 901-F1A
902-F2A
903-F3A



Single sub-base with rear outlets (VDMA 24345)

Mod. 901-G1A
902-G2A
903-G3A



Manifold sub-base with com. exhausts and inlet (VDMA 24345)

The following is supplied:
2x fixing screws,
3x O-ring
Mod. 901-C1A
902-C2A
903-C3A



End block for manifold sub-base (VDMA 24345)

The following is supplied:
2x end blocks (1 pair),
2x fixing screws,
3x OR
Mod. 901-H1
902-H2
903-H3



Interface with front outlets (VDMA 24345)

The following is supplied:
2x fixing screws,
2x OR
Mod. 901-N1
902-N2
903-N3



End blocks for manifold bases with front outlets

The following is supplied:
2x end blocks (1 pair),
2x fixing screws,
3x OR
Mod. 901-HN1



Manifold bases with common inlet and exhaust ports and front outlet

The following is supplied:
2x fixing screws,
3x OR
Mod. 901-N1A



Mounting example

Separation tap lines 1 - 3 - 5
to be used with manifold
type 901C and 902C
Mod. 901-C1A/TP
902-C2A/TP



Separation joint

To be used with manifold type 901N
P-R-S plugged
Mod. 901-N1A/T



Separation joint



















To be used with manifold type 901N
P plugged
Mod. 901-N1A/TP



Series 7 valves and solenoid valves

VDMA 24563 (ISO 15407-1)
5/2-way, 5/3-way CC CO CP



 <p>* = size ISO</p> <p>Mod. 75*-000-P16-15-W20</p> 	 <p>* = size ISO</p> <p>Mod. 75*-000-P11-15-W20</p> 	 <p>* = size ISO</p> <p>Mod. 76*-000-P11-15-W20</p> 
 <p>* = size ISO</p> <p>Mod. 75*-000-P16-15-W20</p> 	 <p>* = size ISO</p> <p>Mod. 75*-000-P11-15-W20</p> 	 <p>* = size ISO</p> <p>Mod. 76*-000-P11-15-W20</p> 
 <p>* = size ISO</p> <p>Mod. 75*-000-P16-15-W20</p> 	 <p>* = size ISO</p> <p>Mod. 75*-000-P11-15-W20</p> 	 <p>* = size ISO</p> <p>Mod. 76*-000-P11-15-W20</p> 

2

CONTROL

CODING EXAMPLE

7	5	1	-	N	1	A	-	P16	-	15	-	W	2	3
---	---	---	---	---	---	---	---	-----	---	----	---	---	---	---

7	SERIES:
5	NUMBER OF WAYS - POSITIONS: 5 = 5/2 - 6 = 5/3 CC - 7 = 5/3 CO - 8 = 5/3 CP
1	SIZES: 1 = size 26 mm - 2 = size 18 mm
N	SUBBASE: N = sub-base with front outlets
1	PORTS: 1 = G1/4 (Size 26 mm) - 2 = G1/8 (Size 18 mm)
A	NUMBER OF SUBBASES: A = 1 * B = 2 * C = 3 * D = 4 * E = 5 * F = 6 * G = 7 * H = 8 * K = 9 * L = 10 * M = 11 * N = 12 * P = 13 * R = 14 * S = 15 *
P16	ACTUATION: 33 = pneumatic, bistable - 36 = pneumatic, monostable - P11 = electro-pneumatic, bistable - P16 = electro-pneumatic, monostable
15	SOLENOID INTERFACE: 15 = 15x15
W	SOLENOID TYPES: W = Series W (24V - 48V DC only) - P = Series P *
2	CONNECTION: 1 = wire 300 mm (Series W, only 24V DC) ** - 2 = 2 pins (Series W 24V - 48V DC/AC) - 5 = 2 pins+earth (Series P) **
3	SOLENOID VOLTAGE: 3 = 24V DC - 4 = 48V DC ** - 6 = 110V DC (with Series P solenoid only) ** - B = 24V 50/60 Hz (with Series P solenoid only) ** C = 48V 50/60 Hz (with Series P solenoid only) ** - D = 110V 50/60 Hz (with Series P solenoid only) **

NOTE:

* complete with the two end blocks

** on request

Accessories

End blocks for subbase

with conveyed inlets and exhausts and front outlets

The following is supplied:

1x seal,

2x fixing screws

Mod. **701C-HN1**

702C-HN2



Intermediate supply module for manifold bases

with conveyed inlets and exhausts and front outlets

The following is supplied:

1x seal,

2x fixing screws

Mod. **701C-N1N**

702C-N2N



Manifold subbase

with conveyed inlets and exhausts and front outlets

The following is supplied:

1x seal,

2x fixing screws

Mod. **701C-N1A** for separate pilots

702C-N2A for separate pilots

701C-N1C

702C-N2C



Diaphragm for subbase

with conveyed inlet and exhausts and side outlets

Mod. **701C-N1A-TP**

702C-N2A-TP



Excluder tap for subbase

The following is supplied:

1x seal,

2x screws

Mod. **701-TP**

702-TP



Interface between ISO 01 and ISO 02

The following is supplied:

1x tap S2610 3/8,

5x OR,

2x screws








Mod. **701C-702C-A**



Series NA valves and solenoid valves

3/2, 5/2, 5/3 CC CO CP

With holes configured according NAMUR standards



* = choose the suitable solenoid (see the coding example)

2

CONTROL

CODING EXAMPLE

NA	5	4N	-	15	-	02	-	U7	7
----	---	----	---	----	---	----	---	----	---

NA SERIES
NAMUR

5 NUMBER OF WAYS - POSITIONS:
3 = 3/2 NC
4 = 3/2 NO
5 = 5/2
6 = 5/3 CC
7 = 5/3 CO
8 = 5/3 CP

4N PORTS:
4N = G1/4 supply
ports according NAMUR standards

15 ACTUATION:
11 = double solenoid
15 = single solenoid, spring return
33 = pneumatic pneumatic
35 = pneumatic, spring

02 SOLENOID INTERFACE:
02 = mech. sol. 22 x 22

U SOLENOID MATERIAL / SOLENOID DIMENSIONS:
A8 = PPS / 30 x 30
G7 = PA / 22 x 22
G8 = PA / 30 x 30 (24 V DC only)
G9 = PA / 22 x 58
H8 = Self-extinguishing PA, Explosion-proof (30 x 30)
U7 = PET / 22 x 22

7	SOLENOID VOLTAGE:	U7**	G7**	A8**	H8**	G9**
B	24V AC 50/60Hz	-	-	5VA	5,3VA	-
C	48V AC 50/60Hz	-	-	-	5,3VA	-
D	110V AC 50/60Hz	-	-	5VA	5,3VA	-
E	230V AC 50/60Hz	-	-	5VA	5,3VA	-
F	380V AC 50/60Hz	7VA	7VA	-	-	-
H	24V 50/60Hz	3,5VA	3,5VA	-	-	-
	12V DC	3,1W	3,1W	-	-	-
K	72V DC	4,8W	4,8W	-	-	-
	110V AC 50/60Hz	3,8VA	3,8VA	-	-	-
	125V AC 50/60Hz	5,5VA	5,5VA	-	-	-
K1*	72V DC	5,6W	5,6W	-	-	-
	110V AC 50/60Hz	5,8VA	5,8VA	-	-	-
	125V AC 50/60Hz	8,3VA	8,3VA	-	-	-
J	230V AC 50/60Hz	3,5VA	3,5VA	-	-	-
	240V AC 50/60Hz	4VA	4VA	-	-	-
1	6V DC	5,1W	5,1W	-	-	-
2	12V DC	5W	5W	-	-	-
3	24V DC	5W	5W	4W	5,4W	4/2W
4	48V DC	5,3W	5,3W	4W	-	-
6	110V DC	4,2W	4,2W	-	-	-
7	24V DC	3,1W	3,1W	-	-	-
	48V AC 50/60 Hz	3,5VA	3,5VA	-	-	-
71*	24V DC	3,1W	3,1W	-	-	-
	48V AC 50/60Hz	3,5VA	3,5VA	-	-	-
9	48V DC	3,1W	3,1W	-	-	-
10	110V DC	3,2W	3,2W	-	-	-

* = Only for valve models NO in line

** = Substitute 0 with letter or number at the beginning of the line

Solenoids U7*, U7*EX, G7*, A8*, G93, B*, H8* and GP*

Version A and B

Connection according to DIN 43650 and DIN 40050 standards

For further details see the Solenoids section (2.2.35) on the Camozzi's catalogue



VOLTAGES

Mod.		
U7H	24V - 50/60 Hz	3.5 VA
	12V DC	3.1 W
U7K/ U7K1	72V DC	5.6 W
	110V - 50/60Hz	5.8 VA
	125V - 50/60Hz	8.3 VA
U7J	230V - 50/60Hz	3.5 VA
	240V - 50/60Hz	4 VA
U79	48V DC	3.1 W
U710	110V DC	3.2 W
U77/ U771	24V DC	3.1 W
	48V - 50/60Hz	3.5 VA
U7F	380V - 50/60Hz	7 VA
U72	12V DC	5 W
U73	24V DC	5 W



VOLTAGES

Mod.		
G7H	24V - 50/60 Hz	3.5 VA
	12V DC	3.1 W
G7K/ G7K1	72V DC	5.6 W
	110V - 50/60Hz	5.8 VA
	125V - 50/60Hz	8.3 VA
G7J	230V - 50/60Hz	3.5 VA
	240V - 50/60Hz	4 VA
G79	48V DC	3.1 W
G710	110V DC	3.2 W
G77/ G771	24V DC	3.1 W
	48V - 50/60Hz	3.5 VA
G72	12V DC	5 W
G73	24V DC	5 W



VOLTAGES

Mod.		
A8B	24V - 50/60Hz	5 VA
A8D	110V - 50/60Hz	5 VA
A8E	220V - 50/60Hz	5 VA
A83	24V DC	4 W



VOLTAGES

Mod.		
G93	24 V DC	4,2 W



VOLTAGES

Mod.		
B7B	24 V - 50/60 Hz	9 VA
B7D	110 V - 50/60 Hz	9 VA
B7E	230 V - 50/60 Hz	9 VA
B72	12 V - DC	10 W
B73	24 V - DC	10 W
B8B/B8BK	24 V - 50 Hz	15 VA
B8D/B8DK	110 V - 50/60 Hz	15 VA
B8E/B8EK	230 V - 50/60 Hz	15 VA
B82/B82K	12 V - DC	19 W
B83/B83K	24 V - DC	19 W
B9B	24 V - 50 Hz	29 VA
B9D	110 V - 50/60 Hz	29 VA
B9E	230 V - 50 Hz	29 VA
B93	24 V - DC	30 W



VOLTAGES

Mod.		
GPH	12 V DC	3 W
GP7	24 V DC	3 W

Solenoid Mod. H8.. for potentially explosive ambients (ATEX)



VOLTAGES

Mod.		
H83	24 V - DC	5,4 W
H8B	24 V - 50/60 Hz	5,3 VA
H8C	48 V - 50/60 Hz	5,3 VA
H8D	110 V - 50/60 Hz	5,3 VA
H8E	230 V - 50/60 Hz	5,3 VA

In potentially explosive ambients

it is necessary to use
a distance plate between
the valve and the actuator.

For valves Series NA use mod. **NA54-PC**



Connectors

Connectors DIN 43650 for solenoids Mod. U7/U7*EX, G7 and B7

Mod. **122-601**
122-701
122-702
122-703
122-800
122-800EX *

* only for ATEX certified solenoids mod. U7*EX, with
anti-screwing off screw mod. TORX



Connectors DIN 43650 with moulded cable
for solenoids Mod. U7/U7*EX, G7 and B7

Mod. **122-550-1** (cable 1000 mm)
122-550-5 (cable 5000 mm)
122-571-3 (cable 3000 mm)



Pre-wired connectors for solenoids Mod. G9

Mod. **122-892C** (cable 2000 mm)
122-893C (cable 2000 mm)



Connectors DIN 43650 for solenoids Mod. A8 and Mod. B8/B9

Mod. **124-800**
124-702
124-701
124-703




Series 3 Plug-In valve islands, Multipole and Fieldbus

New versions

Plug-In system for Series 3 solenoid valves, G1/8 port.

Valve functions: 2x3/2, 5/2 and 5/3-way CO CC CP. Multipole with a 25-pin Sub-D connector

It can interface with all major serial communication protocols

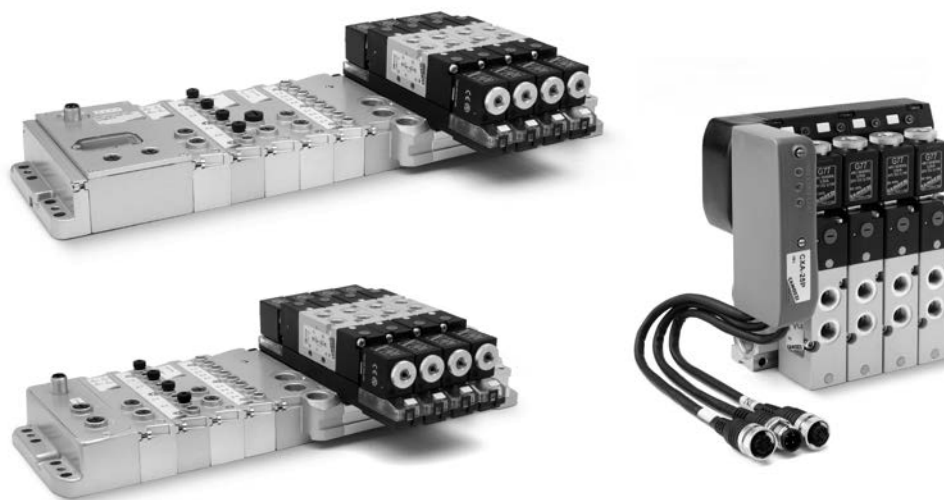

The Multipole version of Series 3 Plug-In valve island can be easily installed thanks to the front position of the Sub-D connector.

The accessories of the new connection system to the Series CX serial nets enable to handle up a multipole valve island by means of a Sub-D connector or through a node integrated in the island.

The modularity of the electric and pneumatic parts allows to install up to a maximum of 22 solenoids on 22 valve positions.

The electric and pneumatic modules have 2- and 3-position modularity. To optimize the signals distribution, electric modules are available for monostable and bistable valves. The pneumatic modularity enables the creation of zones with differentiated pressure.

Manuals, instruction sheets and configuration files are available on the site <http://catalogue.camozzi.com> or by means of the QR code indicated on the label of the product.

GENERAL DATA

PNEUMATIC SECTION

Valve construction	spool type with seals
Valve functions	5/2 - 5/3 CC - 5/3 CO - 5/3 CP - 2x3/2 NO - 2x3/2 NC - 1 3/2 NO + 1 3/2 NC
Materials	AL body, stainless steel spool, NBR seals, technopolymer
Mounting	through-out holes in the manifold
Ports	valve = G1/8 - manifold = G3/8
Installation	in any position
Operating temperature	from 0°C to 60°C (with dry air at -20°C)
Nominal flow rate	Qn 700 Nl/min
Nominal diameter	7 mm
Fluid	Filtered air, class 7.4.4 according to ISO 8573-1-2010, without lubrication. If lubricated air is used, it is recommended to use ISO VG32 oil, and to never interrupt the lubrication.

ELECTRICAL SECTION - MULTIPOLE VERSION

Max absorption	3 A
Type of connection	Multipole 25-pin male Sub-D
Supply voltage	24 V DC +/- 10%
Max number of solenoids	22 on 22 valve positions
Signalling	yellow LED
Duty cycle	ED 100%
Protection class	IP65

ELECTRICAL SECTION - FIELDBUS VERSION

General characteristics	see the section about the Series CX multi-serial module on page 106
Max absorption	digital outputs/analogic inputs and outputs 3A digital/analogic inputs 3 A
Voltage tolerances	logic supply 24 V DC +/- 10% power supply 24 V DC +/- 10%

CODING EXAMPLE - MULTIPOLE VERSION

3	P	8	-	03A	-	BDACAC	-	2BC3MU2BMXU2B2M	-	G77
---	---	---	---	-----	---	--------	---	-----------------	---	-----

3	SERIES
P	TYPE: P = Plug-In
8	SIZE: 8 = 1/8
03A	CONNECTION: 000 = no connector/cable CONNECTOR WITH CABLE AXIAL OUTPUT: 03A = 3 m 05A = 5 m 10A = 10 m 15A = 15 m 20A = 20 m 25A = 25 m CONNECTOR WITH CABLE RADIAL OUTPUT: 03R = 3 m 05R = 5 m 10R = 10 m 15R = 15 m 20R = 20 m 25R = 25 m CONNECTOR WITHOUT CABLE: 4XA = 25-pin axial 4XR = 25-pin radial
BDACAC	CONFIGURATION OF SUBBASE: A = 2 positions with bistable board B = 3 positions with bistable board C = 2 positions with monostable board D = 3 positions with monostable board
2BC3MU2BMXU2B2M	VALVE FUNCTION: E = empty position M = 5/2 Monostable, internal servo-pilot supply B = 5/2 Bistable, internal servo-pilot supply C = 2 x 3/2 NC, internal servo-pilot supply A = 2 x 3/2 NO, internal servo-pilot supply G = 1 x 3/2 NC + 1 x 3/2 NO, internal servo-pilot supply H = 5/3 Closed Centres, internal servo-pilot supply K = 5/3 Exhaust Centres, internal servo-pilot supply N = 5/3 Pressure Centres, internal servo-pilot supply D = 5/2 Monostable, external servo-pilot supply Y = 5/2 Bistable, external servo-pilot supply Q = 2 x 3/2 NC, external servo-pilot supply R = 2 x 3/2 NO, external servo-pilot supply S = 1 x 3/2 NC + 1 x 3/2 NO, external servo-pilot supply V = 5/3 Closed Centres, external servo-pilot supply Z = 5/3 Exhaust Centres, external servo-pilot supply W = 5/3 Pressure Centres, external servo-pilot supply L = plate with closed free position X = supply plate and supplementary exhausts T = diaphragm on channels 1, 3, 5 U = diaphragm in supply 1 J = diaphragm exhausts 3 and 5
G77	SOLENOID MATERIAL: G = PA U = PET

3P8-03R-ADCB-2B3MT2M3V-G77: valve island with 10 positions, radial connector and 3-meter cable.

Bases: the first with 2 bistables positions, the second with 3 monostable pos., the third with 2 monostable pos., the fourth with 3 bistable pos.


Valves: 2 bistable, 3 monostables, diaphragm on channels 1,3,5, 2 monostables, 3 Closed Centres, 24 V Solenoids.

CODING EXAMPLE - FIELDBUS VERSION

3	S	8	-	01	-	2AQRS	-	BDACAC	-	2BC3MU2BMXU2B2M	-	G77
---	---	---	---	----	---	-------	---	--------	---	-----------------	---	-----

3	SERIES
S	CONNECTION: S = Fieldbus
8	SIZE: 8 = 1/8
01	PROTOCOL: 01 = PROFIBUS-DP 02 = DeviceNet 03 = CANopen 04 = EtherNet/IP 05 = EtherCAT 06 = PROFINET 99 = Expansion Module
2AQRS	INPUT / OUTPUT MODULES: 0 = no module A = 8 digital inputs M8 B = 4 digital inputs M8 C = 2 analog inputs 4-20 mA D = 2 analog inputs 0-10 V E = 1 analog input 4-20 mA + 1 input 0-10 V Q = 4 M12 duo digital outputs R = 2 analog outputs 4-20 mA T = 2 analog outputs 0-10 V U = 1 analog output 4-20 mA + 1 output 0-10 V V = 1 analog output 4-20 mA + 1 input 0-10 V Z = 1 analog output 4-20 mA + 1 input 4-20 mA K = 1 analog output 0-10 V + 1 input 0-10 V Y = 1 analog output 0-10 V + 1 input 4-20 mA S = Initial subnet module
BDACAC	CONFIGURATION OF SUBBASE: A = 2 positions with bistable board B = 3 positions with bistable board C = 2 positions with monostable board D = 3 positions with monostable board
2BC3MU2BMXU2B2M	VALVE FUNCTION: E = empty position M = 5/2 Monostable, internal servo-pilot supply B = 5/2 Bistable, internal servo-pilot supply C = 2 x 3/2 NC, internal servo-pilot supply A = 2 x 3/2 NO, internal servo-pilot supply G = 1 x 3/2 NC + 1 x 3/2 NO, internal servo-pilot supply H = 5/3 Closed Centres, internal servo-pilot supply K = 5/3 Exhaust Centres, internal servo-pilot supply N = 5/3 Pressure Centres, internal servo-pilot supply D = 5/2 Monostable, external servo-pilot supply Y = 5/2 Bistable, external servo-pilot supply Q = 2 x 3/2 NC, external servo-pilot supply R = 2 x 3/2 NO, external servo-pilot supply S = 1 x 3/2 NC + 1 x 3/2 NO, external servo-pilot supply V = 5/3 Closed Centres, external servo-pilot supply Z = 5/3 Exhaust Centres, external servo-pilot supply W = 5/3 Pressure Centres, external servo-pilot supply L = plate with closed free position X = supply plate and supplementary exhausts T = diaphragm on channels 1, 3, 5 U = diaphragm in supply 1 J = diaphragm exhausts 3 and 5
G77	SOLENOID MATERIAL: G = PA U = PET

FUNCTIONS OF SOLENOID VALVES SERIES 3

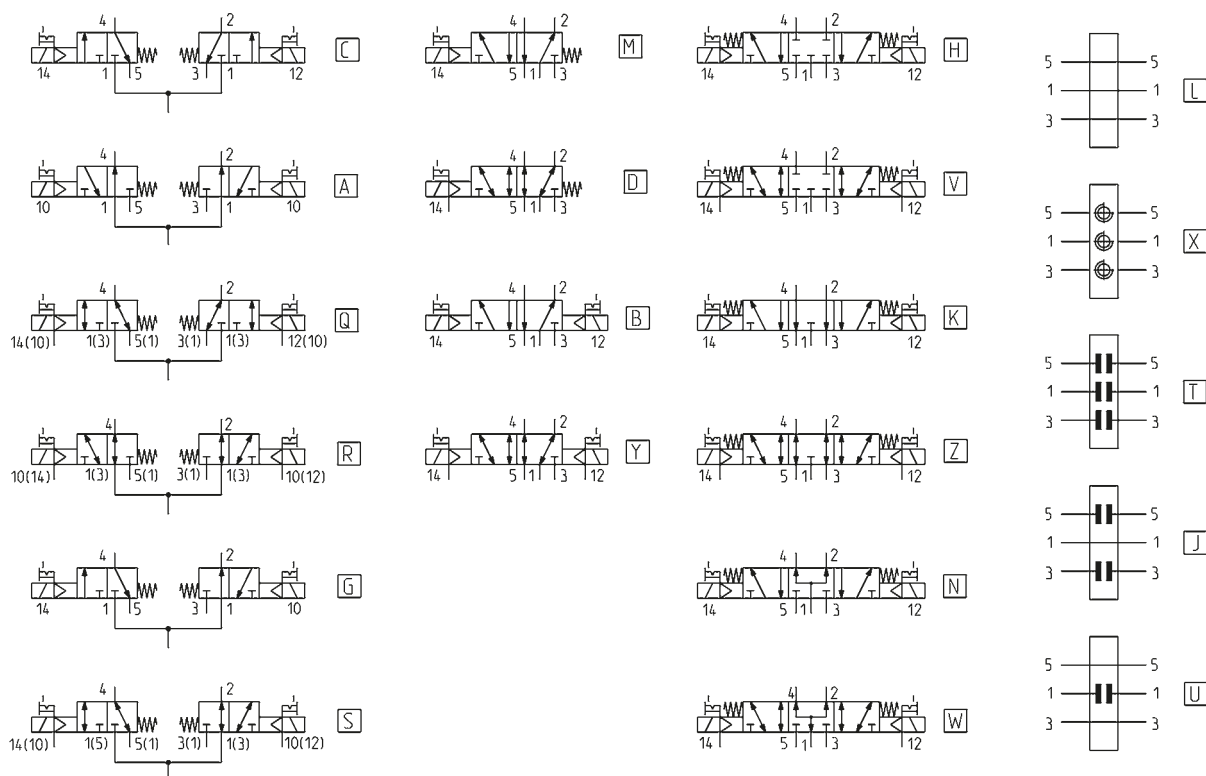

Mod.	Function	Actuation/return	Servo-pilot	Working pressure (bar)	Pilot pressure (bar)	Code
338D-015-02	2 x 3/2 NC	solenoid/spring	internal	2,5 ÷ 10	-	C
348D-015-02	2 x 3/2 NO	solenoid/spring	internal	2,5 ÷ 10	-	A
398D-015-02	1 x 3/2 NC + 1 x 3/2 NO	solenoid/spring	internal	2,5 ÷ 10	-	G
358-015-02	5/2 monostable	solenoid/spring	internal	2,5 ÷ 10	-	M
358-011-02	5/2 bistable	solenoid/solenoid	internal	1,5 ÷ 10	-	B
368-011-02	5/3 CC	solenoid/solenoid	internal	2 ÷ 10	-	H
378-011-02	5/3 CO	solenoid/solenoid	internal	2 ÷ 10	-	K
388-011-02	5/3 CP	solenoid/solenoid	internal	2 ÷ 10	-	N
338D-E15-02	2 x 3/2 NC	solenoid/spring	external	-0,9 ÷ 10	2,5 ÷ 10	Q
348D-E15-02	2 x 3/2 NO	solenoid/spring	external	-0,9 ÷ 10	2,5 ÷ 10	R
398D-E15-02	1 x 3/2 NC + 1 x 3/2 NO	solenoid/spring	external	-0,9 ÷ 10	2,5 ÷ 10	S
358-E15-02	5/2 monostable	solenoid/spring	external	-0,9 ÷ 10	2,5 ÷ 10	D
358-E11-02	5/2 bistable	solenoid/solenoid	external	-0,9 ÷ 10	1,5 ÷ 10	Y
368-E11-02	5/3 CC	solenoid/solenoid	external	-0,9 ÷ 10	2 ÷ 10	V
378-E11-02	5/3 CO	solenoid/solenoid	external	-0,9 ÷ 10	2 ÷ 10	Z
388-E11-02	5/3 CP	solenoid/solenoid	external	-0,9 ÷ 10	2 ÷ 10	W
CNVL/1L	free position (electrical and pneumatic cover)	-	-	-	-	L
CNVL-3P1	plate for supply and outlets	-	-	-	-	X
CNVL-3H-TP (x1)	diaphragm for supply (1)	-	-	-	-	U
CNVL-3H-TP (x2)	diaphragm for outlets (3-5)	-	-	-	-	J
CNVL-3H-TP (x3)	diaphragm for supply (1) and outlets (3-5)	-	-	-	-	T


Series F valve islands, Multipole and Fieldbus

New version

Multipole integrated electrical connection (PNP)

Valve functions: 2x2/2, 2x3/2, 5/2, 5/3 CC

It can interface with all major serial communication protocols

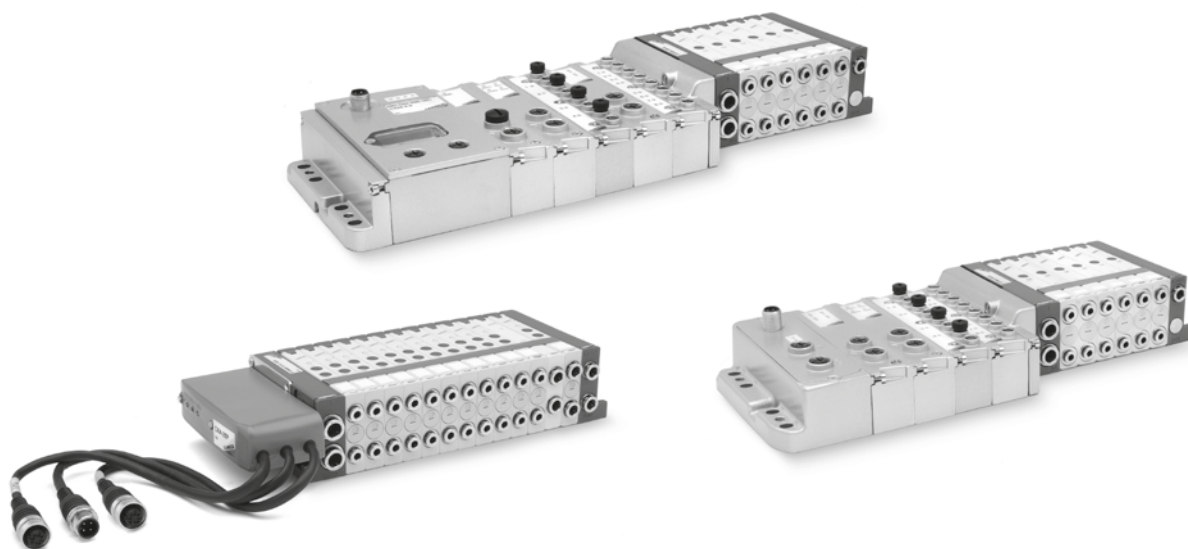

The Multipole version of Series F valve island can be easily integrated with the accessories of the new Series CX multiserial module, thus connecting to the different serial nets provided. It is also possible to manage a standard multipole island by means of a Sub-D adapter or through an integrated node in the island. The typical Series F single modularity allows the installation of up to 24 solenoids on 24 valve positions, even in the Fieldbus version. The use of technopolymer in this Series has allowed to realize a valve island which is characterized by small dimensions, high flow and reduced weight.

The reduced dimensions, its flexibility during the assembly as well as the wide range of valve functions make Series F a highly innovative product which is suitable for several application requirements. Usable silencers (Mod. 2939).

Manuals, instruction sheets and configuration files are available on the site <http://catalogue.camozzi.com> or by means of the QR code indicated on the label of the product.

GENERAL CHARACTERISTICS

PNEUMATIC SECTION

Valve construction	spool with seals
Valve functions	5/2 monostable and bistable - 5/3 CC - 2x2/2 NO2x2/2 NC - 1x2/2 NC + 1x2/2 NO - 2x3/2 NO - 2x3/2 NC - 1x3/2 NC + 1x3/2 NO
Materials	aluminium spool, HNBR seals, other seals in NBR, brass cartridges, technopolymer body and end covers
Connections	Inlets 2 and 4, size 1 (12 mm) = tube \varnothing 4; \varnothing 6 Inlets 2 and 4, size 2 (14 mm) = tube \varnothing 4; \varnothing 6; \varnothing 8 Supply 1, size 1 and 2 = tube \varnothing 8; \varnothing 10 Servo pilot 12/14, size 1 and 2 = tube \varnothing 6 Exhausts 3/5, size 1 and 2 = tube \varnothing 8; \varnothing 10 Exhausts 82/84, size 1 and 2 = tube \varnothing 6
Temperature	0 ÷ 50°C
Air specifications	Filtered compressed air, non lubricated, class 6.4.4 according to ISO 8573-1:2010 standard. If lubrication is necessary, please use only oils with maximum viscosity of 32 Cst and the version with external servo-pilot supply. The servo-pilot supply air quality class must be 6.4.4 according to ISO 8573-1:2010 standard.
Valve sizes	12 mm - 14 mm
Working pressure	- 0,9 ÷ 10 bar
Pilot pressure	3 ÷ 7 bar - 4.5 ÷ 7 bar (with working pressure exceeding 6 bar for the versions 2x2/2 and 2x3/2)
Flow rate	250 NI/min (12 mm) - 500 NI/min (14 mm)
Mounting position	any position
Duty cycle	ED 100%
Protection class (according to EN 60529)	IP40

ELECTRICAL SECTION - MULTIPOLE VERSION

Supply voltage	24 V DC +/- 10%
Max number of solenoids	24
Max number of valve functions	24 (monostable)
Type of Sub-D connection	Sub-D 25 pin
Max absorption	0.8 A

ELECTRICAL SECTION - FIELDBUS VERSION

General characteristics	see the section about the Series CX multi-serial module on page 106
Max absorption	digital outputs / analogic outputs and inputs 3 A - digital/analogic inputs 3 A
Supply voltage	logic supply 24 V DC +/- 10% - power supply 24 V DC +/- 10%
Max number of operable coils	24 on 24 valve functions (monostable)

CODING EXAMPLE - MULTIPOLE VERSION

F	P	2	R	M	T	A	-	MB2CMUL2B	-	2QR3SLQR
---	---	---	---	---	---	---	---	-----------	---	----------

F	SERIES
P	TYPE: P = pneumatic A = accessories
2	SIZE: 1 = 12 mm 2 = 14 mm
R	MANUAL OVERRIDE: P = pressure actuation control R = actuation control with push & turn device
M	ELECTRICAL CONNECTION: M = multipole
T	CARTRIDGES FOR LEFT TERMINAL: S = tube Ø 8 T = tube Ø 10 Note: the cartridges for the right terminal are for tube Ø 6.
A	SERVO-PILOT SUPPLY: A = internal B = external
MB2CMUL2B	SOLENOID VALVES AND ADDITIONAL PLATES *: M = 5/2 monostable D = 5/2 monostable with bistable electric board B = 5/2 bistable C = 2x3/2 NC A = 2x3/2 NO G = 3/2 NC + 3/2 NO E = 2x2/2 NC F = 2x2/2 NO I = 2/2 NC + 2/2 NO V = 5/3 CC L = free position with passing electric board W = free position with bistable electric board Z = free position with monostable electric board X = supplementary supply and exhaust T = separated supply and exhaust U = separated supply, supplementary exhaust K = supplementary supply, separated exhaust
2QR3SLQR	CARTRIDGES FOR SOLENOID VALVES AND ADDITIONAL PLATES *: Q = tube Ø 4 R = tube Ø 6 S = tube Ø 8 (not for Size 1) L = free position (no cartridges) W = free position with bistable electric board (no cartridges) Z = free position with monostable electric board (no cartridges)
<p>* in case of identical and consecutive codes, in the choices "SOLENOID VALVES AND ADDITIONAL PLATES" and "CARTRIDGES FOR SOLENOID VALVES AND ADDITIONAL PLATES", replace the letters with the number.</p> <p>With the choice "CARTRIDGES FOR SOLENOID VALVES AND ADDITIONAL PLATES" both of the following connections are defined: 2 and 4; 1 and 3/5.</p> <p>Examples: FP2RMTA-MBCCMULMMBB-QQRSSLRRRQRR FP2RMTA-MB2CMUL3M2B-2QR2SL3RQ2R</p>	


CODING EXAMPLE - FIELDBUS VERSION

F	P	2	R	01	T	A	-	ABCR	-	MB2CMUL2B	-	2QR3SLQR
---	---	---	---	----	---	---	---	------	---	-----------	---	----------


F	SERIES
P	TYPE: P = pneumatic A = accessories
2	SIZE: 1 = 12 mm 2 = 14 mm
R	MANUAL OVERRIDE: P = pressure actuation control R = actuation control with push & turn device
01	PROTOCOL: 01 = PROFIBUS-DP 02 = DeviceNet 03 = CANopen 04 = EtherNet/IP 05 = EtherCAT 06 = PROFINET 99 = Expansion Module
T	CARTRIDGES FOR PNEUMATIC/ELECTRICAL TERMINAL: S = tube Ø 8 T = tube Ø 10 Note: the cartridges for the right terminal are for tube Ø 6.
A	SERVO-PILOT SUPPLY: A = internal B = external
ABCR	INPUT / OUTPUT MODULES: 0 = no module A = 8 digital inputs M8 B = 4 digital inputs M8 C = 2 analog inputs 4-20 mA D = 2 analog inputs 0-10 V E = 1 analog input 4-20 mA + 1 input 0-10 V Q = 4 M12 duo digital outputs R = 2 analog outputs 4-20 mA T = 2 analog outputs 0-10 V U = 1 analog output 4-20 mA + 1 output 0-10 V V = 1 analog output 4-20 mA + 1 input 0-10 V Z = 1 analog output 4-20 mA + 1 input 4-20 mA K = 1 analog output 0-10 V + 1 input 0-10 V Y = 1 analog output 0-10 V + 1 input 4-20 mA S = Initial subnet module
MB2CMUL2B	SOLENOID VALVES AND ADDITIONAL PLATES: M = 5/2 monostable D = 5/2 monostable with bistable electric board B = 5/2 bistable C = 2x3/2 NC A = 2x3/2 NO G = 3/2 NC + 3/2 NO E = 2x2/2 NC F = 2x2/2 NO I = 2/2 NC + 2/2 NO V = 5/3 CC L = free position with passing electric board W = free position with bistable electric board Z = free position with monostable electric board X = supplementary supply and exhaust T = separated supply and exhaust U = separated supply, supplementary exhaust K = supplementary supply, separated exhaust
2QR3SLQR	CARTRIDGES FOR SOLENOID VALVES AND ADDITIONAL PLATES: Q = tube Ø 4 R = tube Ø 6 S = tube Ø 8 (not for Size 1) L = free position (no cartridges) W = free position with bistable electric board (no cartridges) Z = free position with monostable electric board (no cartridges)

2


CONTROL

AVAILABLE FUNCTIONS - SOLENOID VALVES SYMBOLS for FP..R - manual override WITH push&turn device



M = 5/2, monostable




D = 5/2, monostable with bistable board




B = 5/2, bistable




V = 5/3, Centres Closed




C = 2x3/2 NC




A = 2x3/2 NO




G = 1x3/2 NC + 1x3/2 NO




E = 2x2/2 NC




F = 2x2/2 NO




I = 1x2/2 NC + 1x2/2 NO




Manual override, version R :
pressure actuation control with PUSH & TURN device.

AVAILABLE FUNCTIONS - SOLENOID VALVES SYMBOLS for FP..P - manual override WITHOUT push&turn device



M = 5/2, monostable




D = 5/2, monostable with bistable board




B = 5/2, bistable




V = 5/3, Centres Closed




C = 2x3/2 NC




A = 2x3/2 NO




G = 1x3/2 NC + 1x3/2 NO




E = 2x2/2 NC



F = 2x2/2 NO



I = 1x2/2 NC + 1x2/2 NO



Manual override, version P :
pressure actuation control without PUSH & TURN device (PUSH only).

CODING EXAMPLES of SINGLE VALVE (spare part) and TERMINALS (accessories)

CODING EXAMPLE OF A SINGLE SOLENOID VALVE		CODING EXAMPLE OF INTERMEDIATE PLATES	
FP2V-MQR		FP2V-WQ	
F	Series	F	Series
P	Type: P = pneumatic	P	Type: P = pneumatic
2	Size: 1 = 12 mm 2 = 14 mm	2	Size: 1 = 12 mm 2 = 14 mm
V	Solenoid valve or additional plate	V	Solenoid valve or additional plate
-		-	
M	Type of function: M = 5/2 monostable D = 5/2 monostable with bistable board B = 5/2 bistable C = 2 x 3/2 NC A = 2 x 3/2 NO G = 3/2 NC + 3/2 NO E = 2 x 2/2 NC F = 2 x 2/2 NO I = 2/2 NC + 2/2 NO V = 5/3 CC	W	Type of function: L = free position W = free position with bistable board Z = free position with monostable board X = supplementary power supply and exhaust T = separated power supply and exhaust U = separated power supply and supplementary exhaust K = supplementary power supply and separated exhaust
Q	Cartridges for solenoid valves: Q = Ø4 R = Ø6 S = Ø8 (not for Size 1)	Q	Cartridges for plates: Q = Ø4 R = Ø6 S = Ø8 (not for Size 1) L = free position (no cartridges) W = free position with bistable board (no cartridges) Z = free position with monostable board (no cartridges)
R	Type of manual override: R = push and turn (bistable) P = pressure (monostable)		
CODING EXAMPLE OF A LEFT TERMINAL		CODING EXAMPLE OF A RIGHT TERMINAL	
FA2T-S		FA2T-AR	
F	Series	F	Series
A	Accessory	A	Accessory
2	Size: 1 = 12 mm 2 = 14 mm	2	Size: 1 = 12 mm 2 = 14 mm
T	Type of accessory: T = terminal	T	Type of accessory: T = terminal
-		-	
S	Cartridges: = no cartridge S = Ø8 T = Ø10	A	Type of servo-pilot: A = internal B = external
		R	Cartridges: R = Ø6


Series HN valve islands, Multipole and Fieldbus

New version

Multipole connection with 25 or 37 pins

Serial connection with the most common communication protocols

Valve functions: 2x2/2; 2x3/2; 5/2; 5/3 CC

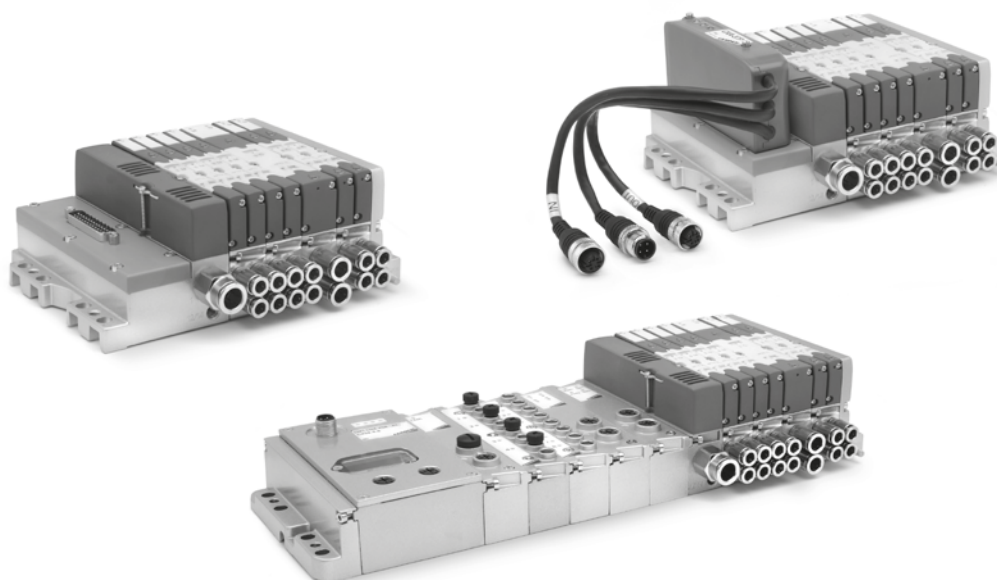

Thanks to the large range of options available, the Series HN valve islands represent an excellent solution for different applications, particularly in automation systems. Small dimensions, high flow, pneumatic and electric modularity, electric connections on boards, possibility to interface with the multi-serial node Series CX, optimization of the signal

distribution thanks to subbases for monostable and bistable solenoid valves are only some of the features that make this series a particularly innovative product. Manuals, instruction sheets and configuration files are available on the site <http://catalogue.camozzi.com> or by means of the QR code indicated on the table of the product.

GENERAL DATA

PNEUMATIC SECTION

Valve construction	spool type with seals
Valve functions	5/2 monostable and bistable - 5/3 CC - 2 x 2/2 NO - 2 x 2/2 NC - 1 x 2/2 NC+ 1 x NO - 2 x 3/2 NC - 2 x 3/2 NO 1 x 3/2 NC+ 1 x 3/2 NO
Materials	spool in aluminium, spool seals in HNBR, other seals in NBR, cartridges in brass, body and end covers in technopolymer, subbases in aluminium
Connections	Inlets 2 and 4, size 10,5 mm: M7, tube \varnothing 4, tube \varnothing 6 Inlets 2 and 4, size 21 mm: G1/8, tube \varnothing 6, tube \varnothing 8 Supply 1: G1/4, tube \varnothing 8, tube \varnothing 10 Supply 12/14: M7 Exhausts 3 and 5: G1/4 or with integrated silencer Exhausts 82/84: M7
Temperature	0 + 50°C
Air specifications	Filtered compressed air, non lubricated, class 6.4.4 according to ISO 8573-1:2010. If lubrication is necessary, please only use oils with maximum viscosity of 32 Cst and the version with external servo-pilot supply. The servo-pilot supply air quality class must be 6.4.4 according to ISO 8573-1:2010 (do not lubricate).
Valve sizes	10.5mm (2 valves for each subbase) - 21mm (1 valve for each subbase)
Working pressure	- 0,9 + 10 bar
Pilot pressure	3 + 7 bar - 4.5 + 7 bar (with working pressure exceeding 6 bar for the versions 2x2/2 and 2x3/2)
Flow rate	400 NI/min (10.5 mm) - 700 NI/min (21 mm)
Mounting position	any position
Protection class	IP 65

ELECTRICAL SECTION - MULTIPOLE VERSION

Type of Sub-D connector	25 or 37 pins
Max. absorption	0.8 A (with Sub-D connector 25 pins) - 1 A (with Sub-D connector 37 pins)
Supply voltage	24 V DC +/- 10%
Max. number of coils to operate	24 on 20 valve positions (with Sub-D connector 25 pins) - 32 on 28 valve positions (with Sub-D connector 37 pins)
Valve signalling	yellow led

ELECTRICAL SECTION - FIELDBUS VERSION

General data	see the section about the Series CX multi-serial module on page 106
Max absorption	digital outputs / analog outputs and inputs 3A - digital/analog inputs 3A
Supply voltage	logic supply 24 V DC +/- 10% - power supply 24 V DC +/- 10%
Max. number of coils to operate	32 on 28 valve positions

CODING EXAMPLE - MULTIPOLE VERSION

HN	5	M	-	03A	-	2Q4AZ2A	-	2B8M4C	-	A
----	---	---	---	-----	---	---------	---	--------	---	---

HN	SERIES									
5	SIZE: 1 = 10.5 2 = 21 5 = Mixed									
M	ELECTRICAL CONNECTION: M = Multipole 25 pin PNP N = Multipole 25 pin NPN H = Multipole 37 pin PNP L = Multipole 37 pin NPN									
03A	<div> <div> CONNECTION: 000 = without connector/cable </div> <div> CONNECTOR WITH CABLE AXIAL OUTPUT: 03A = 3m 05A = 5m 10A = 10m 15A = 15m 20A = 20m 25A = 25m </div> <div> CONNECTOR WITHOUT CABLE: 4XA = 25 pins axial 4XR = 25 pins radial 9XA = 37 pins axial 9XR = 37 pins radial </div> </div> <div> CONNECTOR WITH CABLE RADIAL OUTPUT: 03R = 3m 05R = 5m 10R = 10m 15R = 15m 20R = 20m 25R = 25m </div>									
2Q4AZ2A	<div> SUBBASES FOR 2 SOLENOID VALVES SIZE 1 (*): A (AZ) = M7 threads B (BZ) = 4 fittings for tube Ø4 C (CZ) = 4 fittings for tube Ø6 D (DZ) = channel 1, 3, 5 closed; M7 threads E (EZ) = channel 1, 3, 5 closed; cartridges tube Ø4 F (FZ) = channel 1, 3, 5 closed; cartridges tube Ø6 G (GZ) = channel 3, 5 closed; M7 threads H (HZ) = channel 3, 5 closed; cartridges tube Ø4 I (IZ) = channel 3, 5 closed; cartridges tube Ø6 L (LZ) = channel 1 closed; M7 threads M (MZ) = channel 1 closed; cartridges tube Ø4 N (NZ) = channel 1 closed; cartridges tube Ø6 </div> <div> (*) Subbases with "Z" at the end of their code are used with monostable solenoid valves </div> <div> FOR SOLENOID VALVES SIZE 2: Q = G 1/8 threads R = cartridges for tube Ø6 S = cartridges for tube Ø8 </div>									
2B8M4C	<div> SOLENOID VALVES Size 1 and 2: 0 = island without solenoid valves M = 5/2 Monostable B = 5/2 Bistable V = 5/3 Centres Closed C = 2 x 3/2 NC A = 2 x 3/2 NO G = 1 x 3/2 NC + 1 x 3/2 NO E = 2 x 2/2 NC F = 2 x 2/2 NO I = 1 x 2/2 NC + 1 x 2/2 NO L = free position </div> <div> SOLENOID VALVE + PRESSURE REGULATOR on channel 1 (size 2 only): N = 5/2 Monostable P = 5/2 Bistable Q = 5/3 Centres Closed R = 2 x 3/2 NC S = 2 x 3/2 NO T = 1 x 3/2 NC + 1 x 3/2 NO U = 2 x 2/2 NC X = 2 x 2/2 NO Y = 1 x 2/2 NC + 1 x 2/2 NO </div>									
A	<div> THREADED TERMINAL PLATES: A = 1, 12/14 in common 3/5, 82/84 threaded ports B = 1, 12/14 separated 3/5, 82/84 threaded ports C = 1, 12/14 in common 3/5, 82/84 with integrated silencer D = 1, 12/14 separated 3/5, 82/84 with integrated silencer </div> <div> TERMINAL PLATES with FITTINGS FOR TUBE Ø 8 on PORT 1: E = 1, 12/14 in common 3/5, 82/84 conveyable F = 1, 12/14 separated 3/5, 82/84 conveyable G = 1, 12/14 in common 3/5, 82/84 with integrated silencer H = 1, 12/14 separated 3/5, 82/84 with integrated silencer </div> <div> TERMINAL PLATES with FITTINGS FOR TUBE Ø 10 on PORT 1: I = 1, 12/14 in common 3/5, 82/84 conveyable L = 1, 12/14 separated 3/5, 82/84 conveyable M = 1, 12/14 in common 3/5, 82/84 with integrated silencer N = 1, 12/14 separated 3/5, 82/84 with integrated silencer </div>									

In presence of identical consequent codes both for the subbases as for the valves you need to substitute the letter with the number.
 Ex: HN5M-03A-ABCS-MMCCBBB-A is converted to HN5M-03A-ABCS-2M2C3B-A.


CODING EXAMPLE - FIELDBUS VERSION

HN	5	01	-	ABCD	-	2Q4AZ2A	-	2B8M4C	-	A
----	---	----	---	------	---	---------	---	--------	---	---


HN	SERIES		
5	SIZE: 1 = 10.5 2 = 21 5 = Mixed		
01	PROTOCOL: 01 = PROFIBUS-DP 02 = DeviceNet 03 = CANopen 04 = EtherNet/IP 05 = EtherCAT 06 = PROFINET 99 = Expansion module		
ABCD	INPUT / OUTPUT MODULES: 0 = no module	INPUT / OUTPUT MODULES: A = 8 Digital Inputs M8 B = 4 Digital Inputs M8 C = 2 Analog Inputs 4-20mA D = 2 Analog Inputs 0-10V E = 1 Analog Input 4-20mA + 1 Input 0-10V Q = 4 Digital Outputs M12 duo R = 2 Analog Outputs 4-20mA T = 2 Analog Outputs 0-10V U = 1 Analog Output 4-20mA + 1 Output 0-10V V = 1 Analog Output 4-20mA + 1 Input 0-10V Z = 1 Analog Output 4-20mA + 1 Input 4-20mA K = 1 Analog Output 0-10V + 1 Input 0-10V Y = 1 Analog Output 0-10V + 1 Input 4-20mA	INPUT / OUTPUT MODULES: S = Initial subnet module
2Q4AZ2A	SUBBASES FOR 2 SOLENOID VALVES SIZE 1 (*): A (AZ) = M7 threads B (BZ) = 4 fittings for tube Ø4 C (CZ) = 4 fittings for tube Ø6 D (DZ) = channel 1, 3, 5 closed; M7 threads E (EZ) = channel 1, 3, 5 closed; cartridges tube Ø4 F (FZ) = channel 1, 3, 5 closed; cartridges tube Ø6 G (GZ) = channel 3, 5 closed; M7 threads H (HZ) = channel 3, 5 closed; cartridges tube Ø4 I (IZ) = channel 3, 5 closed; cartridges tube Ø6 L (LZ) = channel 1 closed; M7 threads M (MZ) = channel 1 closed; cartridges tube Ø4 N (NZ) = channel 1 closed; cartridges tube Ø6 (* Subbases with "Z" at the end of their code are used with monostable solenoid valves FOR SOLENOID VALVES SIZE 2: Q = G 1/8 threads R = cartridges for tube Ø6 S = cartridges for tube Ø8	SUBBASES FOR PNEUMATIC SUPPLY: X = supplementary supply and exhaust Y = supplementary supply and exhaust with integrated silencer W = supply from the exhausts FOR ELECTRICAL SUPPLY: K = separation of electrical supply	SEALS: T = diaphragm on channels 1, 3, 5 U = diaphragm seal on channel 1 V = diaphragm seal on channels 3, 5
2B8M4C	SOLENOID VALVES Size 1 and 2: 0 = island without solenoid valves M = 5/2 Monostable B = 5/2 Bistable V = 5/3 Centres Closed C = 2 x 3/2 NC A = 2 x 3/2 NO G = 1 x 3/2 NC + 1 x 3/2 NO E = 2 x 2/2 NC F = 2 x 2/2 NO I = 1 x 2/2 NC + 1 x 2/2 NO L = free position	SOLENOID VALVE + PRESSURE REGULATOR on channel 1 (size 2 only): N = 5/2 Monostable P = 5/2 Bistable Q = 5/3 Centres Closed R = 2 x 3/2 NC S = 2 x 3/2 NO T = 1 x 3/2 NC + 1 x 3/2 NO U = 2 x 2/2 NC X = 2 x 2/2 NO Y = 1 x 2/2 NC + 1 x 2/2 NO	
A	THREADED TERMINAL PLATES: A = 1, 12/14 in common 3/5, 82/84 threaded ports B = 1, 12/14 separated 3/5, 82/84 threaded ports C = 1, 12/14 in common 3/5, 82/84 with integrated silencer D = 1, 12/14 separated 3/5, 82/84 with integrated silencer	TERMINAL PLATES with CARTRIDGES Ø 8: E = 1, 12/14 in common 3/5, 82/84 conveyable F = 1, 12/14 separated 3/5, 82/84 conveyable G = 1, 12/14 in common 3/5, 82/84 with integrated silencer H = 1, 12/14 separated 3/5, 82/84 with integrated silencer	TERMINAL PLATES with CARTRIDGES Ø 10: I = 1, 12/14 in common 3/5, 82/84 conveyable L = 1, 12/14 separated 3/5, 82/84 conveyable M = 1, 12/14 in common 3/5, 82/84 with integrated silencer N = 1, 12/14 separated 3/5, 82/84 with integrated silencer

X, Y and K sub-bases will be equipped with threads or cartridges of the same size of port 1, see the choice "Type of terminal plates". In presence of identical consequent codes both for sub-bases and for valves, you need to substitute the letter with the number.
 Ex: HN501-ABCD-ABCS-MMCCBBB-A is converted to HN501-ABCD-ABCS-2M2C3B-A.


AVAILABLE FUNCTION - SYMBOLS FOR SOLENOID VALVES




M = 5/2-way, Monostable




B = 5/2-way, Bistable





V = 5/3-way Centres Closed




C = 2 x 3/2-way NC





A = 2 x 3/2-way NO

G = 1 x 3/2-way NC +
1 x 3/2-way NO


E = 2 x 2/2-way NC




F = 2 x 2/2-way NO

I = 1 x 2/2-way NC +
1 x 2/2-way NO


L = free position

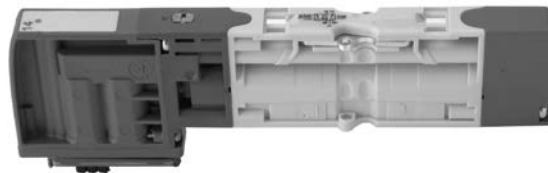


AVAILABLE FUNCTIONS - SYMBOLS FOR SOLENOID VALVES WITH PRESSURE REGULATOR




N = 5/2-way, Monostable




P = 5/2-way, Bistable





Q = 5/3-way Centres Closed




R = 2 x 3/2-way NC





S = 2 x 3/2-way NO

T = 1 x 3/2-way NC +
1 x 3/2-way NO

U = 2 x 2/2-way NC



X = 2 x 2/2-way NO

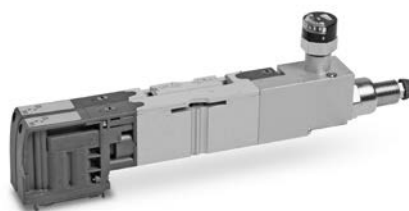Y = 1 x 2/2-way NC +
1 x 2/2-way NO

It can be assembled on subbase size 21 only.

AVAILABLE FUNCTIONS - SUBBASE TYPES



Through-subbase s. 10.5
A=M7, B=Ø4, C=Ø6 [*]



Diaphragm lines 1, 3 5
D=M7, E=Ø4, F=Ø6 [*]



Diaphragm line 1
L=M7, M=Ø4, N=Ø6 [*]



Diaphragm lines 3, 5
G=M7, H=Ø4, I=Ø6 [*]



Through-subbase s. 21
Q = 1/8, R = Ø6, S = Ø8



X = supplementary supply and exhaust




K = interm. plate to sep. elec. and suppl. supply



Y = suppl. supply + exhaust with silencer



Z = electro-pneum. interface for HP...F/G/R



W = plate for supply from exhausts



U = Diaphragm seal - Line 1




V = Diaphragm seal - Lines 3, 5



P = Through seal



T = Diaphragm seal - Lines 1, 3, 5

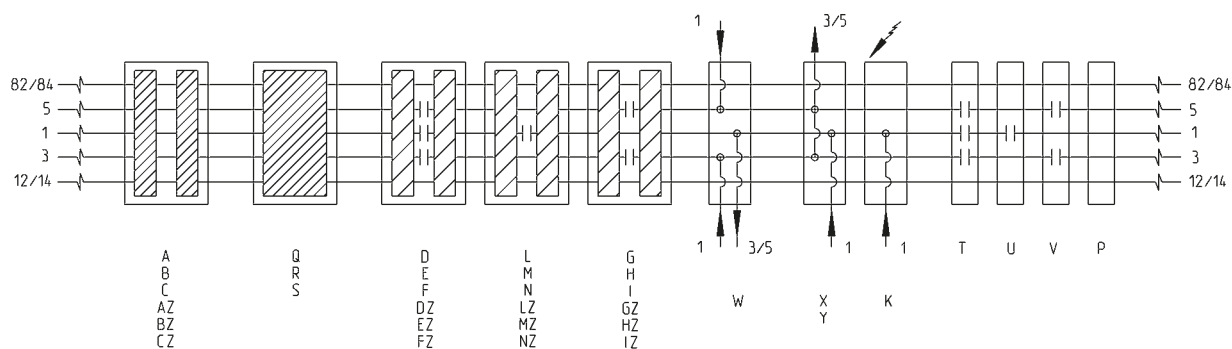

[*] The subbases A, B, C, D, E, F, G, H, I, L, M, N are available also with a board to be used with monostable solenoid valves. To order this version it is necessary to add Z at the end of the code of the standard subbase. Example: AZ instead of A. For further details we suggest you to see the coding example.

CODING EXAMPLE OF MULTIPOLE AND FIELDBUS INTERFACES - Accessories

HN	A	0	M	-	A
----	---	---	---	---	---

HN	SERIES				
A	TYPE: A = Accessory				
0	SIZE: 0 = not defined				
M	ELECTRICAL CONNECTION: M = 25 pin PNP Multipole N = 25 pin NPN Multipole H = 37 pin PNP Multipole L = 37 pin NPN Multipole I = HN interface with Series CX				
A	TERMINALS: A = 1, 12/14 in common - 3/5, 82/84 with thread B = 1, 12/14 separated - 3/5, 82/84 with thread C = 1, 12/14 in common - 3/5, 82/84 with silencer D = 1, 12/14 separated - 3/5, 82/84 with silencer NOTE: The Right Terminal is supplied with seals and fixing screws and available as accessory with the commercial code HA0T-H				

Detailed descriptions of the available accessories can be found in the valve island catalogue

CODING EXAMPLE OF SINGLE VALVE (Spare part)

H	P	1	V	-	M
---	---	---	---	---	---

H	SERIES	
P	TYPE: P = pneumatic	
1	SIZE: 1 = 10.5 2 = 21	
V	TYPE OF ACCESSORY: V = Solenoid valve	
M	SOLENOID VALVE: M = 5/2 Monostable B = 5/2 Bistable V = 5/3 Centres Closed C = 2 x 3/2 NC A = 2 x 3/2 NO G = 1 x 3/2 NC + 1 x 3/2 NO E = 2 x 2/2 NC F = 2 x 2/2 NO I = 1 x 2/2 NC + 1 x 2/2 NO L = free position	SOLENOID VALVE + REGULATOR + SUBBASE N = 5/2 Monostable P = 5/2 Bistable Q = 5/3 Centres Closed R = 2 x 3/2 NC S = 2 x 3/2 NO T = 1 x 3/2 NC + 1 x 3/2 NO U = 2 x 2/2 NC X = 2 x 2/2 NO Y = 1 x 2/2 NC + 1 x 2/2 NO

Detailed descriptions of the available accessories can be found in the valve island catalogue

CODING EXAMPLE OF SUBBASES - Accessories

H	A	1	R	-	A
---	---	---	---	---	---

H	SERIES	
A	TYPE: A = accessories	
1	SIZE: 0 = for X-Y-K-T-U-V-Z 1 = 10.5 2 = 21	
R	TYPE OF ACCESSORY: R = subbase for multipole connection G = seal W = subbase without electronic board (option valid only for position 2a) See the components list in the valve island catalogue	
A	SUBBASE: A = through - M7 threads AZ = through - M7 threads, monostable D = channel 1, 3, 5 closed - M7 threads DZ = channel 1, 3, 5 closed - M7 threads, monostable G = channel 3, 5 closed - M7 threads GZ = channel 3, 5 closed - M7 threads, monostable Q = through - G1/8 threads X = supplementary supply and exhaust Y = supplementary supply and exhaust with integrated silencer W = supply from the exhausts K = separation of electrical supply and supplementary pneumatic supply	SEAL: T = diaphragm seal for the closure of channels 1, 3, 5 U = diaphragm seal for the closure of channel 1 V = diaphragm seal for the closure of channels 3, 5 P = through

NOTE: subbases are always supplied without connection fittings

Detailed descriptions of the available accessories can be found in the components list on the valve island catalogue

Series Y valve islands, Individual, Multipole and Fieldbus

Valve islands with pneumatics and electronics integrated

Available versions: Individual, Multipole, Fieldbus (Profibus-DP, DeviceNet, CANopen)


Valve functions: 2x2/2, 2x3/2, 5/2, 5/3 CC



Individual version YP1K

Valve islands with individual electrical connection

The electrical connection is realised by means of single connectors which are mounted on electro-pilots Series K. The modules which compose the valve islands can be of 2, 4, 6 or 8 valve positions and they can be separated from each other by different types of seals. Although the number of valve positions can be unlimited, it is recommended to insert an intermediate plate for supplementary supply after every 8 positions. The manual override and the signalling LED which are used in this valve islands are the same which are traditionally used on electro-pilots.

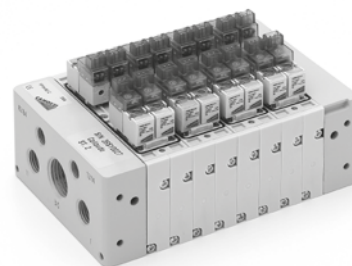

Multipole version YP1M

Valve islands with Multipole electrical connection

The modules which compose the valve islands can be of 2, 4, 6 or 8 valve positions and they can be separated from each other by different types of seals.

The electronics commonly used in the fieldbus versions allow the connection of the same expansion module on initial modules using different Protocols.


The Multipole cover is available in three sizes, with 4, 6 or 8 valve positions. Every valve position can be freely equipped with monostable or bistable valves.

It is possible to join many valve islands by placing an intermediate plate for supplementary supply under the Sub-D plug of the module which has to be connected.


The use of a plate for supplementary supply Mod. X allows to have many Sub-D plugs on a sole structure.

It is possible to join several valve islands to create a sole structure with as many Sub-D plugs as covers.

It is recommended to insert an intermediate plate for supplementary supply after every 8 positions.



Multipole connection is possible

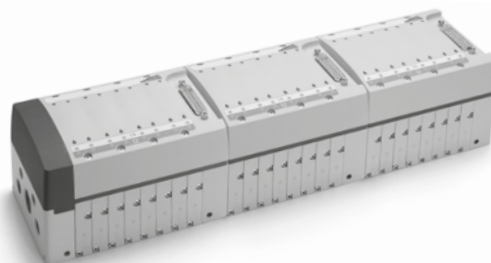

Fieldbus version YP1P - YP1D - YP1C

Valve islands with electrical Fieldbus connection initial module

The initial module cover has always 8 valve positions.


The initial module only can be connected with Fieldbus (Profibus-DP and other protocols) and 24V DC electrical supply.

Each initial module can accomodate up to 32 coils, which are present in the initial or in the connected expansion modules, and 48 inlets.

It recognizes automatically the position of the coils assigning them an address which follows a certain sequence.

Otherwise it is possible to set a specific address through the use of a PC.

It is recommended to insert an intermediate plate for supplementary supply after every 8 positions.



Valve islands with Fieldbus connection
(expansion module 8 positions for single
assembly)



Valve islands with Fieldbus connection
(expansion module 4 positions for single
assembly)



Valve islands with Fieldbus connection
(expansion module 2 positions for single
assembly)



Valve islands with Fieldbus connection
(expansion module 8 positions for combined
assembly)




Valve islands with Fieldbus connection
(expansion module 4 positions for combined
assembly)



Valve islands with Fieldbus connection
(expansion module 2 positions for combined
assembly)




Possibility of Fieldbus connection

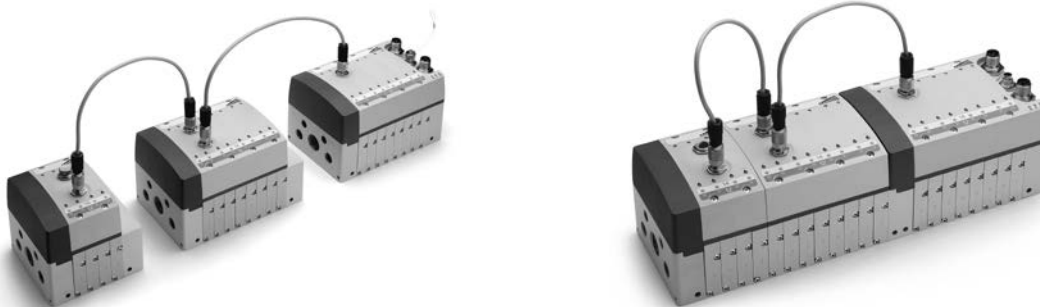


Electrical digital input module ME-1600 DL

The Digital Input Module allows for connection of 16 electrical input signals via 8M12 industry standard connections. The M12 connections are a 5 pole (4+PE) version with 2 input signals per connector position. The input module can be positioned at any point of the fieldbus. A maximum of 3 input modules can be connected to the initial module, for a total of 48 inputs.

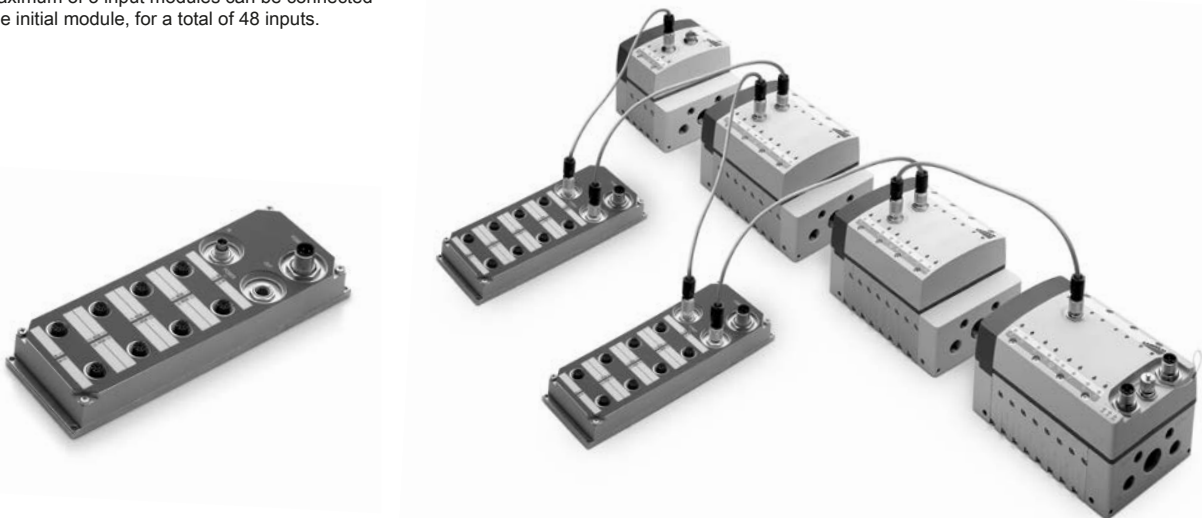

CODING

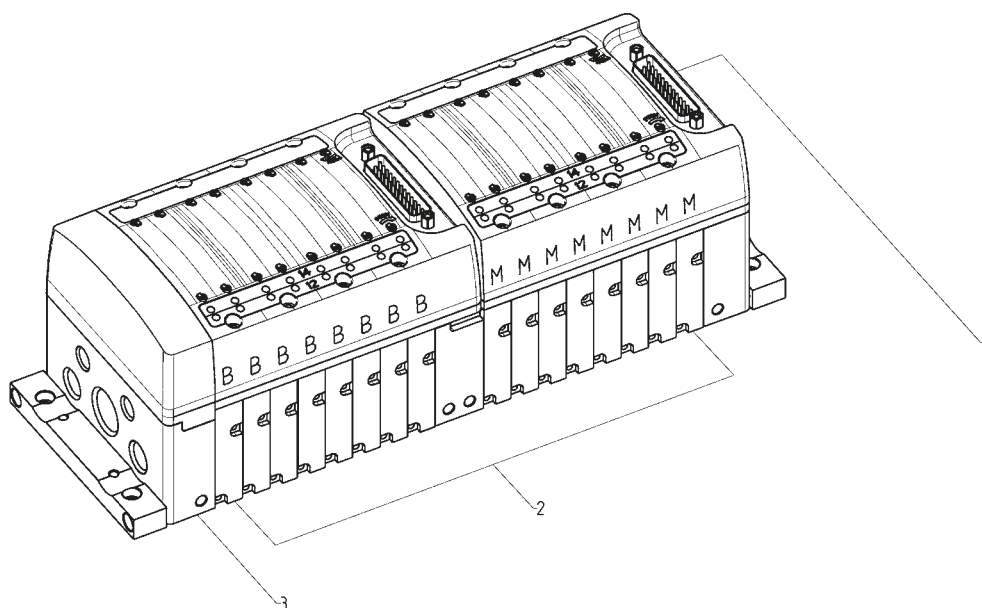

1 2 3

Y P 1 - - - ... -

1 2 3

Y P 1 M - 8 M P X P 8 B - C

(1) Code	Type of electrical connection	(2) Code	Type of valve	(3) Code	Type of terminal plates
K	Individual		-		-
M	Multipole (PNP)		-		-
P	Profibus-Dp		-		-
D	DeviceNet		-		-
C	CANopen		-		-
E	Expansion		-		-
-		M	5/2 Monostable		-
-		B	5/2 Bistable		-
-		V	5/3 CC		-
-		I	2 x 2/2 1 NO + 1 NC		-
-		E	2 x 2/2 NC		-
-		F	2 x 2/2 NO		-
-		G	2 x 3/2 1 NO + 1 NC		-
-		C	2 x 3/2 NC		-
-		A	2 x 3/2 NO		-
-		L	Free position		-
-		W	Additional supply module from 2 and 4		-
-		T	Diaphragm seal (modules separation)		-
-		P	Through seal (modules separation)		-
-		T/	Diaphragm seal (modules and cover separation)		-
-		P/	Through seal (modules and cover separation)		-
-		U	Diaphragm seal 3/5 opened		-
-		H	Diaphragm seal 3/5-11 opened		-
-		N	Diaphragm seal 1-11 opened		-
-		U/	Diaphragm seal 3/5 opened, modules and cover separ.		-
-		K	Module with 2 positions and 3/5-11 closed		-
-		R	Module with 2 positions and 3/5-1-11 closed		-
-		O	Module with 2 positions and 1-11 closed		-
-		Q	Module with 2 positions and 3/5 closed		-
-		X	Additional supply module		-
-			-	A	in common 1/11 - 12/14 individual 82/84 - 3/5
-			-	B	in common 1/11 individual 12/14 - 82/84 - 3/5
-			-	C	individual 1/11 - 12/14 - 82/84 - 3/5
-			-	D	in common 1/11 - 12/14 individual 82/84 - 3/5
-			-	E	in common 1/11 individual 12/14 - 82/84 - 3/5
-			-	F	individual 1/11 - 12/14 - 82/84 - 3/5
-			-	G	in common 1/11 - 12/14 individual 82/84 - 3/5
-			-	H	in common 1/11 individual 12/14 - 82/84 - 3/5
-			-	J	individual 1/11 - 12/14 - 82/84 - 3/5
-			-	Z	modules without terminal plate

Series CX multi-serial module

New

Interface with: PROFIBUS, CANopen, DeviceNet, EtherNet/IP, PROFINET, EtherCAT
Compatible with all Camozzi valve islands



The Series CX serial module, with IP65 protection class, interface with all major serial communication protocols as well as the new generation EtherCAT, EtherNet/IP and PROFINET protocols.
The highly resistant aluminium structure makes it suitable for mountings even in hard application conditions.
This serial module can be coupled with electric input and output modules and is able to handle up to a maximum of 1024 I/O. Its interface modules

enable direct connection to Series F, HN and 3 valve islands.
Through a subnet the connection system can be extended to remote valve islands.
Manuals, instruction sheets and configuration files are available on the site <http://catalogue.camozzi.com> or by means of the QR code indicated on the label of the product

GENERAL DATA

Number of digital output	1024
Number of digital input	1024
Maximum input absorption	1,5 A
Maximum output absorption	3 A
Logical supply voltage *	24 V DC +/-10%
Power supply voltage *	24 V DC +/-10%
Protection	overload and reverse polarity
Protection class	IP65
Conform with standards	EN-61326-1 EN-61010-1
Operating temperature	0-50°C
Material	Aluminium

* = the voltage range can change according to the range required by the external connected elements

CODING EXAMPLE


CX	05	-	2AC	-	QT2S
----	----	---	-----	---	------

CX	SERIES
05	PROTOCOL: 01 = PROFIBUS 02 = DeviceNet 03 = CANopen 04 = EtherNet/IP 05 = EtherCAT 06 = PROFINET 99 = Expansion Module
2AC	INPUTS: 0 = no module nA = 8 digital inputs M8 nB = 4 digital inputs M8 nC = 2 IN 4-20 mA nD = 2 IN 0-10 V nE = 1 IN 4-20 mA + 1 IN 0-10 V
QT2S	OUTPUTS: 0 = no module nQ = 4 M12 duo digital outputs nR = 2 OUT 4-20 mA nT = 2 OUT 0-10 V nU = 1 OUT 4-20 mA + 1 OUT 0-10 V nV = 1 OUT 4-20 mA + 1 IN 0-10 V nZ = 1 OUT 4-20 mA + 1 IN 4-20 mA nK = 1 OUT 0-10 V + 1 IN 0-10 V nY = 1 OUT 0-10 V + 1 IN 4-20 mA nS = initial subnet module

Fieldbus protocols - Technical data

Protocol	Max nr of nodes defined by the protocol	Communication speed defined by the protocol	Max number of I/O	LED 1 Yellow-Green	LED 2 Yellow-Green	LED 3 Red-Green	LED 4 Red
PROFIBUS	32/127	9,6 kBit/s per 1000 m 12 Mbit/s per < 100 m	1024 Input 1024 Output	absent	Green RUN	Red DIA	Red BF
CANopen	127	125 kBit/s 500 m 1 Mbit/s per 4 m	1024 Input 1024 Output	absent	Green IO	Red DIA	Red BF
DeviceNet	64	125 kBit/s 500 m 500 kbit/s per 100 m	1024 Input 1024 Output	absent	Green RUN	Red NS	Red MF
PROFINET	unlimited	100 Mbit/s per 100 m	1024 Input 1024 Output	Yellow LNK1	Yellow LNK2	Green PWR	Red DIA
EtherNet/IP	unlimited	100 Mbit/s per 100 m	1024 Input 1024 Output	Yellow LNK1	Yellow LNK2	Green PWR	Red DIA
EtherCAT	unlimited	100 Mbit/s per 100 m	1024 Input 1024 Output	Yellow LNK1	Yellow LNK2	Green PWR	Red DIA


CPU Module - pin configuration

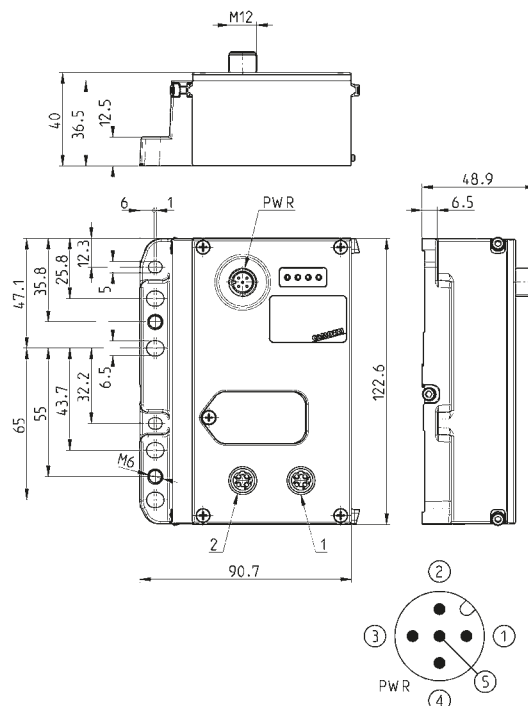

Mod.	Coding reference	Fieldbus Protocol	2	1	Bus-IN connector	Bus-OUT connector
CX01-0-0	01	PROFIBUS	Bus-IN	Bus-OUT	M12 B 5 pin male	M12 B 5 pin female
CX02-0-0	02	DeviceNet	Bus-IN	Bus-OUT	M12 A 5 pin male	M12 A 5 pin female
CX03-0-0	03	CANopen	Bus-IN	Bus-OUT	M12 A 5 pin male	M12 A 5 pin female
CX04-0-0	04	EtherNet/IP	Bus-OUT	Bus-IN	M12 D 5 pin female	M12 D 5 pin female
CX05-0-0	05	EtherCAT	Bus-OUT	Bus-IN	M12 D 5 pin female	M12 D 5 pin female
CX06-0-0	06	PROFINET	Bus-OUT	Bus-IN	M12 D 5 pin female	M12 D 5 pin female

Expansion Module - pin configuration

Note: to connect the Expansion with the subnet, we recommend the use of cables Mod. CS-SB04HB-... or CS-SC04HB-...

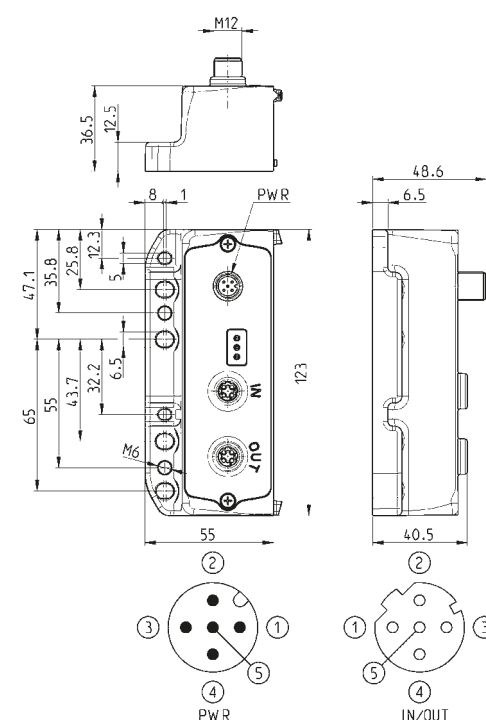


Mod.	Coding reference	Fieldbus Protocol	Bus-IN and Bus-OUT connector
CX99-0-0	99	Subnet expansion	M12 D 5 pin female

Initial subnet module Mod. ME3-0000-SL

This module can be connected only in presence of a CPU or Expansion module and can be mixed with other either digital or analog Input and Output devices.

Every subnet can have an extension of maximum 100 metres, with a maximum of 8 interruptions. Up to maximum 5 initial modules can be connected, one aside another or along the subnet in order to create a tree structure, in series or both, in order to optimize the length of the cables and the topology of the subnet in different applications. The module is equipped with the Bus-OUT connection only of subnet type M12 D 5 pin female.





Mod.	Coding reference	Bus-OUT connection	Max number of modules for subnet	Max extension of subnet per module
ME3-0000-SL	S	M12D 5 pin female	5	100 m

Sub-D adaptor module 25 and 37 pin Mod. CXA-25P and CXA-37P



Led 1 = Yellow LNK1
Led 2 = Yellow LNK2
Led 3 = Green PWR,
supply present and OK

It is an Expansion module of the subnet and can be connected to all valve islands with Sub-D 25 pin connection (Series F, HN and 3) or 37 pin connection (Series HN). It has its own M12A 4 pin male connection for the supply of the valves connected, distinguishing both logic supply and power supply and two M12 D 5 pin female connections for the Bus-IN and Bus-OUT of the subnet. The subnet can have a length of maximum 100 metres. The 25 pin adaptor module manages a fixed number of 24 digital outputs, while the 37 pin adaptor module manages a fixed number of 32 digital outputs. In both cases, every output can provide a maximum of 3 W to 24 V DC, with PWM outputs for which it is possible to set the working frequency value.

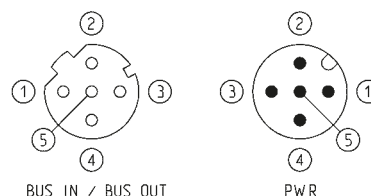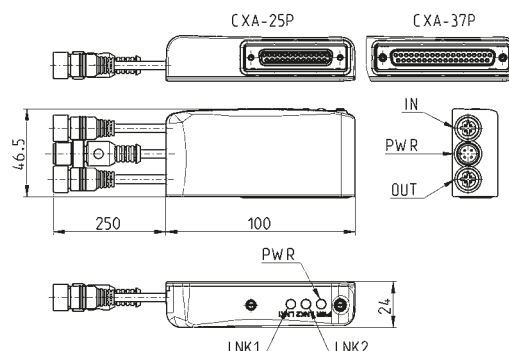

Mod.	Interface	Digital Outs	Bus-IN connection	Bus-OUT connection	PWR connection	Supply	Power for every Output
CXA-25P	Sub-D 25 pin	24	M12D 5 pin female	M12D 5 pin female	M12A 4 pin male	24 V DC	3 W
CXA-37P	Sub-D 37 pin	32	M12D 5 pin female	M12D 5 pin female	M12A 4 pin male	24 V DC	3 W

Connectors and accessories for valve islands

2

CONTROL

Straight Sub-D 25-pole female connector for Series 3 Plug-In, Y Multipole and F Mod.

G3X-3 G4X-10
G3X-5 G4X-15
G3X-10 G4X-20
G3X-15 G4X-25
G3X-20 G4X-25
G3X-25 G4X-3
G4X-5



Angular Sub-D 25-pole female connector for Series 3 Plug-In, Y Multipole and F Mod.

G3X1-3 G4X1-10
G3X1-5 G4X1-15
G3X1-10 G4X1-20
G3X1-15 G4X1-25
G3X1-20 G4X1-25
G3X1-25 G4X1-3
G4X1-5



Power supply straight female connector M12 4 poles. It can be used with Series 3 Fieldbus, Y, HN and CX Mod.

CS-LF04HB



Power supply angular female connector M12 4 poles. It can be used with Series 3 Fieldbus, Y, HN and CX Mod.

CS-LR04HB



Bus-In straight female connectors M12/M12B 5 poles. They can be used with Series 3 Fieldbus, Y, HN and CX Mod.

CS-LF05HC
CS-MF05HC



Bus-In angular female connectors M12/M12B 5 poles. They can be used with Series 3 Fieldbus, Y, HN and CX Mod.

CS-LR05HC
CS-MR05HC



Bus-Out straight male connectors M12/M12B 5 poles. They can be used with Series 3 Fieldbus, HN and CX Mod.

CS-LM05HC
CS-MM05HC



Bus-Out angular male connectors M12/M12B 5 poles. They can be used with Series 3 Fieldbus, HN and CX Mod.

CS-LS05HC
CS-MS05HC



Male connectors M12/M12B with terminal resistance. These connectors with serial terminal resistance can be used with Series 3 Fieldbus, HN and CX Mod.

CS-MQ05H0
CS-LP05H0



Male cable entry connector M8 3 poles for inputs modules. It can be used with Series HN and CX Mod.

CS-DM03HB



Male connector M9 with terminal resistance Cam.I.Net. This connector with sub-serial terminal resistance can be used with Series 3 Fieldbus, HN and CX Mod.

CS-FP05H0



Straight male connector DUO M12 5 poles. For the connection of digital input modules ME-1600-DL and digital output modules ME-0004-DL Mod.

CS-LD05HF



Angular male connector DUO M12 5 poles. For the connection of digital input modules ME-1600-DL and digital output modules ME-0004-DL Mod.

CS-LH05HF



Connectors with crimped cable for Series Y, Individual version Mod.

121-803 (cable 300 mm)
121-806 (cable 600 mm)
121-810 (cable 1000 mm)
121-830 (cable 3000 mm)



Programming cable for Series Y Mod.

CS-FZ03AD-C500



Expansion cable for Series Y and HN Mod.

CS-FW05HE-D025
CS-FW05HE-D100
CS-FW05HE-D250
CS-FW05HE-D500
CS-FW05HE-DA00



Extension with connector M8, 3 Pin Male / Female. For the connection of digital input modules ME-0008-DC (see the section Series 3 Fieldbus, HN and CX) Mod.

CS-DW03HB-C250
CS-DW03HB-C500



Cable with straight connectors For PROFINET, EtherCAT, EtherNet/IP and subnet Mod.

CS-SB04HB-D100
CS-SB04HB-D500
CS-SB04HB-DA00



Cable with 90° angular connectors For PROFINET, EtherCAT, EtherNet/IP and subnet Mod.

CS-SC04HB-D100
CS-SC04HB-D500
CS-SC04HB-DA00



USB SERIAL converter for programming cable. For Series Y Mod.

G8X3-G8W-1



Adaptor and panel mount for Ethernet RJ45 to M12 D networks For PROFINET, EtherCAT, EtherNet/IP Mod.

CS-SE04HB-F050



25M-25F Sub-D adaptor For Series Y valve islands with CXA-25P Mod.

G2X-G2W



Blanking plug for Series 3 Fieldbus, HN and CX Modules Mod.

CS-DFTP
CS-LFTP



Subnet terminating resistor Mod.

CS-SU04H0



Male wiring connector for Bus-IN and Bus-OUT. For PROFINET, EtherCAT, EtherNet/IP and for the subnet Mod.

CS-SM04H0



Mounting brackets for DIN rail. Suitable for Series 3 Fieldbus, Y, HN, F and CX manifolds. Supplied with: 2x plates, 2x screws M4x6 UNI 5931 Mod.

PCF-E520



Profibus-DP data line tee. Connection cable for Expansion Modules Series Y Mod.

CS-AA03EC



CANopen / DeviceNet data line tee. Connection cable for Expansion Modules Series Y and HN Mod.


CS-AA05EC



Series 2 mechanically operated minivalves

3/2-way

Ports: M5. Cartridge ø 4

Mod. **234-945**
235-945Mod. **244-945**
245-945Mod. **234-985**
235-985Mod. **244-985**
245-985Mod. **234-955**
235-955Mod. **244-955**
245-955Mod. **234-965**
235-965Mod. **244-965**
245-965

2

CONTROL

CODING EXAMPLE

2	3	4	-	94	5
2	SERIES				
3	FUNCTION: 3 = 3/2-way NC 4 = 3/2-way NO				
4	PORTS: 4 = cartridge ø 4 5 = M5				
94	ACTUATION: 94 = plunger 95 = lever/roller 96 = unidirectional lever 98 = plunger, panel mounting				
5	RESETTING: 5 = spring return				


Series 1 and 3 mechanically operated valves

Series 1: 3/2-way, 5/2-way. Ports: G1/8, G1/4


Series 3: 3/2-way, 5/2-way. Ports: G1/8




Mod. 338-945




Mod. 358-945




Mod. 338-955




Mod. 358-955




Mod. 338-965



Mod. 358-965




Mod. 138-945




Mod. 148-945




Mod. 158-945




Mod. 138-955




Mod. 158-955




Mod. 138-965



Mod. 134-945



Mod. 154-945



Mod. 134-955



Mod. 154-955

CODING EXAMPLE

3	3	8	-	94	5
---	---	---	---	----	---

3

SERIES:
1
3

3

FUNCTION:
3 = 3/2 ways NC
4 = 3/2 ways NO (only Series 1)
5 = 5/2 ways

8

PORTS:
8 = G1/8
4 = G1/4 (only Series 1)

94

ACTION:
94 = plunger
95 = lever/roller
96 = unidirectional roller

5

RESETTING:
5 = spring return

Series 3 and 4 mechanically operated sensor valves

3/2-way, 5/2-way
Ports: G1/8, G1/4



2

CONTROL

CODING EXAMPLE


3	3	8	-	D15	-	9A5
3	SERIES: 3 4					
3	FUNCTION: 3 = 3/2-way NC - 4 = 3/2-way NO - 5 = 5/2-way					
8	PORTS: 8 = G1/8 - 4 = G1/4					
D15	ACTUATION: D15 = pressure drop/spring 015 = pressure/spring 011 = pressure/pressure					
9A5	DEVICES: 9A5 = lever sensor, spring return 194 = plunger sensor, spring return 294 = plunger sensor, bistable 195 = lever/roller, spring return 295 = lever/roller, bistable					

Series 3 - pneumatic Series 2 foot operated pedal electrical


Series 3: G1/4, 5/2-way, normally closed (NC) and normally open (NO)

Series 2: M5, 4/2 tube, 3/2-way, normally closed (NC)


Pneumatic foot operated pedal Series 2



Pneumatic foot operated pedal Series 3













Electrical foot operated pedal Series 3



Series 2 manually operated console minivalves

3/2-way, 5/3-way CC CO CP

Ports: M5. Cartridge ø 4



Panel hole adaptor ø 30
Supplied with:
2x reduction rings



Mod. **200-2230**

End cover



Mod. **210-000**
220-000













CODING EXAMPLE

















2	3	4	-	97	5
2	SERIES				
3	FUNCTION: 3 = 3/2-way NC 4 = 3/2-way NO 8 = 5/3-way CO (function realized with 2x 3/2-way NC valves)				
4	PORTS: 4 = cartridge ø 4 5 = M5				
97	MODE OF OPERATION: 87 = 3 position selector 89 = push button 97 = palm switch 90 = joystick 99 = 2 position selector 92 = pedal 904 = key				
5	RESETTING: 5 = spring return 0 = stable 2 = latching-twist to release 54 = joystick				

Series 1, 3, 4 and VMS manually operated valves

Series 1, 3 and 4: 3/2-way, 5/2-way, 5/3-way CC CO CP. Ports G1/8, G1/4

Series VMS: 3/2-way. Ports G1/8, G1/4, G3/8, G1/2

 <p>10(12) 2 12(10) 1(3) 13(1)</p> <p>Mod. 338-990</p>	 <p>12 4 2 14 5 1 13</p> <p>Mod. 358-990</p>	 <p>2 12(10) 1(3) 13(1)</p> <p>Mod. 338-895 Black 338-896 Green 338-897 Red</p>
 <p>4 2 14 5 1 13</p> <p>Mod. 358-895 Black 358-896 Green 358-897 Red</p>	 <p>2 12(10) 1(3) 13(1)</p> <p>Mod. 338-975 Black 338-976 Green 338-977 Red</p>	 <p>4 2 14 5 1 13</p> <p>Mod. 358-975 Black 358-976 Green 358-977 Red</p>
 <p>10(12) 2 12(10) 1(3) 13(1)</p> <p>Mod. 338-910</p> <p>2 12(10) 1(3) 13(1)</p> <p>Mod. 338-915</p>	 <p>12 4 2 14 5 1 13</p> <p>Mod. 358-910</p> <p>4 2 14 5 1 13</p> <p>Mod. 358-915</p>	 <p>10(12) 2 12(10) 1(3) 13(1)</p> <p>Mod. 338-900</p> <p>2 12(10) 1(3) 13(1)</p> <p>Mod. 338-905</p>
 <p>12 4 2 14 5 1 13</p> <p>Mod. 358-900</p> <p>4 2 14 5 1 13</p> <p>Mod. 358-905</p>	 <p>12 4 2 14 5 1 13</p> <p>Mod. 368-900</p> <p>12 4 2 14 5 1 13</p> <p>Mod. 368-905</p>	 <p>12 4 2 14 5 1 13</p> <p>Mod. 378-900</p> <p>12 4 2 14 5 1 13</p> <p>Mod. 378-905</p>



CODING EXAMPLE


3	3	8	-	900
---	---	---	---	-----

3	SERIES: 1 3 4
5	FUNCTION: 3 = 3/2-way NC 5 = 5/2-way 6 = 5/3-way CC 7 = 5/3-way CO
8	PORTS: 8 = G1/8 4 = G1/4
900	RESETTING: 895 = pushbutton, monostable, black 896 = pushbutton, monostable, green 897 = pushbutton, monostable, red 900 = lever, bistable 905 = lever, monostable 910 = knob, bistable 915 = knob, monostable 935 = digital monostable 975 = palm-switch, monostable, black 976 = palm-switch, monostable, green 977 = palm-switch, monostable, red 990 = switch, bistable

Series 2 mini-handle valves

Handle with incorporated micro valve 3/2, normally closed (NC) and normally open (NO)


Handle with incorporated micro switch

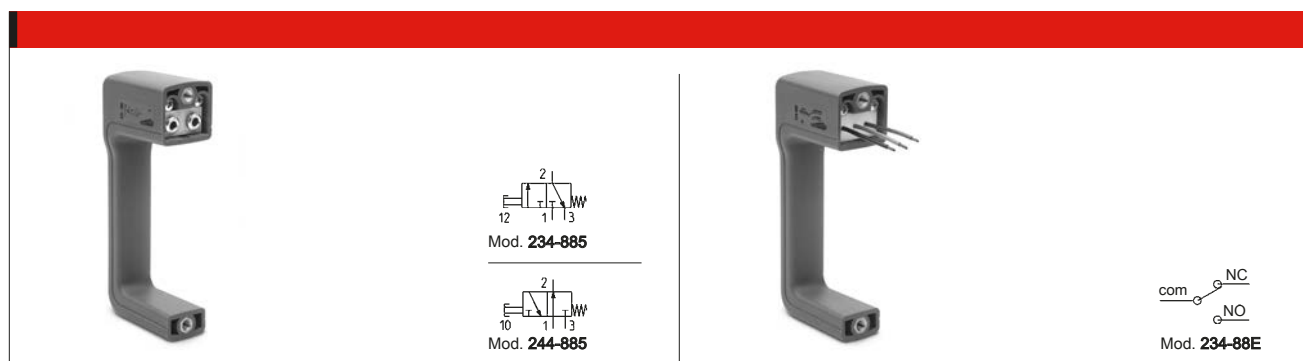


Series 2L basic logic valves

Cartridge \varnothing 4 mm

or - and - yes - not - memory

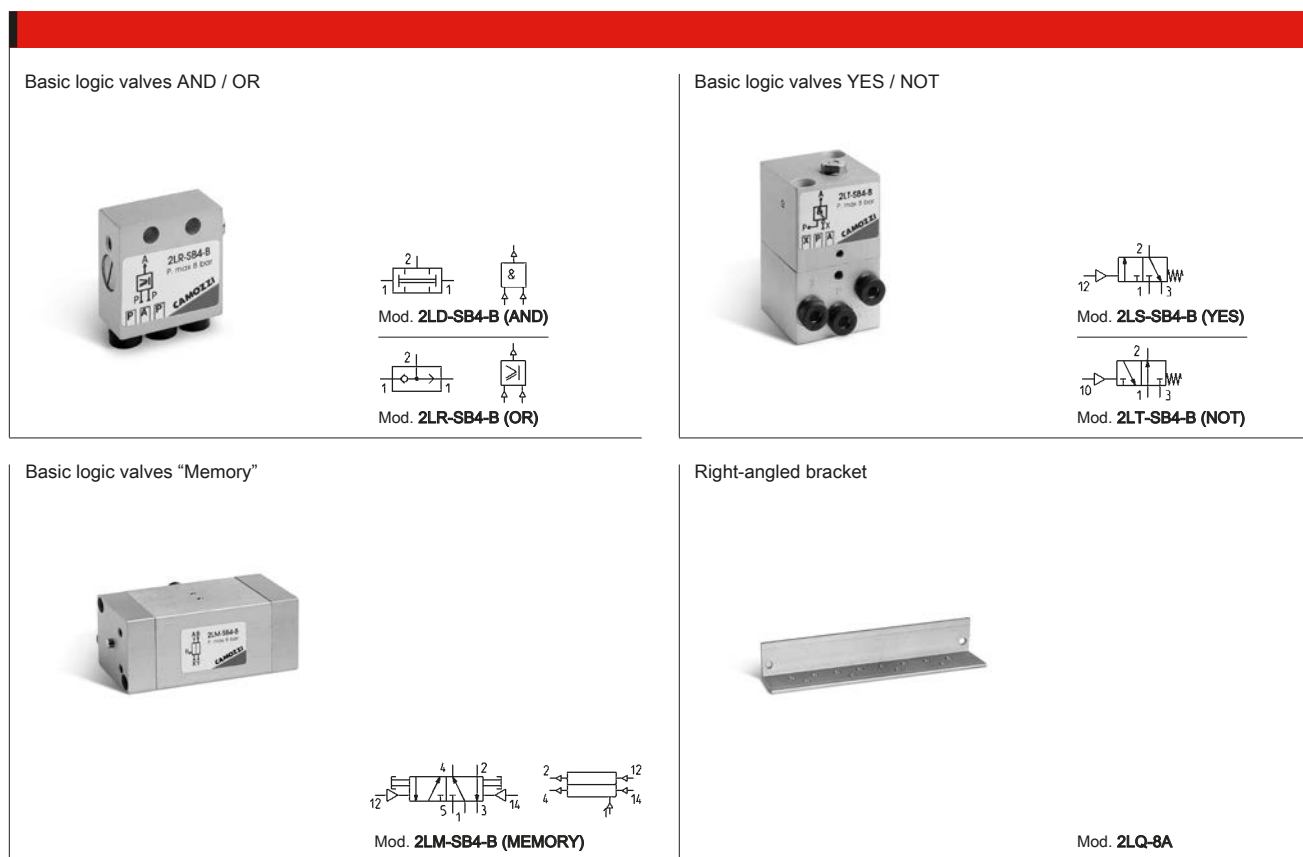

Pneumatically operated 3/2 NC amplifier valve - G1/8 ports

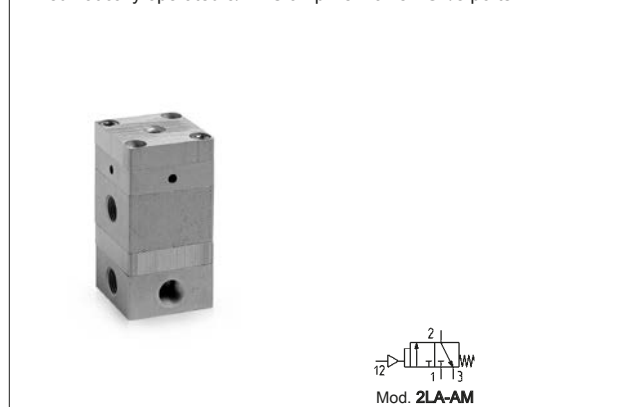

Sender and receiver sensor Series 2L - M5 ports



Series SCS, VNR, VSO, VSC and VMR automatic valves

Circuit selector Mod. SCS



Mod. SCS 668-06

Series VNR unidirectional valves


Mod. VNR 205-M5
VNR 210-1/8
VNR 843-07
VNR-238-3/8
VNR-212-1/2
VNR-234-3/4

Series VSO quick exhaust valves



Mod. VSO 425-M5

Series VSO quick exhaust valves



Mod. VSO 426-04

Series VSC quick exhaust valves


Mod. VSC 588-1/8
VSC 544-1/4
VSC 522-1/2

Valves with adjustable exhaust Mod. VMR



Mod. VMR 1/8-B10


Series VBO and VBU blocking valves

Ports: G1/8, G1/4, G3/8, G1/2

Unidirectional valves


Mod. VBU 1/8
VBU 1/4
VBU 3/8
VBU 1/2

Bidirectional valves


Mod. VBO 1/8
VBO 1/4
VBO 3/8
VBO 1/2

CODING EXAMPLE

VB	U	1/8
----	---	-----

VB SERIES

U VERSIONS:
U = unidirectional
O = bidirectional

1/8 PORTS:
1/8 = G1/8
1/4 = G1/4
3/8 = G3/8
1/2 = G1/2

Series SCU, MCU, SVU, MVU, SCO and MCO flow control valves

Unidirectional and bidirectional banjo flow control regulators

Ports M5, G1/8, G1/4, G3/8, G1/2




Mod. **SCU 602-M5**
SCU 604-1/8
SCU 606-1/4
SCU 608-3/8



Mod. **MCU 702-M5**
MCU 704-1/8
MCU 706-1/4
MCU 708-3/8


Types



SCU
MCU




SVU
MVU




SCO
MCO

SCU - MCU = direct assembly on cylinders
SVU - MVU = direct assembly on valves
SCO - MCO = direct assembly on cylinders or valves



Mod. **SVU 602-M5**
SVU 604-1/8
SVU 606-1/4




Mod. **MVU 702-M5**
MVU 704-1/8
MVU 706-1/4




Mod. **SCO 602-M5**
SCO 604-1/8
SCO 606-1/4



Mod. **MCO 702-M5**
MCO 704-1/8
MCO 706-1/4




Mod. **SCU 610-1/2**



Mod. **MCU 710-1/2**



Mod. SVU 610-1/2



Mod. MVU 710-1/2



Mod. SCO 610-1/2



Mod. MCO 710-1/2

CODING EXAMPLE

M	CU	7	02	-	M5
M ACTUATION: M = Manual S = Screwdriver					
CU ASSEMBLY / VALVE TYPE: CU = directly on double-acting cylinders / unidirectional VU = directly on valves / unidirectional CO = directly on valves exhaust / bidirectional					
7 VERSIONS: 6 = needle (screwdriver operated) 7 = needle (manual operated)					
02 NOMINAL DIAMETER: 02 = ø 1,5 max 04 = ø 2 max 06 = ø 4 max 08 = ø 7 max 10 = ø 12 max					
M5 PORTS: M5 = M5 1/8 = G1/8 1/4 = G1/4 3/8 = G3/8 1/2 = G1/2					

Silenced exhaust controllers

Mod. SCO + 2905
The flow control valve Mod. SCO and the silencer Mod. 2905 are supplied separately


Mod. SCO 602-M5+2905 M5
SCO 604-1/8+2905 1/8
SCO 606-1/4+2905 1/4

Series RSW
Ports G1/8, G1/4 and G1/2


Mod. RSW 1/8
RSW 1/4
RSW 3/8
RSW 1/2

Series PSCU, PMCU, PSVU, PMVU, PSCO and PMCO flow control valves

Unidirectional and bidirectional flow regulators with ports M5, G1/8, G1/4, G3/8 and banjo in brass (port M5) or in technopolymer (ports G1/8, G1/4, G3/8)

Types	
	PSCU PMCU
	PSVU PMVU
	PSCO PMCO

PSCU - PMCU = direct assembly on cylinders
PSVU - PMVU = direct assembly on valves
PSCO - PMCO = direct assembly on cylinders or valves

2

CONTROL


CODING EXAMPLE									
P	M	CU		7	04	-	1/8	-	4
P	SERIES								
M	ACTUATION: M = Manual S = Screwdriver								
CU	ASSEMBLY: CU = on cylinders unidirectional VU = on valves unidirectional CO = bidirectional								
7	VERSIONS: 6 = needle (screwdriver operated) 7 = needle (manual operated)								
04	NOMINAL DIAMETER: 02 = Ø 1.5 MAX 04 = Ø 2 MAX 06 = Ø 4 MAX 08 = Ø 7 MAX								
1/8	PORTS: M5 = M5 1/8 = G1/8 1/4 = G1/4 3/8 = G3/8								
4	TUBE: 4 = Ø 4 6 = Ø 6 8 = Ø 8 10 = Ø 10 12 = Ø 12								

Series TMCU, TMVU and TMCO flow control valves


Unidirectional and bidirectional banjo flow control regulators

Nominal diameters \varnothing 2 - 3,8 - 5,8 - 8 mm

Ports G1/8, G1/4, G3/8, G1/2



Mod. **TMCU 972-1/8-4**
TMCU 974-1/8-6
TMCU 974-1/4-6
TMCU 976-1/8-8
TMCU 976-1/4-8
TMCU 976-3/8-8
TMCU 978-3/8-10
TMCU 978-1/2-10



Mod. **TMVU 972-1/8-4**
TMVU 974-1/8-6
TMVU 974-1/4-6
TMVU 976-1/8-8
TMVU 976-1/4-8
TMVU 976-3/8-8
TMVU 978-3/8-10
TMVU 978-1/2-10



Mod. **TMCO 972-1/8-4**
TMCO 974-1/8-6
TMCO 974-1/4-6
TMCO 976-1/8-8
TMCO 976-1/4-8
TMCO 976-3/8-8
TMCO 978-3/8-10
TMCO 978-1/2-10

CODING EXAMPLE

TM	CU		9	74	-	1/8	-	6
-----------	-----------	--	----------	-----------	----------	------------	----------	----------

TM ACTUATION:
TM = manual

CU ASSEMBLY:
CU = on cylinders unidirectional
VU = on valves unidirectional
CO = bidirectional

9 VERSIONS:
9 = manual needle

74 REGULATION:

	step	\varnothing tube
72 =	2	4
74 =	3.8	6
76 =	5.8	8
78 =	8	10

1/8 PORTS:
1/8 = G1/8
1/4 = G1/4
3/8 = G3/8
1/2 = G1/2


6 TUBE:
4 = \varnothing 4 mm
6 = \varnothing 6 mm
8 = \varnothing 8 mm
10 = \varnothing 10 mm

Series GSCU, GMCU, GSVU, GMVU, GSCO and GMCO flow control valves

Unidirectional and bidirectional banjo flow control regulators

Nominal diameters 1,5 - 3,5 - 5 mm

Ports M5, G1/8, G1/4



Mod. GSCU 813-M5-3
GSCU 814-M5-4
GSCU 803-1/8-6
GSCU 804-1/8-8
GSCU 805-1/4-8
GSCU 806-1/4-10



Mod. GMCU 913-M5-3
GMCU 914-M5-4
GMCU 903-1/8-6
GMCU 904-1/8-8
GMCU 905-1/4-8
GMCU 906-1/4-10



Mod. GSVU 813-M5-3
GSVU 814-M5-4
GSVU 803-1/8-6
GSVU 804-1/8-8
GSVU 805-1/4-8
GSVU 806-1/4-10



Mod. GMVU 913-M5-3
GMVU 914-M5-4
GMVU 903-1/8-6
GMVU 904-1/8-8
GMVU 905-1/4-8
GMVU 906-1/4-10



Mod. GSCO 813-M5-3
GSCO 814-M5-4
GSCO 803-1/8-6
GSCO 804-1/8-8
GSCO 805-1/4-8
GSCO 806-1/4-10



Mod. GMCO 913-M5-3
GMCO 914-M5-4
GMCO 903-1/8-6
GMCO 904-1/8-8
GMCO 905-1/4-8
GMCO 906-1/4-10

CODING EXAMPLE

GM	CU		9	03	-	1/8	-	6
----	----	--	---	----	---	-----	---	---

GM ACTUATION:
GM = manual
GS = screwdriver

CU ASSEMBLY:
CU = on cylinders unidirectional
VU = on valves unidirectional
CO = bidirectional

9 VERSIONS:
8 = needle (screwdriver operated)
9 = needle (manually operated)

03 FLOW CONTROL RANGE:

	size	ø tube
13 =	1.5	3
14 =	1.5	4
03 =	3.5	6
04 =	3.5	8
05 =	5	8
06 =	5	10

1/8 PORTS:
M5 = M5
1/8 = G1/8
1/4 = G1/4

6 TUBE:
3
4 = ø 4 mm
6 = ø 6 mm
8 = ø 8 mm
10 = ø 10 mm

Series RFU and RFO flow control valves

Unidirectional and bidirectional flow control valves

Ports: M5, G1/8, G1/4, G3/8, G1/2

Nominal diameters M5 = 1,5 mm; G1/8 = 2 and 3 mm; G1/4 = 4 and 6 mm; G3/8 and G1/2 = 7 mm



Mod. RFU 452-M5
RFU 482-1/8
RFU 483-1/8
RFU 444-1/4
RFU 446-1/4
RFU 467-3/8
RFU 477-1/2



Mod. RFO 352-M5
RFO 382-1/8
RFO 383-1/8
RFO 344-1/4
RFO 346-1/4
RFO 367-3/8
RFO 377-1/2

CODING EXAMPLE

RF	U		4	8	2	-	1/8
----	---	--	---	---	---	---	-----

RF SERIES

U 4 FUNCTION:
U 4 = unidirectional
O 3 = bidirectional

8 PORTS:
4 = G1/4
5 = M5
6 = G3/8
7 = G1/2
8 = G1/8

2 FLOW CONTROL RANGE:
2 = \varnothing 1.5 mm max (for ports M5)
 \varnothing 2 mm max (for ports 1/8 only)
3 = \varnothing 3 mm max (for ports 1/8 only)
4 = \varnothing 4 mm max (for ports 1/4 only)
6 = \varnothing 6 mm max (for ports 1/4 only)
7 = \varnothing 7 mm max (for ports 3/8, 1/2 only)

1/8 PORTS:
M5
1/8
1/4
3/8
1/2

Series 28 flow control valves

Bidirectional flow control valves

Ports G1/8, G1/4, G3/8, G1/2



Mod. 2810 1/8
2810 1/4
2810 3/8
2810 1/2



Mod. 2820 1/8
2820 1/4
2820 3/8
2820 1/2



Mod. 2830 1/8
2830 1/4
2830 3/8
2830 1/2



Mod. 2819 1/8
2819 1/4



Mod. 2829 1/8
2829 1/4



Mod. 2839 1/8
2839 1/4
2839 3/8
2839 1/2

Pressure switches, transducers and pressure indicators

Series PM adjustable-diaphragm pressure switches, with setting visual scale, with exchange contacts

Series TRP electro-pneumatic transducers

Series 2950 pressure indicators, ports M5

Series PM adjustable-diaphragm pressure switches
Normally closed (NC) or normally open (NO)
Ports G1/8




Mod. **PM11-NC**

NC = The pressure switch opens an electric contact when it reaches the fixed pressure



Mod. **PM11-NA**

NO = The pressure switch closes an electric contact when it reaches the fixed pressure

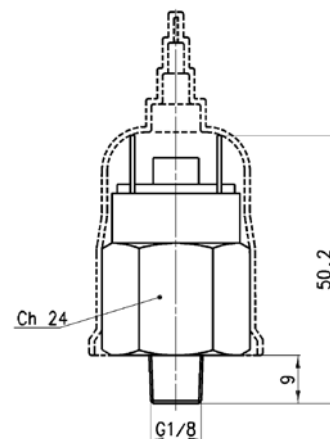


Series PM681-... pressure switches with setting visual scale
In compliance with EN60730 standards
Electric connection: PVC cable 2 x 0.22 mm
Electric contact: Reed SPST NO
Body in anodized aluminium and threaded fitting in brass
Hysteresis: 0.8 bar max




Mod. **PM681-1**
PM681-3

Series PM pressure switch with exchange contacts



Mod. **PM11-SC**

Series TRP transducer is particularly suitable to convert a pneumatic signal into an electrical signal. The contacts are NC (normally closed) or NO (normally open), thus making it possible to generate or eliminate current when the pneumatic signal is present
Minimum operating pressure 2,5 bar



Mod. **TRP-8**

The pressure indicator Mod. 2950-M5 is passive element (no spring, red colour)
It is useful for detecting pressure manually without having to remove the connections



Mod. **2950 M5**

Three-pole connector for pressure switch Mod. PM11-SC



Mod. **124-830**
124-830EX (ATEX version)

Series SWM electronic miniature vacuum switches

These vacuum switches are used in measuring ranges between -1 and 0 bar



Mod.
SWM-VA0-M5
SWM-VA0-T6
SWM-VD6-M5
SWM-VD6-T6

CODING EXAMPLE

SW	M	-	VA0	-	T6
----	---	---	-----	---	----

SW SERIES:
SW = transducer

M VERSION:
m = Micro

VA0 OUTPUT SIGNAL:
VA0 = analog output
VD6 = digital output with switching point set to -600 mbar

T 6 CONNECTION:
T6 = with diam. 6 mm plung in tube
M5 = male thread M5

Series SWE electronic vacuum/pressure switches

Running out of stock

These vacuum sensors are available with analog and digital output



Mod.
SWE-V00 PA
SWE-U10-PA

CODING EXAMPLE

SW	E	-	V00	-	P	A
----	---	---	-----	---	---	---

SW SERIES:
SW = transducer

E VERSION:
E = electronic

V00 MEASUREMENT RANGE:
V00 = from -1 to 0 bar
U10 = from -1 to 10 bar (for version E only)

P POLARITY:
P = PNP

A PNEUMATIC CONNECTION:
A = external G1/8 male thread and internal M5 female thread

Series SWD electronic vacuum/pressure switches

With digital display
High precision, easy to use



Mod.
SWD-V00-PA
SWD-P10-PA

CODING EXAMPLE

SW	D	-	V00	-	P	A
----	---	---	-----	---	---	---

SW SERIES:
SW = transducer

D VERSION:
D = electronic with digital display

V00 MEASURING RANGE:
V00 = from -1 to 0 bar
P10 = from 0 to 10 bar

P POLARITY:
P = PNP

A PNEUMATIC CONNECTION:
A = G1/8 male thread and M5 female thread

Series SWDN electronic vacuum/pressure switches

With digital display
High precision, easy to use



CODING EXAMPLE

SWDN	-	V01	-	P3	-	2
------	---	-----	---	----	---	---

SWDN SERIES

V01

SET PRESSURE RANGE:
V01 = from -1 bar to 1 bar
P10 = from 0 bar to 10 bar

P3

TYPE OF ELECTRIC CONNECTION:
P3 = 2 PNP outputs + 1 analog output 1 - 5 V DC
(this version is available with 5-pole cable only)
P4 = 2 PNP outputs

2

ELECTRIC CONNECTION:
2 = cable of 2 meters
M = M8 4 pin connector

Series SWC electronic vacuum/pressure switches

With digital display
High precision, easy to use



CODING EXAMPLE

SW	C	-	V00	-	P
----	---	---	-----	---	---

SW

SERIES:
SW = transducer

C

VERSION:
C = cube shape with digital display

V00

MEASURING RANGE:
V00 = from -1 to 0 bar
P10 = from 0 to 10 bar

P

POLARITY:
P = PNP

Series SWCN electronic vacuum/pressure switches

With digital display
High precision, easy to use



CODING EXAMPLE

SWCN	-	V01	-	P3	-	2
------	---	-----	---	----	---	---

SWCN SERIES

V01

SET PRESSURE RANGE:
V01 = from -1 bar to 1 bar
P10 = from 0 bar to 10 bar

P3

TYPE OF ELECTRIC CONNECTION:
P3 = 2 PNP outputs + 1 analog output 1 - 5 V DC
(this version is available with 5-pole cable only)
P4 = 2 PNP outputs

2

ELECTRIC CONNECTION:
2 = cable of 2 meters
M = M8 4 pin connector

Accessories

Circular M8 4-pole connectors, Female for Series SWE - SWD - SWDN - SWC - SWCN

With PU sheathing, non shielded cable
Protection class: IP65

Mod. **CS-DF04EG-E200** (cable 2 m)
CS-DF04EG-E500 (cable 5 m)
CS-DR04EG-E200 (cable 2 m)
CS-DR04EG-E500 (cable 5 m)




2

CONTROL

Bracket for Series SWC

The bracket is delivered complete with fixing screws and O-ring seal
Mod. **SWC-E**



Bracket for Series SWC

Mod. **SWC-B**



Panel mounting bracket for Series SWC

Mod. **SWC-F**



Mounting bracket for Series SWCN

Mod. **SWCN-B**



Panel mounting set for Series SWCN

Mod. **SWCN-F**




Panel mounting set + transparent cover for Series SWCN

Mod. **SWCN-FP**



Series 2901, 2903, 2921, 2931, 2938, 2939, 2905 and RSW silencers

Ports: M5, G1/8, G1/4, G3/8, G1/2, G3/4, G1



Mod. 2901 1/8
2901 1/4-17
2901 1/4-22
2901 3/8
2901 1/2
2901 3/4
2901 1



Mod. 2903 1/8



Mod. 2921 1/8
2921 1/4
2921 3/8
2921 1/2
2921 3/4
2921 1



Mod. 2931 M5
2931 M7
2931 1/8
2931 1/4
2931 3/8
2931 1/2
2931 3/4
2931 1



Mod. 2938 M5
2938 1/8
2938 1/4
2938 3/8
2938 1/2



Mod. 2939 4
2939 6
2939 8
2939 10

Series 2905 silencing bush
For flow control valves Mod. SCO and MCO



Mod. 2905 1/8
2905 1/4
2905 3/8

Series AP directly operated proportional valves

New models

2/2-way proportional valves

Normally closed (NC). Sizes: 16, 22 mm

Bodies with rear and lower flanges

Size 16 mm



Mod. **AP-6210-DR2-GP***
AP-6210-FR2-GP*
AP-6210-HR2-GP*
AP-6210-LR2-GP*
AP-6210-DW2-GP*OX2
AP-6210-FW2-GP*OX2
AP-6210-HW2-GP*OX2
AP-6210-LW2-GP*OX2

Size 16 mm with lower flanges



Mod. **AP-6215-DR2-GP***
AP-6215-FR2-GP*
AP-6215-HR2-GP*
AP-6215-LR2-GP*
AP-6215-DW2-GP*OX2
AP-6215-FW2-GP*OX2
AP-6215-HW2-GP*OX2
AP-6215-LW2-GP*OX2

Size 16 mm with rear flanges



Mod. **AP-6214-DR2-GP***
AP-6214-FR2-GP*
AP-6214-HR2-GP*
AP-6214-LR2-GP*
AP-6214-DW2-GP*OX2
AP-6214-FW2-GP*OX2
AP-6214-HW2-GP*OX2
AP-6214-LW2-GP*OX2

Size 22 mm



Mod. **AP-7211-FR2-U7***
AP-7211-HR2-U7*
AP-7211-LR2-U7*
AP-7211-NR2-U7*
AP-7211-QR2-U7*
AP-7211-FW2-U7*OX2
AP-7211-HW2-U7*OX2
AP-7211-LW2-U7*OX2
AP-7211-NW2-U7*OX2
AP-7211-QW2-U7*OX2

Size 22 mm with lower flanges



Mod. **AP-7215-FR2-U7***
AP-7215-HR2-U7*
AP-7215-LR2-U7*
AP-7215-NR2-U7*
AP-7215-QR2-U7*
AP-7215-FW2-U7*OX2
AP-7215-HW2-U7*OX2
AP-7215-LW2-U7*OX2
AP-7215-NW2-U7*OX2
AP-7215-QW2-U7*OX2

Size 16 mm with body in PVDF



Mod. **AP-621L-DR3-GP***
AP-621L-FR3-GP*
AP-621L-HR3-GP*
AP-621L-LR3-GP*
AP-621L-DW3-U7*OX2
AP-621L-FW3-U7*OX2
AP-621L-HW3-U7*OX2
AP-621L-LW3-U7*OX2

* = choose the desired voltage

CODING EXAMPLE

AP	-	7	2	1	1	-	L	R	2	-	U	7	11	OX2
----	---	---	---	---	---	---	---	---	---	---	---	---	----	-----

AP	SERIES													
7	BODY: 6 = Size 16 mm - 7 = Size 22 mm													
2	NUMBER OF WAYS: 2 = 2-way													
1	VALVE FUNCTION: 1 = NC													
1	PORTS: 0 = M5 (size 16 mm only) 1 = G1/8 (size 22 mm only) L = male hose adaptor (for body in PVDF only, size 16 mm) 4 = with rear flange 5 = with lower flange													
L	NOMINAL DIAMETER: D = 0.8 mm (for size 16 mm only) F = 1 mm H = 1.2 mm L = 1.6 mm N = 2 mm (for size 22 mm only) Q = 2.4 mm (for size 22 mm only)													
R	SEALS MATERIAL: R = NBR - W = FKM													
2	BODY MATERIAL: 2 = OT - 3 = PVDF (for size 16 mm only)													
U	ENCAPSULATING MATERIAL: G = PA (for size 16 mm only) - U = PET (for size 22 mm only)													
7	SOLENOID DIMENSIONS: P = 16x26 DIN EN 175301-803-C (for size 16 mm only) - 7 = 22x22 DIN 43650 B (for size 22 mm only)													
11	SOLENOID VOLTAGE: H = 12 V DC 3 W (for size 16 mm only) 7 = 24 V DC 3 W (for size 16 mm only) 11 = 24 V DC 6.5 W (for size 22 mm only) 12 = 12 V DC 6.5 W (for size 22 mm only)													
OX2	VERSION: OX2 = version with ASTM G93-03 Certification Level B (FKM seals only) = non-certified NBR version													

Connectors for Series AP directly operated proportional valves

Connectors DIN 43650, pin spacing 9,4 mm
for size 16 mm only
Mod. **125-800**



Connectors DIN 43650,
pin spacing 9,4 mm with cable
for size 16 mm only
Mod. **125-550-1** (cable 1000 mm)



In-line connectors with moulded cable
for size 16 mm only
Mod. **125-553-2** (cable 2000 mm)
125-553-5 (cable 5000 mm)



Connectors DIN 43650
for size 22 mm only
Mod. **122-800**
122-800EX *
* only for ATEX certified
solenoids mod. U7*EX,
with anti-screwing off screw
mod. TORX



Connectors DIN 43650 with cable
for size 22 mm only
Mod. **122-550-1** (cable 1000 mm)
122-550-5 (cable 5000 mm)



Connectors DIN 43650
Mod. **124-800**



2

Series CP directly operated proportional solenoid valves

New models

2/2 NC proportional valves
Sizes: 16 and 20 mm

CONTROL

Size 16 mm



Mod. **CP-C621-FW2-0P1**
CP-C621-GW2-0P1
CP-C621-NW2-0P1
CP-C621-FW2-0P3
CP-C621-GW2-0P3
CP-C621-NW2-0P3
CP-C621-FW2-0P5
CP-C621-GW2-0P5
CP-C621-NW2-0P5

Size 20 mm



Mod. **CP-C721-MW2-072**
CP-C721-MW2-074
CP-C721-MW2-076
CP-C721-PW2-072
CP-C721-PW2-074
CP-C721-PW2-076

CODING EXAMPLE

CP	-	C	6	2	1	-	G	W	2	-	0	P	3
----	---	---	---	---	---	---	---	---	---	---	---	---	---

CP SERIES

C PORTS:
C = cartridge - S = subbase

6 BODY SIZE:
6 = 16 mm - 7 = 20 mm

2 NUMBER OF PORTS:
2 = 2-way

1 FUNCTION:
1 = NC

G ORIFICE DIAMETRES:
F = 1 mm
G = 1.5 mm
N = 2 mm
M = 3 mm
P = 3.5 mm

W GASKETS MATERIAL:
W = FKM

2 BODY MATERIAL:
2 = brass

0 OVERMOULDING MATERIAL OF COIL:
0 = cartridge

P DIMENSIONS OF THE COIL:
P = ø 16 - 7 = ø 20

5 VOLTAGE:
1 = 6 V DC 3.1 W (size 16 mm only)
5 = 11 V DC 3.1 W (size 16 mm only)
3 = 24 V DC 3.1 W (size 16 mm only)
6 = 6 V DC 4.3 W (size 20 mm only)
2 = 12 V DC 4.3 W (size 20 mm only)
4 = 24 V DC 4.3 W (size 20 mm only)
7 = 6 V 4.8 W (only ø 3.5, size 20 mm)
8 = 12 V 4.8 W (only ø 3.5, size 20 mm)
9 = 24 V 4.8 W (only ø 3.5, size 20 mm)

Series 130 electronic control device for proportional valves

PWM control device, with current control system for directly operated proportional valves



CODING EXAMPLE

130	-	2	2	2
130	SERIES			
2	VOLTAGE: 2 = 24 V DC (max power 24 W) 3 = 12 V DC (max power 12 W) 4 = 6 V DC (max power 6 W) 5 = 11 V DC (max power 11 W)			
2	POWER: 1 = 3 W 2 = 6.5 W 3 = 3.2 W 4 = 4.3 W 5 = 10 W			
2	PWM FREQUENCY: 2 = 500 Hz 3 = 1 KHz			

NOTE: it is possible to realize configurations with voltage, power and PWM frequency values that are not yet foreseen in the coding example.
For further information we suggest you to contact our technical department.

Connectors

Connector DIN 43650
pin spacing 9,4 mm
Mod. **125-800**



Connector DIN 43650 (PG)
Mod. **122-800**



Series LR analogic proportional servo valves

Running out of stock

Flow control - LRWA0
3/3-way servo valves



Flow control - LRWA2
3/3-way directly operated servo valves



Flow control - LRWA4
3/3-way servo valves



Pressure control - LRPA4
3/3-way servo valves (ø 4-6 mm)
Selectable sensor range



Positioning control of pneumatic cylinders - LRXA4
3/3-way servo valves



2

CONTROL

CODING EXAMPLE

L	R	W	A	0	-	3	4	-	1	-	A	-	05
---	---	---	---	---	---	---	---	---	---	---	---	---	----

L SERIES:
L = proportional servo valves

R TECHNOLOGY:
R = rotating spool

W VERSION:
W = flow control - P = pressure control - X = position control

A ELECTRONICS:
A = analogic

0 MODEL:
0 = cartridge with fixation slot - 2 = compact DIN-RAIL - 4 = with sub-base

3 FUNCTION:
3 = 3 way

4 DIAMETER:
4 = 4 mm - 6 = 6 mm

1 INPUT SIGNAL:
1 = +/- 10 V (LRWA only) - 2 = 0-10 V - 3 = 0-20 mA - 4 = +/- 5 V (LRWA only) - 5 = 4-20 mA (LRPA4 and LRXA4 only)

A FEEDBACK SIGNAL:
A = internal encoder (LRWA only)
B = 1 bar integrated pressure sensor (LRPA4 only)
C = 2.5 bar integrated pressure sensor (LRPA4 only)
D = 10 bar integrated pressure sensor (LRPA4 only)
2 = 0-10 V external transducer (LRPA4 only)
3 = 0-20 mA external transducer (LRPA4 only)
4 = 0-5 V (LRXA4 only)
5 = 4-20 mA external transducer (LRPA4 only)

05 CABLE:
05 = 0,5 m (no LRWA0) - 00 = no cable (LRWA0 only) - 10 = 1 m (LRWA0 only) - 20 = 2 m (LRWA0 only)

Accessories

For Series LRWA0 only
Mod. LRA0C-3



Male connector
M16 4 pin
Mod. CS-PM04CB



Male connector
M16 7 pin
Mod. CS-PM07CB



Female connector
M16 7 pin
Mod. CS-PF07CB



Connectors with cable
Mod. CS-LF05HB-D200 (cable 2 m)
CS-LF05HB-D500 (cable 5 m)
CS-LR05HB-D200 (cable 2 m)
CS-LR05HB-D500 (cable 5 m)



Series LR digital proportional servo valves

3/3-way directly operated servo valves for the flow (LRWD2), pressure (LRPD2) and position (LRXD2) control



CODING EXAMPLE

L	R	W	D	2	-	3	4	-	1	-	A	-	00
L	SERIES: L = proportional servo valves												
R	TECHNOLOGY: R = rotating spool												
W	VERSION: W = flow control - P = pressure - X = position control												
D	ELECTRONICS: D = digital												
2	MODEL: 2 = compact DIN-RAIL (LRWD, LRPD) - 4 = with subbase (LRXD only)												
3	FUNCTION: 3 = 3/3-way												
4	NOMINAL DIAMETER: 4 = 4 mm - 6 = 6 mm												
1	INPUT COMMAND SIGNAL: 1 = +/- 10 V (LRWD, LRPD) - 2 = 0-10 V - 3 = 0-20 mA (LRXD only) - 5 = 4-20 mA												
A	FEEDBACK SIGNAL: A = internal encoder (LRWD only) 4 = 0 - 5 V (LRXD only) Sensor SIGNAL or External signal (LRPD only): 2 = 0..10 V 4 = 0 - 5 V 5 = 4..20mA B = 1 bar INTERNAL D = 10 bar INTERNAL E = 250 mbar INTERNAL F = +/-1 bar INTERNAL												
00	CABLE LENGTH: 00 = no cable												

Accessories

Fixing foot

Supplied with:
2x feet
4x screws
Mod. **LRWDB**



Mounting brackets for DIN-rail

DIN EN 50022 (7,5mm x 35mm - width 1)
Supplied with:
2x mounting brackets
2x screws M4x6 UNI 5931
2x nuts
Mod. **PCF-EN531**



Data line tee

Connection valve-PLC-external transducer
Mod. **CS-AA08EC**



Straight female connector M12 8 poles

For electric supply and commands
Mod. **CS-LF08HC** (cable 2 m)



Cable with straight female connector M12 8 poles

For electrical supply and commands
Mod. **CS-LF08HB-C200** (cable 2 m)
CS-LF08HB-C500 (cable 5 m)




Cable with angular (90°) female connector M12 8 poles

For electric supply and commands
Mod. **CS-LR08HB-C200** (cable 2 m)
CS-LR08HB-C500 (cable 5 m)



Series K8P electronic proportional micro regulator

Proportional regulator for the pressure control



Mod. K8P-0-D5*2-0
K8P-0-E5*2-0
K8P-L-E5*2-0
K8P-L-D5*2-0
K8P-S-D5*2-0
K8P-S-E5*2-0
K8P-T-D5*2-0
K8P-T-E5*2-0

* = according to the desired command, put: 2 (0-10 V DC) or 3 (4-20 mA)

2

CONTROL

CODING EXAMPLE

K8P	-	0	-	D	5	2	2	-	0
-----	---	---	---	---	---	---	---	---	---

K8P

SERIES

0

BODY DESIGN:

0 = Stand alone - S = Standard Sub-base - L = Light Sub-base - T = Light Sub-base for the pressure remote reading

D

WORKING PRESSURE:

D = 0 - 10 bar - E = 0 - 3 bar

5

VALVE FUNCTIONS:

5 = 2-way NC

2

COMMAND:

2 = 0-10 V DC - 3 = 4-20 mA

2

OUTPUT SIGNAL:

2 = 0-10 V

0

CABLE LENGTH:

0 = without cable - 2F = straight cable, 2 m - 2R = right angle cable (90 degrees), 2 m - 5F = straight cable, 5 m - 5R = right angle cable (90 degrees), 5 m

APPLICATIONS

The K8P proportional regulator can be used as a pilot valve to control the opening of high flow valves or to check the high flow pressure regulators proportionally (version with sub-base for the pressure remote reading). It enables proportional control of power in lifting systems and can be used with inert gas to maintain a constant pressure in pneumatic cylinders or expansion valve chambers. It has also been designed to maintain a constant pressure during the pulling power applied to the wires in winding machines, to modulate pressure during the smoothing process in woodworking machines or to adjust the opening of diaphragm valves.

Accessories

Standard Sub-base

Note: the use of a silencer on the exhaust is recommended *

* = Mod. 2939 4

Mod. K8P-AS



Light Sub-base

Note: the use of a silencer on the exhaust is recommended *

* = Mod. 2931 M5

2938 M5

2901 M5

Mod. K8P-AL



Light Sub-base for the pressure remote reading

Note: the use of a silencer on the exhaust is recommended *

* = Mod. 2931 M5

2938 M5

2901 M5

In the version Light sub-base for the pressure remote reading it is also possible to use the fixing bracket B2-E531

Mod. K8P-AT



Mounting brackets for DIN rail

DIN EN 50022 (7,5 mm x 35 mm - width 1)

Supplied with:

1x plates

1x screws M4x6 UNI 5931

Note: this accessory cannot be used with the Light sub-base version.

Mod. PCF-K8P



Bracket for horizontal mounting, for standard sub-base

Supplied with:

1x mounting bracket

2x screws M3x8 UNI 5931

Mod. K8P-B1



Circular M8 4-pole connectors, Female

With PU sheathing, non shielded cable
Protection class: IP65

Mod. CS-DF04EG-E200 (cable 2 m)

CS-DF04EG-E500 (cable 5 m)

CS-DR04EG-E200 (cable 2 m)

CS-DR04EG-E500 (cable 5 m)



Series MX-PRO electronic proportional regulator

Ports: G1/2

Manifold ports: G1/2

Modular - Available with built-in pressure gauges or ports for gauges



CODING EXAMPLE

MX	2	-	1/2	-	R	CV	2	0	4	-	LH
----	---	---	-----	---	---	----	---	---	---	---	----

MX

SERIES

2

SIZE:
2 = G1/2

1/2

PORTS:
1/2 = G1/2

R

TYPE OF REGULATOR:

R = pressure regulator - M = Manifold pressure regulator (G1/2 only)

CV

COMMAND:

CV = electrical command 0-10 V DC - CA = electrical command 4-20 mA

EV = electrical command 0-10 V DC with external servo pilot supply - EA = electrical command 4-20 mA with external servo pilot supply

2

OPERATING PRESSURE (1 bar = 14,5 psi):
1 = 0.15 ÷ 3 bar - 2 = 0.5 ÷ 10 bar (standard)

0

DESIGN TYPE:

0 = relieving (standard) - 1 = without relieving

4

PRESSURE GAUGE:

0 = without pressure gauge (with threaded port for gauges) - 2 = with built-in pressure gauge 0-6 and working pressure 0.15 ÷ 3 bar
4 = with built-in pressure gauge 0-12 and working pressure 0.5 ÷ 10 bar (standard)

LH

FLOW DIRECTION:

= from left to right (standard) - LH = from right to left

For the assembly of a single component with fixing flanges or wall-mounting, see the section "FRL Series MX Assembled" in the chapter 3

Accessories

Rapid clamp kit Mod. MX2-...

Kit MX2-X supplied with: 1 rapid clamp, 1 O-ring OR 3125 *,
2 exagonal nuts M5, 2 screws M5x69

Kit MX2-Z supplied with: 1 rapid clamp, 1 O-ring OR 3125 *,
1 exagonal nut M5, 1 screw M5x69, 1 screw M5x85 for wall fixing

* it can be ordered separately (cod. 160-39-11/19)

Materials: technopolymer clamp,

NBR O-ring, zinc-plated steel nuts and screws

Mod.

MX2-X
MX2-Z


Rapid clamp kit with wall fixing brackets for Series MX - size 2

The kit MX2-Y is supplied with:

1 wall rapid clamp, 1 O-ring OR 3125 **,

2 exagonal nuts M5, 2 screws M5x69

** = it can be separately ordered (cod. 160-39-11/19)

Materials: technopolymer clamp, NBR O-ring,

zinc-plated steel nuts and screws

Mod.

MX2-Y


Terminal flanges (IN/OUT)

The kit is supplied with: 1 flange INLET side, 1 flange OUTLET side

Materials: painted aluminium flanges

Mod.

MX2-3/8-FL
MX2-1/2-FL
MX2-3/4-FL


Rapid clamps kit + flanges

The kit is supplied with:

MX2-3/8-HH 1x MX2-3/8-FL + 2x MX2-X

MX2-1/2-HH 1x MX2-1/2-FL + 2x MX2-X

MX2-3/4-HH 1x MX2-3/4-FL + 2x MX2-X

MX2-3/8-JJ 1x MX2-3/8-FL + 2x MX2-Z

MX2-1/2-JJ 1x MX2-1/2-FL + 2x MX2-Z

MX2-3/4-JJ 1x MX2-3/4-FL + 2x MX2-Z


Rapid clamps kit with wall fixing brackets + flanges

The kit is supplied with:

MX2-3/8-KK 1x MX2-3/8-FL + 2x MX2-Y

MX2-1/2-KK 1x MX2-1/2-FL + 2x MX2-Y

MX2-3/4-KK 1x MX2-3/4-FL + 2x MX2-Y


Block for pressure gauge fixing

The kit is supplied with:

1 block, 1 grain, 2 screws, 1 seal

Mod.

MX2-R26-P


O-ring for assembly


Mod.

160-39-11/19 (O-ring OR 3125)



Series ER100 and ER200 digital electro-pneumatic regulators

Series ER100 ports: G1/4

Series ER200 ports: G1/4, G3/8



Mod. ER104-50AP
ER104-50SP
ER104-52AP
ER104-52SP
ER104-5PSP
ER104-90AP
ER104-90SP
ER104-92AP
ER104-92SP
ER104-9PSP



Mod. ER238-50AP
ER238-50SP
ER238-52AP
ER238-52SP
ER238-5PSP
ER238-90AP
ER238-90SP
ER238-92AP
ER238-92SP
ER238-9PSP

2

CONTROL

CODING EXAMPLE

ER	1	04	-	5	0	AN
----	---	----	---	---	---	----

ER SERIES

1 SIZE:
1 = size 1 - 2 = size 2

04 PORT:
04 = G1/4 - 38 = G3/8 (size 2 only)

5 WORKING PRESSURE:
5 = 0 ÷ 5 bar
9 = 0.5 ÷ 9 bar

0 INPUT:
0 = 0 - 10 V DC
1 = 0 - 5 V DC
2 = 4 - 20 mA
P = Parallel 10 bit

AN OUTPUT:
AN = 1 - 5 V analog, error (NPN)
AP = 1 - 5 V analog, error (PNP)
SN = switch (NPN), error (NPN)
SP = switch (PNP), error (PNP)

Accessories

**Bracket for Series ER100
floor installation**
Mod. ER1-B1



**Bracket for Series ER100
wall installation**
Mod. ER1-B2



**Bracket for Series ER200
floor installation**
Mod. ER2-B1



**Bracket for Series ER200
wall installation**
Mod. ER2-B2



**Cable and connector
for Series ER200 regulator
with analog Input**
Mod. G8X1-1
G8X1-3













**Cable and connector
for Series ER200 regulator
with parallel Input**
Mod. G8X2-1
G8X2-3













3 > Treatment













Series MD Modular FRL Units

		Page
Series MD	 Filters	137
Ports with interchangeable cartridges: threaded (1/8, 1/4, 3/8) or integrated with super-rapid fitting for tube with ø 6, 8 and 10 mm. Modular assembly. Bowl with technopolymer cover and bayonet-type mounting		
Series MD	 Coalescing filters	137
Ports with interchangeable cartridges: threaded (1/8, 1/4, 3/8) or integrated with super-rapid fitting for tube with ø 6, 8 and 10 mm. Modular assembly. Bowl with technopolymer cover and bayonet-type mounting		
Series MD	 Activated carbon filters	138
Ports with interchangeable cartridges: threaded (1/8, 1/4, 3/8) or integrated with super-rapid fitting for tube with ø 6, 8 and 10 mm. Modular assembly. Bowl with technopolymer cover and bayonet-type mounting		
Series MD	 Pressure regulators	138
Ports with interchangeable cartridges: threaded (1/8, 1/4, 3/8) or integrated with super-rapid fitting for tube with ø 6, 8 and 10 mm. Versions: single, combined with other functions, Manifold		
Series MD	 Lubricators	139
Ports with interchangeable cartridges: threaded (1/8, 1/4, 3/8) or integrated with super-rapid fitting for tube with ø 6, 8 and 10 mm. Modular assembly. Bowl with technopolymer cover and bayonet-type mounting		
Series MD	 Filter-regulators	139
Ports with interchangeable cartridges: threaded (1/8, 1/4, 3/8) or integrated with super-rapid fitting for tube with ø 6, 8 and 10 mm. Modular assembly. Bowl with technopolymer cover and bayonet-type mounting		
Series MD	 Lockable isolation 3/2-way valves	140
Ports with interchangeable cartridges: threaded (1/8, 1/4, 3/8) or integrated with super-rapid fitting for tube with ø 6, 8 and 10 mm. Modular. Manual, electro-pneumatic, servo-pilot and pneumatic control		
Series MD	 Soft start valves	140
Ports with interchangeable cartridges: threaded (1/8, 1/4, 3/8) or integrated with super-rapid fitting for tube with ø 6, 8 and 10 mm. Modular assembly		
Series MD	 Take-off blocks	140
Ports with interchangeable cartridges: threaded (1/8, 1/4, 3/8) or integrated with super-rapid fitting for tube with ø 6, 8 and 10 mm (5-way version) Intermediate joining cartridge (3-way version)		
Series MD	 Assembled FRL	141
Ports with interchangeable cartridges: threaded (1/8, 1/4, 3/8) or integrated with super-rapid fitting for tube with ø 6, 8 and 10 mm Modular assembly		




Series MX Modular FRL Units

		Page
Series MX	 Filters	143
MX2 ports: G3/8, G1/2, G3/4 MX3 ports: G3/4, G1. Modular Bowl with technopolymer cover and bayonet-type mounting		
Series MX	 Coalescing filters	143
MX2 ports: G3/8, G1/2, G3/4 MX3 ports: G3/4, G1. Modular Bowl with technopolymer cover and bayonet-type mounting		
Series MX	 Activated carbon filters	144
MX2 ports: G3/8, G1/2, G3/4 MX3 ports: G3/4, G1. Modular Bowl with technopolymer cover and bayonet-type mounting		
Series MX	 Pressure regulators	144
MX2 ports: G3/8, G1/2, G3/4 - MX3 ports: G3/4, G1 Manifold ports: G1/2 (MX2 only). Modular Available with built-in pressure gauges or with ports for gauges		
Series MX	 Lubricators	145
MX2 ports: G3/8, G1/2, G3/4 MX3 ports: G3/4, G1. Modular Bowl with technopolymer cover and bayonet-type mounting		
Series MX	 Filter-regulators	145
MX2 ports: G3/8, G1/2, G3/4 MX3 ports: G3/4, G1. Modular Bowl with technopolymer cover and bayonet-type mounting		
Series MX	 Lockable isolation 3/2-way valves	146
MX2 ports: G3/8, G1/2, G3/4 MX3 ports: G3/4, G1. Modular Manual, electro-pneumatic, servo-pilot and pneumatic control		
Series MX	 Soft start valves	146
MX2 ports: G3/8, G1/2, G3/4 MX3 ports: G3/4, G1 Modular		
Series MX	 Take-off blocks	146
MX2 port: G1/2 MX3 port: G1 Modular		
Series MX	 Assembled FRL	147
MX2 ports: G3/8, G1/2, G3/4 MX3 ports: G3/4, G1 Assembly through rapid clamps		





Series MC Modular FRL Units

		Page
Series MC	 Filters Ports: G1/4, G3/8, G1/2 Modular Metal bowl and bayonet-type mounting	149
Series MC	 Coalescing filters Ports: G1/4, G3/8, G1/2 Modular Metal bowl and bayonet-type mounting	149
Series MC	 Pressure regulators Ports: G1/4, G3/8, G1/2 Modular	150
Series MC	 Lubricators Ports: G1/4, G3/8, G1/2 Modular With metal bowl and bayonet-type mounting	150
Series MC	 Filter-regulators Ports: G1/4, G3/8, G1/2 Modular Metal bowl and bayonet-type mounting	151
Series MC	 Lockable isolation 3/2-way valves Electropneumatic, pneumatic and manual version Modular Ports: G1/4, G3/8, G1/2	151
Series MC	 Soft start valves Ports: G1/4, G3/8, G1/2 Modular	152
Series MC	 Take-off blocks Ports: G1/4, G1/2 Modular	152
Series MC	 Assembled FRL Ports: G1/4, G3/8, G1/2	153
Series MC	 Manifold pressure regulators Ports: G1/4 Modular	153





Pressure regulators

		Page
Series CLR	 Micro pressure regulators Ports: G1/8, G1/4 Micro pressure regulators with or without banjo in technopolymer	154
Series M	 Pressure microregulators Ports: G1/8, G1/4	154
Series T	 Pressure microregulators Ports: G1/8, G1/4	155
Series PR	 Precision regulators with manual override Port: G1/4	155

FRL Units

		Page
Series N	 Filters and coalescing filters Ports: G1/8, G1/4 With screw-on transparent bowl	156
Series N	 Pressure regulators Ports: G1/8, G1/4	156
Series N	 Lubricators Ports: G1/8, G1/4 With screw-on transparent bowl	157
Series N	 Filter-regulators Ports: G1/8, G1/4 With screw-on transparent bowl	157

Accessories for the air treatment

		Pag
Series MX MC, M, N, T	 Accessories for the air treatment Systems of rapid connections designed to make the mouting easier	158
Series M043, M053, M063	 Pressure gauges Precision class CL1,6	161
Series PG	 Digital pressure gauges Possibility of a direct mounting with rear or panel connection	161
Series MX, MC, N	 Functioning condensate drains Filtering elements Semi-automatic manual drain; Automatic drain; Depressurisation drain; Depressurisation drain, protected Port 1/8 (without drain)	162

New

Series MD filters

Ports with interchangeable cartridges: threaded (1/8, 1/4, 3/8) or integrated with super-rapid fitting for tube with \varnothing 6, 8 and 10 mm. Modular assembly
Bowl with technopolymer cover and bayonet-type mounting



CODING EXAMPLE

MD	1	-	F	0	0	0	-	1/8
----	---	---	---	---	---	---	---	-----

MD SERIES

1 DIMENSION:
1 = 42 mm

F FILTER

0 FILTERING ELEMENT:
0 = 25 μ m
1 = 5 μ m

0 CONDENSATE DRAIN *:
0 = semiautomatic-manual drain
5 = automatic drain, protected depressurisation
8 = direct G1/8 exhaust

0 VISUAL BLOCKAGE INDICATOR:
0 = not present
1 = present

1/8 PORTS (IN - OUT)*:
= without cartridges
1/8 = G1/8
1/4 = G1/4
3/8 = G3/8
6 = tube \varnothing 6
8 = tube \varnothing 8
10 = tube \varnothing 10


* NOTE: if the inlet (IN) cartridge is different from the outlet (OUT) cartridge, both dimensions shall be indicated.
Example: MD1-F000-1/4-10

* = Further details about condensate drains are available at the end of this chapter

New

Series MD coalescing filters

Ports with interchangeable cartridges: threaded (1/8, 1/4, 3/8) or integrated with super-rapid fitting for tube with \varnothing 6, 8 and 10 mm. Modular assembly
Bowl with technopolymer cover and bayonet-type mounting

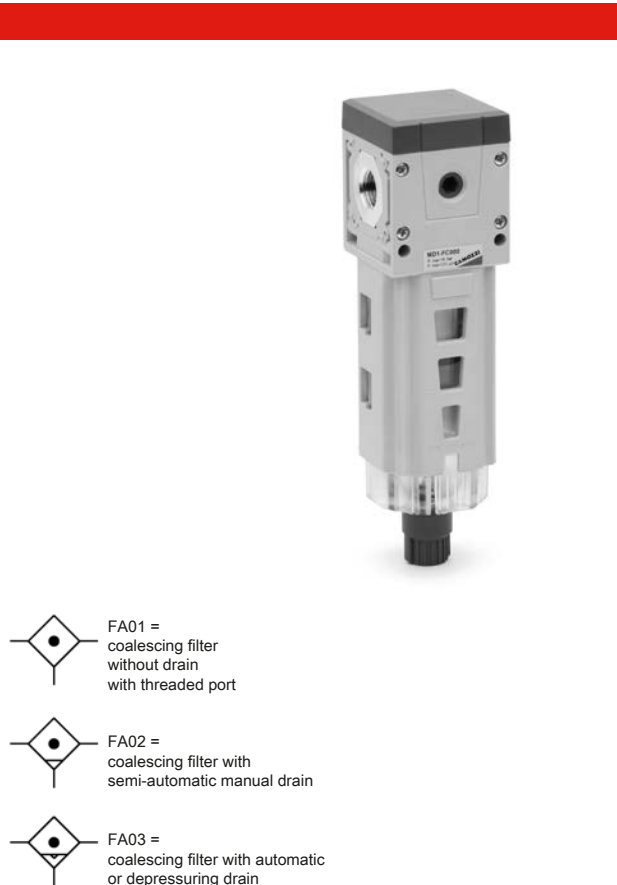

CODING EXAMPLE

MD	1	-	FC	0	0	0	-	1/8
----	---	---	----	---	---	---	---	-----

MD SERIES

1 DIMENSION:
1 = 42 mm

FC COALESCING FILTER

0 FILTERING ELEMENT:
0 = 0,01 μ m
1 = 1 μ m

0 CONDENSATE DRAIN *:
0 = semiautomatic-manual drain
5 = automatic drain, protected depressurisation
8 = direct G1/8 exhaust

0 VISUAL BLOCKAGE INDICATOR:
0 = not present
1 = present

1/8 PORTS (IN - OUT)*:
= without cartridges
1/8 = G1/8
1/4 = G1/4
3/8 = G3/8
6 = tube \varnothing 6
8 = tube \varnothing 8
10 = tube \varnothing 10


* NOTE: if the inlet (IN) cartridge is different from the outlet (OUT) cartridge, both dimensions shall be indicated.
Example: MD1-FC000-1/4-10

* = Further details about condensate drains are available at the end of this chapter

Series MD activated carbon filters

New

Ports with interchangeable cartridges: threaded (1/8, 1/4, 3/8) or integrated with super-rapid fitting for tube with \varnothing 6, 8 and 10 mm. Modular assembly
Bowl with technopolymer cover and bayonet-type mounting

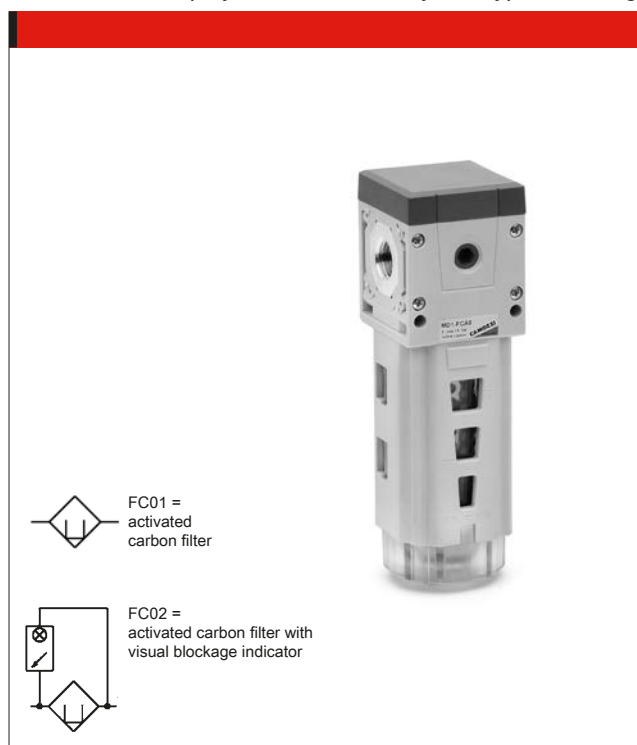

CODING EXAMPLE

MD	1	-	FCA	0	-	1/8
----	---	---	-----	---	---	-----

MD

SERIES

1

DIMENSION:
1 = 42 mm

FCA

ACTIVATED CARBON FILTER

0

VISUAL BLOCKAGE INDICATOR:
0 = not present
1 = present

1/8

PORTS (IN - OUT)*:
= without cartridges
1/8 = G1/8
1/4 = G1/4
3/8 = G3/8
6 = tube \varnothing 6
8 = tube \varnothing 8
10 = tube \varnothing 10

* NOTE: if the inlet (IN) cartridge is different from the outlet (OUT) cartridge, both dimensions shall be indicated.
Example: MD1-FCA1-1/4-10

Series MD pressure regulators

New

Ports with interchangeable cartridges: threaded (1/8, 1/4, 3/8) or integrated with super-rapid fitting for tube with \varnothing 6, 8 and 10 mm
Versions: single, combined with other functions, Manifold



CODING EXAMPLE

MD	1	-	R	T	0	0	-	1/4	-	■	-	●
----	---	---	---	---	---	---	---	-----	---	---	---	---

MD

SERIES

1

DIMENSION:
1 = 42 mm

R

TYPER OF REGULATOR:
R = pressure regulator - M = Manifold pressure regulator

T

OPERATING PRESSURE (1 bar = 14,5 psi):
0 = 0.5 ÷ 10 bar
2 = 0 ÷ 2 bar
4 = 0 ÷ 4 bar
7 = 0.5 ÷ 7 bar
T = calibrated **
B = locked **

0

DESIGN TYPE:
0 = with relieving - 1 = without relieving
2 = with relieving and by-pass valve - 3 = without relieving, with by-pass valve

0

PRESSURE GAUGE:
0 = without pressure gauge (with 1/8 port)

1/4

PORTS (IN - OUT)*:
= without cartridges
1/8 = G1/8
1/4 = G1/4
3/8 = G3/8
6 = tube \varnothing 6
8 = tube \varnothing 8
10 = tube \varnothing 10

* NOTE: if the inlet (IN) cartridge is different from the outlet (OUT) cartridge, both dimensions shall be indicated.
Example: MD1-R020-1/4-10

** NOTE: IF THE REGULATOR IS CALIBRATED OR LOCKED, AFTER THE PORTS ADD THE INLET PRESSURE "■" AND THE OUTLET PRESSURE "●"

INLET PRESSURE: ■ = enter the SUPPLY pressure value


OUTLET PRESSURE: ● = enter the OUTLET pressure value for the LOCKED regulator or the maximum value of the ADJUSTABLE pressure for the CALIBRATED regulator.

Example of a calibrated regulator with Inlet Pressure = 6.3 bar and Outlet Pressure = 4.5 bar.
Complete part number: MD1-RT00-1/4-6.3-4.5

New

Series MD lubricators

Ports with interchangeable cartridges: threaded (1/8, 1/4, 3/8) or integrated with super-rapid fitting for tube with \varnothing 6, 8 and 10 mm. Modular assembly
Bowl with technopolymer cover and bayonet-type mounting

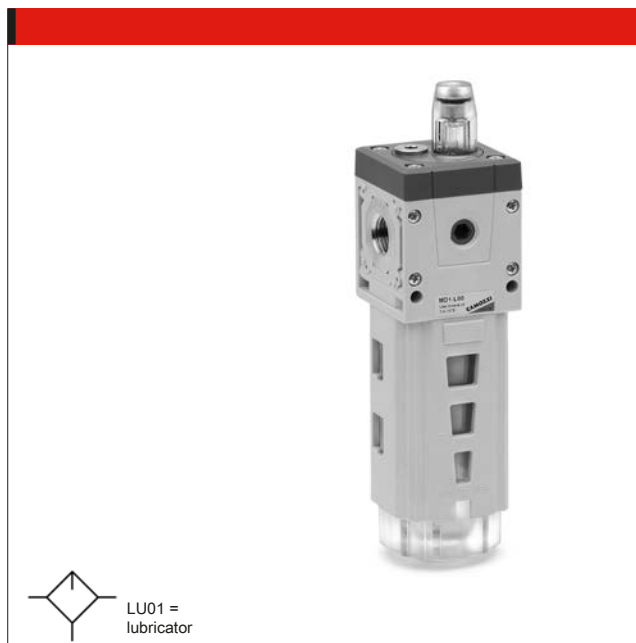

CODING EXAMPLE

MD	1	-	L	0	0	-	1/8
----	---	---	---	---	---	---	-----

MD SERIES

1 DIMENSION:
1 = 42 mm

L LUBRICATOR

00 DESIGN TYPE:
00 = oil mist with refill valve
10 = oil mist without refill valve


1/8 PORTS (IN - OUT)*:
= without ports
1/8 = G1/8
1/4 = G1/4
3/8 = G3/8
6 = tube \varnothing 6
8 = tube \varnothing 8
10 = tube \varnothing 10

* NOTE: if the inlet (IN) cartridge is different from the outlet (OUT) cartridge, both dimensions shall be indicated.
Example: MD1-L00-1/4-1/8

New

Series MD pressure filter-regulators

Ports with interchangeable cartridges: threaded (1/8, 1/4, 3/8) or integrated with super-rapid fitting for tube with \varnothing 6, 8 and 10 mm. Modular assembly
Bowl with technopolymer cover and bayonet-type mounting

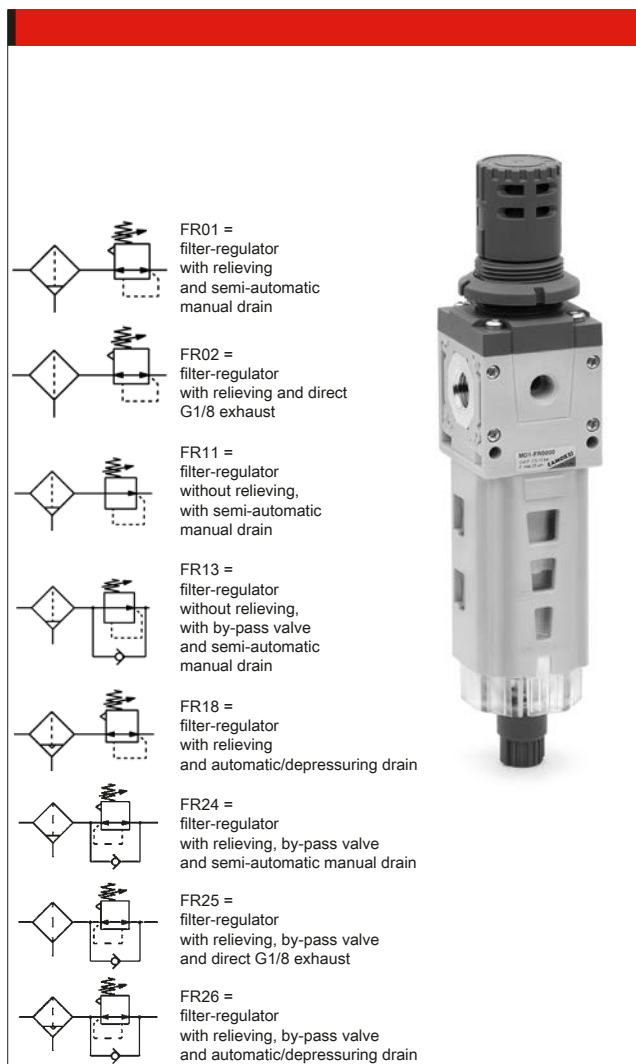

CODING EXAMPLE

MD	1	-	FR	0	0	0	0	-	1/8
----	---	---	----	---	---	---	---	---	-----

MD SERIES

1 DIMENSION:
1 = 42 mm

FR FILTER-REGULATOR

0 FILTERING ELEMENT AND DESIGN TYPE:
0 = 25 μ m with relieving
1 = 5 μ m with relieving
2 = 25 μ m without relieving *
3 = 5 μ m without relieving *
4 = 25 μ m with relieving and by-pass valve
5 = 5 μ m with relieving and by-pass valve
6 = 25 μ m without relieving, with by-pass valve *
7 = 5 μ m without relieving, with by-pass valve *
* this option is available with semiautomatic-manual drain only

0 CONDENSATE DRAIN:
0 = semiautomatic-manual drain
5 = automatic drain, protected depressurisation
8 = direct G1/8 exhaust

0 OPERATING PRESSURE (1 bar = 14,5 psi):
0 = 0.5 + 10 bar
2 = 0 + 2 bar
4 = 0 + 4 bar
7 = 0.5 + 7 bar

0 PRESSURE GAUGE:
0 = without pressure gauge (with 1/8 port)


1/8 PORTS (IN - OUT)*:
= without cartridges
1/8 = G1/8
1/4 = G1/4
3/8 = G3/8
6 = tube \varnothing 6
8 = tube \varnothing 8
10 = tube \varnothing 10

* NOTE: if the inlet (IN) cartridge is different from the outlet (OUT) cartridge, both dimensions shall be indicated.
Example: MD1-FR0000-1/4-1/8

Series MD lockable isolation 3/2-way valves

New

Ports with interchangeable cartridges: threaded (1/8, 1/4, 3/8) or integrated with super-rapid fitting for tube with \varnothing 6, 8 and 10 mm. Modular. Manual, electro-pneumatic, servo-pilot and pneumatic control

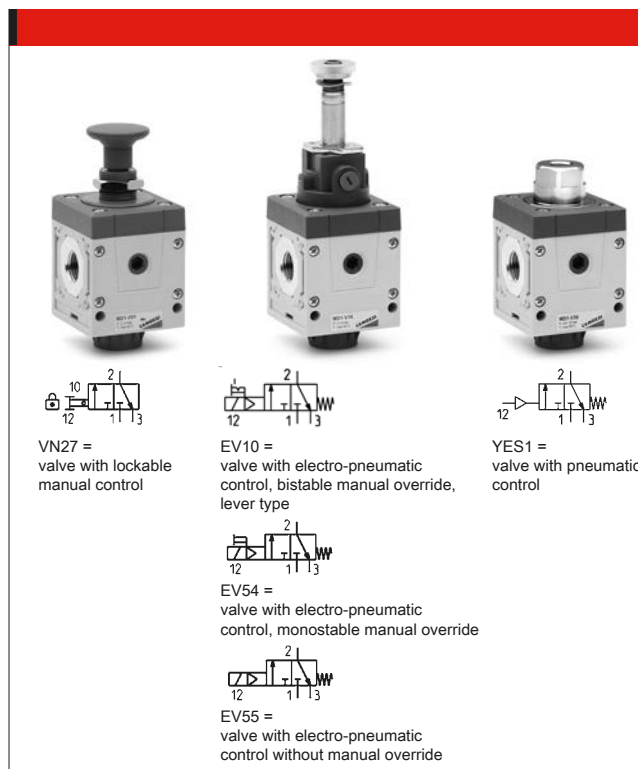

CODING EXAMPLE

MD	1	-	V	01	-	1/8
----	---	---	---	----	---	-----

MD SERIES

1 DIMENSION:
1 = 42 mm

V 3/2-WAY VALVE

01 DESIGN TYPE:
01 = lockable manual control
16 = electro-pneumatic control, Push & Turn manual override
16IL = electro-pneumatic control, bistable manual override, lever type
16IM = electro-pneumatic control, monostable manual override
16IT = electro-pneumatic control without manual override
36 = pneumatic control


1/8 PORTS (IN - OUT) *:
= without cartridges
1/8 = G1/8 - 1/4 = G1/4 - 3/8 = G3/8
6 = tube \varnothing 6 - 8 = tube \varnothing 8 - 10 = tube \varnothing 10

* NOTE: if the inlet (IN) cartridge is different from the outlet (OUT) cartridge, both dimensions shall be indicated. Example: MD1-V01-1/4-1/8

Series MD soft start valves

New

Ports with interchangeable cartridges: threaded (1/8, 1/4, 3/8) or integrated with super-rapid fitting for tube with \varnothing 6, 8 and 10 mm. Modular assembly

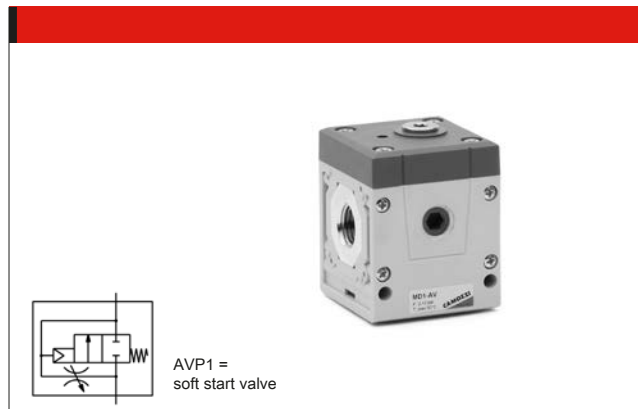

CODING EXAMPLE

MD	1	-	AV	-	1/8
----	---	---	----	---	-----

MD SERIES

1 DIMENSION:
1 = 42 mm

AV SOFT START VALVE

1/8 PORTS (IN - OUT) *:
= without cartridges - 1/8 = G1/8 - 1/4 = G1/4 - 3/8 = G3/8
6 = tube \varnothing 6 - 8 = tube \varnothing 8 - 10 = tube \varnothing 10

* NOTE: if the inlet (IN) cartridge is different from the outlet (OUT) cartridge, both dimensions shall be indicated. Example: MD1-AV-1/4-1/8

Series MD take-off blocks

New

Module with interchangeable cartridges: threaded (1/8, 1/4, 3/8) or integrated with super-rapid fitting for tube with \varnothing 6, 8 and 10 mm (5-way version). Intermediate joining cartridge (3-way version)



CODING EXAMPLE

MD	1	-	B	00	-	1/8
----	---	---	---	----	---	-----

MD SERIES

1 DIMENSION:
1 = 42 mm

B TAKE-OFF BLOCK

00 DESIGN TYPE:
00 = standard derivation

1/8 PORTS (IN - OUT) *:
= without cartridges - 1/8 = G1/8 - 1/4 = G1/4 - 3/8 = G3/8
6 = tube \varnothing 6 - 8 = tube \varnothing 8 - 10 = tube \varnothing 10


* NOTE: if the inlet (IN) cartridge is different from the outlet (OUT) cartridge, both dimensions shall be indicated. Example: MD1-B00-3/8-10

Series MD assembled FRL

Ports with interchangeable cartridges: threaded (1/8, 1/4, 3/8)
or integrated with super-rapid fitting for tube with \varnothing 6, 8 and 10 mm
Modular assembly



Configuration of Series MD assembled groups

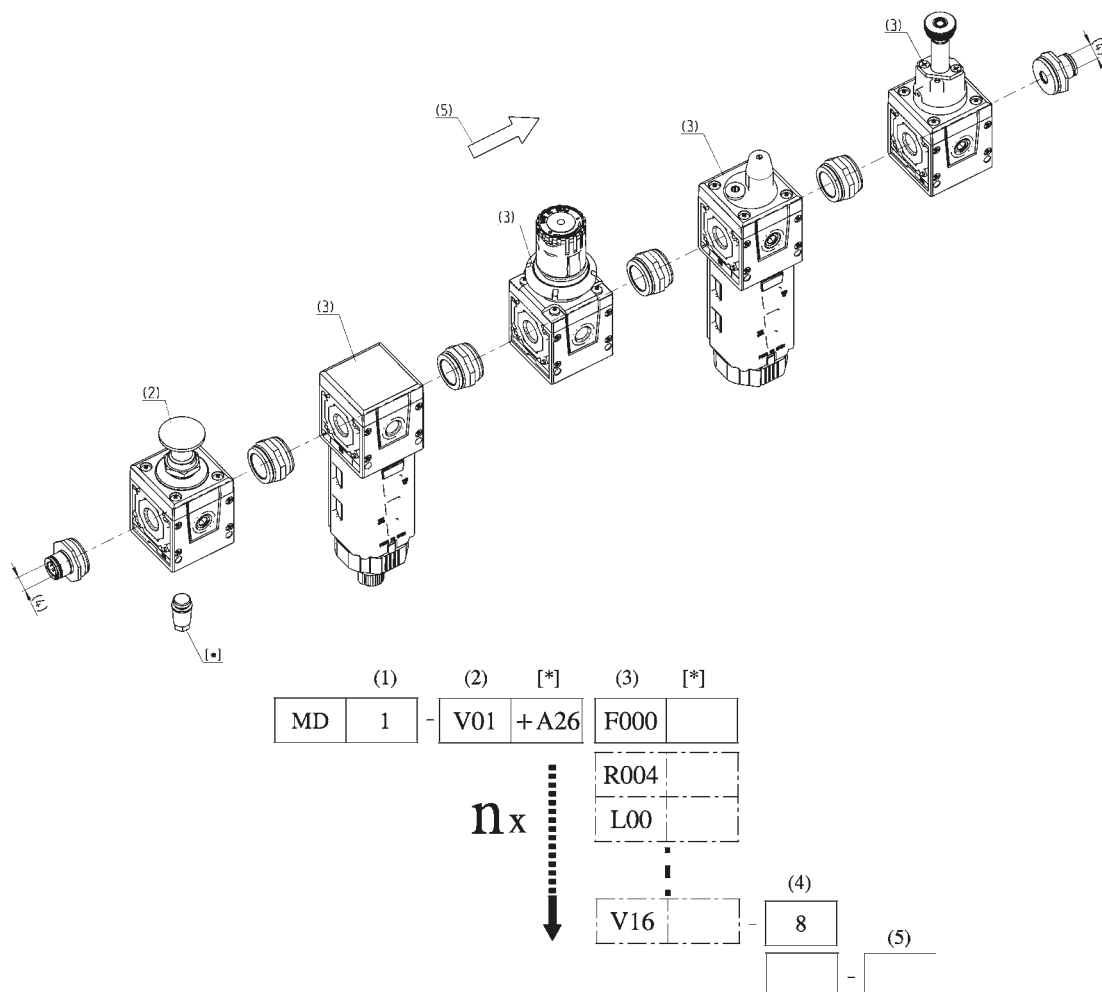

Configuration of the assembled group in the drawing below:
MD1-V01+A26F000R000L00V16-8

CONFIGURATOR OF SERIES MD ASSEMBLED GROUPS

MD	1	-	V01	F000	R004	L00	V16	-	8	-	LH
MD											
SERIES											
1 (1) DIMENSION: 1 = 42 mm											
-											
V01 (2)											
MODULE + [*] (to configure the modules, see the single components pages): F... = Filter FC... = Coalescing filter FCA... = Activated carbons filter R... = Pressure regulator L... = Lubricator FR... = Filter-Regulator V... = Lockable isolation valve AV... = Soft start valve B... = Take-off block											
[*]											
The following ACCESSORIES can be added after every single module:											
REGULATOR, FILTER-REGULATOR AND MANIFOLD REGULATOR											
+A01 = M043-P04 (pressure gauge) +A02 = M043-P06 (pressure gauge) +A03 = M043-P10 (pressure gauge) +A04 = M043-P12 (pressure gauge) +A05 = SWCN-P10-P3-2 (pressure switch) +A06 = SWCN-P10-P4-2 (pressure switch) +A07 = SWCN-P10-P4-M (pressure switch) +A08 = PG010-PB-1/8 (pressure gauge)											
LOCKABLE ISOLATION VALVE ...V01 / V16 / V36											
+A25 = 2901 1/8 (silencier) +A26 = 2921 1/8 (silencier) - recommended choice +A27 = 2931 1/8 (silencier) +A28 = 2938 1/8 (silencier) +A01 = M043-P04 (pressure gauge) +A02 = M043-P06 (pressure gauge) +A03 = M043-P10 (pressure gauge) +A04 = M043-P12 (pressure gauge) +A05 = SWCN-P10-P3-2 (pressure switch) +A06 = SWCN-P10-P4-2 (pressure switch) +A07 = SWCN-P10-P4-M (pressure switch) +A08 = PG010-PB-1/8 (pressure gauge)											
LOCKABLE ISOLATION VALVE...V16											
+A35 = U7H (coils 12V DC) +A36 = U77 (coils 24V DC) +A37 = U79 (coils 48V DC) +A38 = U7K (coils 110V AC) +A39 = U7J (coils 230V AC) +A40 = G7H (coils 12V DC) +A41 = G77 (coils 24V DC) +A42 = G79 (coils 48V DC) +A43 = G7K (coils 110V AC) +A44 = G7J (coils 230V AC)											
SOFT START VALVE AND 5-WAY TAKE-OFF BLOCK											
+A15 = PM11-NC (pressure switch mounted on top) +A16 = PM11-NA (pressure switch mounted on top) +A17 = PM681-1 (pressure switch mounted on top) +A18 = PM681-3 (pressure switch mounted on top) +A19 = PM11-SC + S2520 1/8-1/4 (pressure switch with fitting mounted on top) +A05 = SWCN-P10-P3-2 (front mounted pressure switch) +A06 = SWCN-P10-P4-2 (front mounted pressure switch) +A07 = SWCN-P10-P4-M (front mounted pressure switch) +A08 = PG010-PB-1/8 (front mounted pressure switch)											
INTERMEDIATE JOINING CARTRIDGE WITH DERIVATION (MD1-B)											
+A17 = PM681-1 (pressure switch mounted on top) +A18 = PM681-3 (pressure switch mounted on top)											
F000 (3) see MODULE (2) + [*]											
R004 (3) see MODULE (2) + [*]											
L00 (3) see MODULE (2) + [*]											
V16 (3) see MODULE (2) + [*]											
-											
8 (4)											
PORTS (IN - OUT)**: = without cartridges 1/8 = G1/8 1/4 = G1/4 3/8 = G3/8 6 = tube ø 6 8 = tube ø 8 10 = tube ø 10											
-											
LH (5)											
FLOW DIRECTION: = from left to right (standard) LH = from right to left											

nx = the combination "(3) + (*)" can be repeated an odd ("n") number of times

** NOTE: if the inlet (IN) cartridge is different from the outlet (OUT) cartridge, both dimensions shall be indicated. Example: MD1-V01F000R004-3/8-8

Series MX filters

MX2 ports: G3/8, G1/2, G3/4 - MX3 ports: G3/4, G1

Modular

Bowl with technopolymer cover and bayonet-type mounting



FT01 =
filter without drain
with threaded port



FT02 =
filter with semiautomatic
manual drain



FT03 =
filter with automatic
or depressuring drain

CODING EXAMPLE

MX	2	-	3/8	-	F	0	0	-	LH
----	---	---	-----	---	---	---	---	---	----

MX SERIES

2 SIZE:
2 = G3/8 - G1/2 - G3/4
3 = G3/4 - G1

3/8 PORT:
3/8 = G3/8
1/2 = G1/2
3/4 = G3/4
1 = G1

F FILTER

0 FILTERING ELEMENT:
0 = 25 µm (standard)
1 = 5 µm

0 DRAINING OF CONDENSATE *:
0 = semiautomatic-manual drain (standard)
3 = automatic drain
5 = depressuring drain, protected
8 = without drain, with port G1/8

LH FLOW DIRECTION:
= from left to right (standard)
LH = from right to left

* = Further details about condensate drains are available at the end of this chapter

Series MX coalescing filters

MX2 ports: G3/8, G1/2, G3/4 - MX3 ports: G3/4, G1

Modular

Bowl with technopolymer cover and bayonet-type mounting



FA01 =
coalescing filter
without drain
with threaded port



FA02 =
coalescing filter with
semi-automatic manual drain



FA03 =
coalescing filter with automatic
or depressuring drain

CODING EXAMPLE

MX	2	-	3/8	-	FC	0	0	-	LH
----	---	---	-----	---	----	---	---	---	----

MX SERIES

2 SIZE:
2 = G3/8 - G1/2 - G3/4
3 = G3/4 - G1

3/8 PORTS:
3/8 = G3/8
1/2 = G1/2
3/4 = G3/4
1 = G1

FC COALESCING FILTER

0 FILTERING ELEMENT:
0 = 0,01 µm (standard)
1 = 1 µm

0 DRAINING OF CONDENSATE *:
0 = semiautomatic-manual drain (standard)
3 = automatic drain
5 = depressuring drain, protected
8 = without drain, with port G1/8

LH FLOW DIRECTION:
= from left to right (standard)
LH = from right to left

* = Further details about condensate drains are available at the end of this chapter

Series MX activated carbon filters

MX2 ports: G3/8, G1/2, G3/4 - MX3 ports: G3/4, G1

Modular

Bowl with technopolymer cover and bayonet-type mounting



FC01 =
Absorption function
without cup hole

CODING EXAMPLE

MX	2	-	3/8	-	FCA	-	LH
----	---	---	-----	---	-----	---	----

MX

SERIES

2

SIZE:
2 = G3/8 - G1/2 - G3/4
3 = G3/4 - G1

3/8

PORT:
3/8 = G3/8
1/2 = G1/2
3/4 = G3/4
1 = G1

FCA

ACTIVATED CARBON FILTER

LH

FLOW DIRECTION:
= from left to right (standard)
LH = from right to left

Series MX pressure regulators

MX2 ports: G3/8, G1/2, G3/4 - MX3 ports: G3/4, G1

Manifold ports: G1/2 (MX2 only)


Modular. Available with built-in pressure gauges or ports for gauges




PR01 =
regulator
without relieving



PR02 =
regulator
with relieving



PR05 =
regulator without relieving
and with pressure gauge



PR06 =
regulator with relieving
and pressure gauge

CODING EXAMPLE

MX	2	-	3/8	-	R	0	0	4	-	LH
----	---	---	-----	---	---	---	---	---	---	----

MX

SERIES

2

SIZE:
2 = G3/8 - G1/2 - G3/4
3 = G3/4 - G1

3/8

PORTS:
3/8 = G3/8
1/2 = G1/2
3/4 = G3/4
1 = G1

R

TYPER OF REGULATOR:
R = pressure regulator
M = Manifold pressure regulator (MX2 - G1/2 only)

0

OPERATING PRESSURE (1 bar = 14,5 psi):
0 = 0,5 ÷ 10 bar (standard)
4 = 0 ÷ 4 bar
7 = 0,5 ÷ 7 bar (MX2 only)

0

DESIGN TYPE:
0 = relieving (standard)
1 = without relieving

4

PRESSURE GAUGE:
0 = without pressure gauge (with threaded port for gauges)
2 = with built-in pressure gauge 0-6 and working pressure 0 ÷ 4 bar (MX2 only)
3 = with built-in pressure gauge 0-10 and working pressure 0 ÷ 7 bar (MX2 only)
4 = with built-in pressure gauge 0-12 and working pressure 0,5 ÷ 10 bar (standard)

LH


FLOW DIRECTION:
= from left to right (standard)
LH = from right to left

Series MX lubricators

MX2 ports: G3/8, G1/2, G3/4 - MX3 ports: G3/4, G1

Modular

Bowl with technopolymer cover and bayonet-type mounting



LU01 =
lubricator

CODING EXAMPLE

MX	2	-	3/8	-	L	00	-	LH
----	---	---	-----	---	---	----	---	----

MX SERIES

2 SIZE:
2 = G3/8 - G1/2 - G3/4
3 = G3/4 - G1

3/8 PORT:
1/2 = G1/2
3/4 = G3/4
1 = G1

L LUBRICATOR

00 DESIGN TYPE:
00 = atomized oil


LH FLOW DIRECTION:
= from left to right (standard)
LH = from right to left

Series MX filter-regulators


MX2 ports: G3/8, G1/2, G3/4 - MX3 ports: G3/4, G1

Modular


Bowl with technopolymer cover and bayonet-type mounting




FR01 =
filter-regulator
with relieving
and manual drain




FR02 =
filter-regulator
with relieving
and without drain




FR03 =
filter-regulator
with relieving,
manual drain and
pressure gauge




FR04 =
filter-regulator
with relieving,
without drain
and with pressure gauge




FR05 =
filter-regulator
with relieving,
automatic drain
and pressure gauge



FR10 =
filter-regulator
with manual drain,
without relieving
and with pressure gauge



FR11 =
filter-regulator
with manual drain
and without relieving



FR18 =
filter-regulator
with relieving
and automatic drain

CODING EXAMPLE

MX	2	-	3/8	-	FR	0	0	0	4	-	LH
----	---	---	-----	---	----	---	---	---	---	---	----

MX SERIES

2 SIZE:
2 = G3/8 - G1/2 - G3/4
3 = G3/4 - G1

3/8 PORT:
3/8 = G3/8
1/2 = G1/2
3/4 = G3/4
1 = G1

FR FILTER-REGULATOR

0 FILTERING ELEMENT WITH DESIGN TYPE:
0 = 25 µm with relieving (standard)
1 = 5 µm with relieving
2 = 25 µm without relieving (with semiautomatic-manual drain only)
3 = 5 µm without relieving (with semiautomatic-manual drain only)

0 DRAINING OF CONDENSATE *:
0 = semiautomatic-manual drain (standard)
3 = automatic drain
5 = depressuring drain, protected
8 = without drain, with port G1/8

0 OPERATING PRESSURE:
0 = 0,5 + 10 bar (standard)
4 = 0 + 4 bar
7 = 0,5 + 7 bar (MX2 only)


4 PRESSURE GAUGE:
0 = without pressure gauge (with threaded port)
2 = with built-in pressure gauge 0-6 and working pressure 0 + 4 bar
3 = with built-in pressure gauge 0-10 and working pressure 0 + 7 bar (MX2 only)
4 = with built-in pressure gauge 0-12 and working pressure 0,5 + 10 bar (standard)

LH FLOW DIRECTION:
= from left to right (standard)
LH = from right to left

* = Further details about condensate drains are available at the end of this chapter

Series MX lockable isolation 3/2-way valves

MX2 ports: G3/8, G1/2, G3/4 - MX3 ports: G3/4, G1. Modular
Manual, electro-pneumatic, servo-pilot and pneumatic control

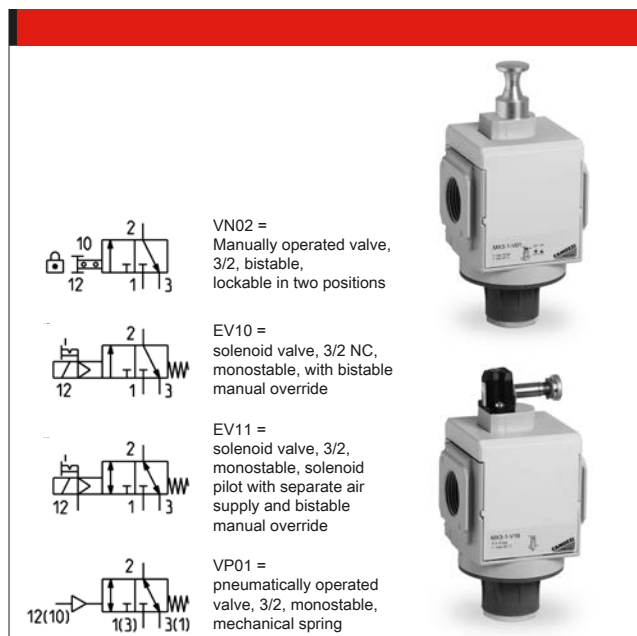


CODING EXAMPLE

MX	2	-	3/8	-	V	01	-	LH
----	---	---	-----	---	---	----	---	----

MX	SERIES
2	SIZE: 2 = G3/8 - G1/2 - G3/4 3 = G3/4 - G1
3/8	PORT: 3/8 = G3/8 1/2 = G1/2 3/4 = G3/4 1 = G1
V	3/2-WAY VALVE
01	DESIGN TYPE: 01 = lockable manual control 16 = electro-pneumatic control 17 = servo-pilot control 36 = pneumatic control
LH	FLOW DIRECTION: = from left to right (standard) LH = from right to left

Series MX soft start valves

MX2 ports: G3/8, G1/2, G3/4 - MX3 ports: G3/4, G1
Modular

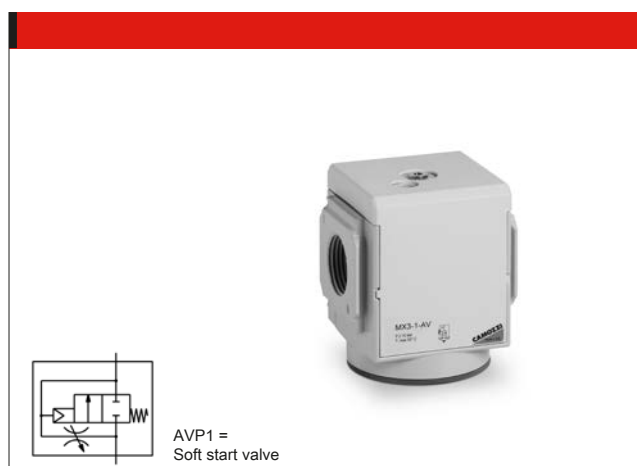

CODING EXAMPLE

MX	2	-	3/8	-	AV	-	LH
----	---	---	-----	---	----	---	----

MX	SERIES
2	SIZE: 2 = G3/8 - G1/2 - G3/4 - 3 = G3/4 - G1
3/8	PORT: 3/8 = G3/8 - 1/2 = G1/2 3/4 = G3/4 - 1 = G1
AV	SOFT START VALVE
LH	FLOW DIRECTION: = from left to right (standard) LH = from right to left

Series MX take-off blocks

MX2 port: G1/2 - MX3 port: G1
Modular



CODING EXAMPLE


MX	2	-	1/2	-	B	00	-	LH
----	---	---	-----	---	---	----	---	----

MX	SERIES
2	SIZE: 2 = G1/2 - 3 = G1
1/2	PORT: 1/2 = G1/2 - 1 = G1
B	TAKE-OFF BLOCK
00	DESIGN TYPE: 00 = without no return valve [VNR] (standard) 01 = with no return valve [VNR] 02 = without no return valve [VNR], with double O-ring seat
LH	FLOW DIRECTION: = from left to right (standard) LH = from right to left


Series MX assembled FRL

MX2 ports: G3/8, G1/2, G3/4 - MX3 ports: G3/4, G1

Assembly through rapid clamps

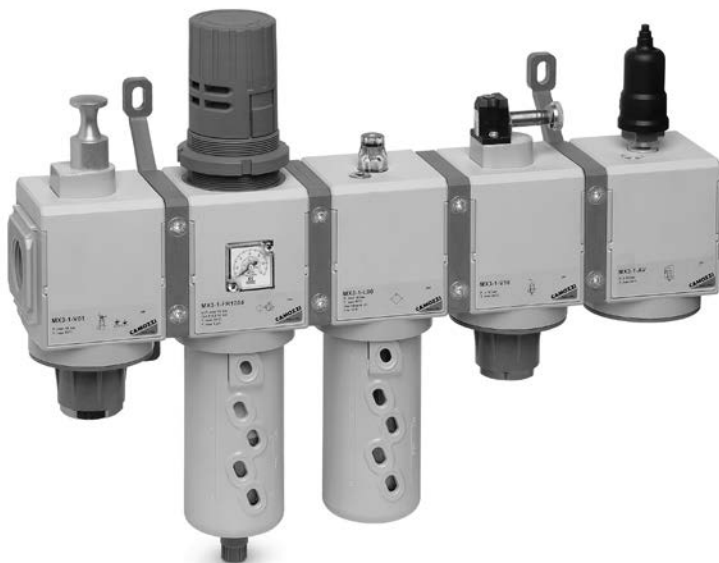

Configurator of assembled groups Series MX

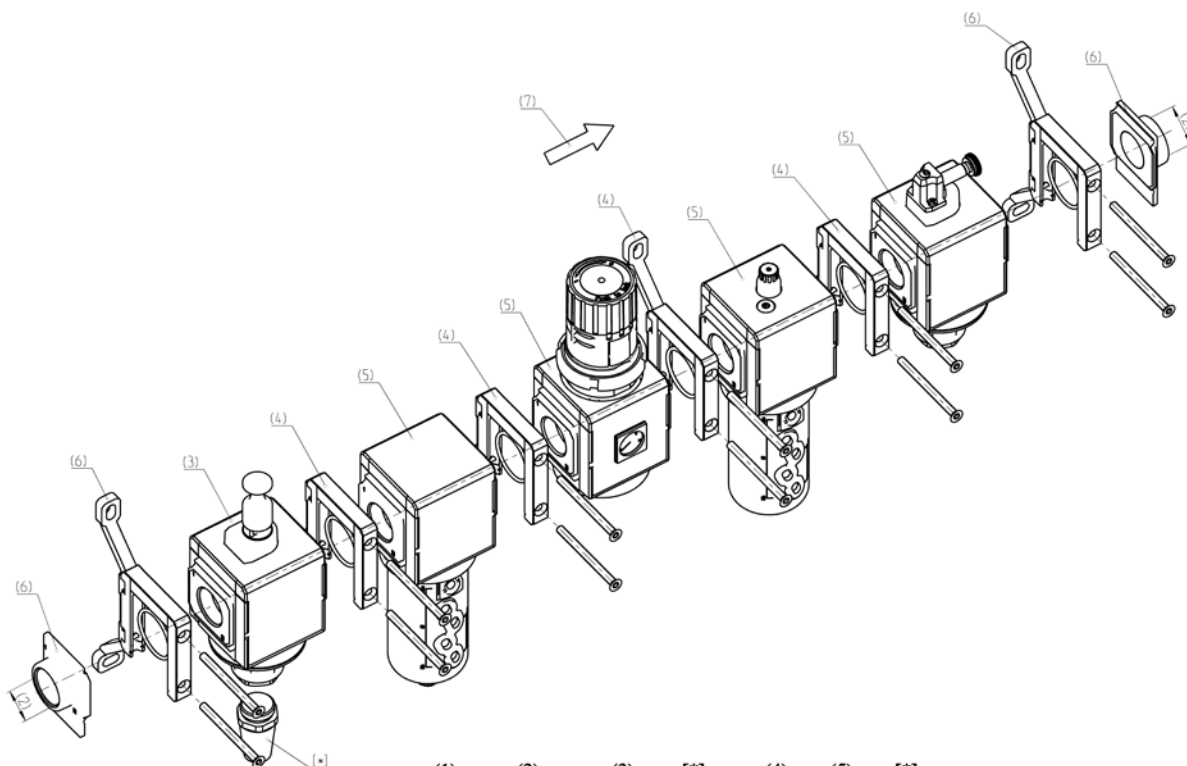

	(1)	(2)	(3)	[*]	(4)	(5)	[*]
MX	2	3/8	V01	+A32	X	F00	

n_x

X	R004
Y	L00

	(6)	/**	(7)
X	V16	KK	

Configuration of the assembled group in the drawing below:
MX2-3/8-V01+A32XF00XR004YL00XV16-KK

CONFIGURATOR OF ASSEMBLED GROUPS SERIES MX

MX	2	-	3/8	-	V01	X	F00	-	KK	-	LH
-----------	----------	----------	------------	----------	------------	----------	------------	----------	-----------	----------	-----------

MX		SERIES
2	(1)	SIZE: 2 = G3/8 - G1/2 - G3/4 3 = G3/4 - G1
-		
3/8	(2)	IN / OUT THREADS: 3/8 = G3/8 1/2 = G1/2 3/4 = G3/4 1 = G1
-		
V01	(3)	MODULE + [*] (to configure the modules, see the single components pages): F... = Filter FC... = Coalescing filter FCA... = Activated carbons filter R... = Pressure regulator L... = Lubricator FR... = Filter-Regulator V... = Lockable isolation valve AV... = Soft start valve B... = Take-off block (MX2: G1/2 only - MX3: G1 only)
	[*]	The following ACCESSORIES can be added after every single module: REGULATOR AND FILTER-REGULATOR MX2 +A56 = M053-P06 (Pressure gauge) +A57 = M053-P10 (Pressure gauge) +A58 = M063-P12 (Pressure gauge) LOCKABLE ISOLATION VALVE MX2 +A30 = 2901 1/2" (Silencier) +A31 = 2921 1/2" (Silencier) +A32 = 2931 1/2" (Silencier) +A33 = 2938 1/2" (Silencier) SOFT START VALVE +A00 = PM11-NA (Pressure switch, normally open) +A01 = PM11-NC (Pressure switch, normally closed) TAKE-OFF BLOCK MX2 +A08 = PM11-NA (normally open pressure switch) with fitting for fixing to the module +A09 = PM11-NC (normally closed pressure switch) with fitting for fixing to the module +A03 = PM11-SC with fitting for fixing to the module Example: MX2-3/8-V01+A32XF00-KK-LH
		REGULATOR AND FILTER-REGULATOR MX3 +A60 = M063-P06 (Pressure gauge) +A61 = M063-P12 (Pressure gauge) LOCKABLE ISOLATION VALVE MX3 +A34 = 2901 3/4" (Silencier) +A35 = 2921 3/4" (Silencier) +A36 = 2931 3/4" (Silencier) TAKE-OFF BLOCK MX3 +A06 = PM11-NA (normally open pressure switch) with fitting for fixing to the module +A07 = PM11-NC (normally closed pressure switch) with fitting for fixing to the module +A02 = PM11-SC with fitting for fixing to the module Example: MX3-3/4-V01+A36XF00-KK-LH
X	(4)	MODULES CONNECTION X = Rapid clamp kit Z = Rapid clamp kit with wall fixing screw Y = Rapid clamp kit with wall fixing brackets
F00	(5) + [*]	see MODULE (3)
-		
KK	(6)	TERMINAL CONNECTIONS + [**] = no terminal connection HH = n° 1 rapid clamp kit with flanges (IN / OUT) JJ = n° 1 rapid clamp kit with wall fixing screws + flanges (IN / OUT) KK = n° 1 rapid clamp kit with wall fixing brackets + flanges (IN / OUT)
	[**]	WALL CONNECTION: REGULATOR and FILTER-REGULATOR S = Bracket (only with clamps mod. X o HH) Codes examples: MX3-1-R..XV..-S; MX3-1-R..XV..-HSH
-		
LH	(7)	FLOW DIRECTION: = from left to right (standard) LH = from right to left
(4) + (5) + [*]		REPEATABLE COMBINATION for a "n" number of times

Series MC filters

Ports G1/4, G3/8 and G1/2

Modular

Metal bowl and bayonet-type mounting



FT01 =
filter without drain
with threaded port



FT02 =
filter with semiautomatic
manual drain



FT03 =
filter with
automatic drain

CODING EXAMPLE

MC	2	02	-	F	0	0
----	---	----	---	---	---	---

MC SERIES

2 SIZE:
1 = G1/4
2 = G3/8 - G1/2

02 PORTS:
04 = G1/4
38 = G3/8
02 = G1/2

F FILTER

0 FILTERING ELEMENT:
0 = 25µm (standard)
1 = 5µm

0 DRAINING OF CONDENSATE *:
0 = normal - semiautomatic (standard)
3 = automatic drain (only for G3/8 and G1/2)
4 = depressurisation (only G1/4)
5 = depressurisation, protected
8 = no drain, port 1/8

* = Further details about condensate drains are available at the end of this chapter

Series MC coalescing filters

Ports G1/4, G3/8 and G1/2

Modular

Metal bowl and bayonet-type mounting



FA01 =
coalescing filter
without drain
with threaded port



FA02 =
coalescing filter
with semi-automatic
manual drain



FA03 =
coalescing filter
with automatic drain

CODING EXAMPLE

MC	2	02	-	F	B	0
----	---	----	---	---	---	---

MC SERIES

2 SIZE:
1 = G1/4
2 = G3/8 - G1/2

02 PORTS:
04 = G1/4
38 = G3/8
02 = G1/2

F FILTER

B FILTERING ELEMENT:
B = 0,01µm


0 DRAINING OF CONDENSATE *:
0 = manual - semi-automatic
3 = automatic (only for G3/8 and G1/2)
4 = depressurisation (only G1/4)
5 = depressurisation, protected
8 = no drain, port 1/8

* = Further details about condensate drains are available at the end of this chapter

Series MC pressure regulators

Ports G1/4, G3/8 and G1/2

Modular



CODING EXAMPLE

MC	2	02	-	R	0	0
----	---	----	---	---	---	---

MC SERIES

2 SIZE:
1 = G1/4
2 = G3/8 - G1/2

02 PORTS:
04 = G1/4
38 = G3/8
02 = G1/2

R REGULATOR

0 OPERATING PRESSURE:
0 = 0.5 + 10 (standard)
1 = 0 ÷ 4
2 = 0 ÷ 2 (only G1/4)
7 = 0.5 ÷ 7 (only G1/4)


0 DESIGN TYPE:
0 = self-relieving (standard)
1 = non-relieving
5 = precise relieving

Series MC lubricators

Ports G1/4, G3/8 and G1/2

Modular

With metal bowl and bayonet-type mounting



CODING EXAMPLE

MC	2	02	-	L	00
----	---	----	---	---	----

MC SERIES

2 SIZE:
1 = G1/4
2 = G3/8 - G1/2

02 PORTS:
04 = G1/4
38 = G3/8
02 = G1/2

L LUBRICATOR


00 DESIGN TYPE:
00 = atomized oil

Series MC filter-regulators

Ports G1/4, G3/8 and G1/2

Modular

Metal bowl and bayonet-type mounting

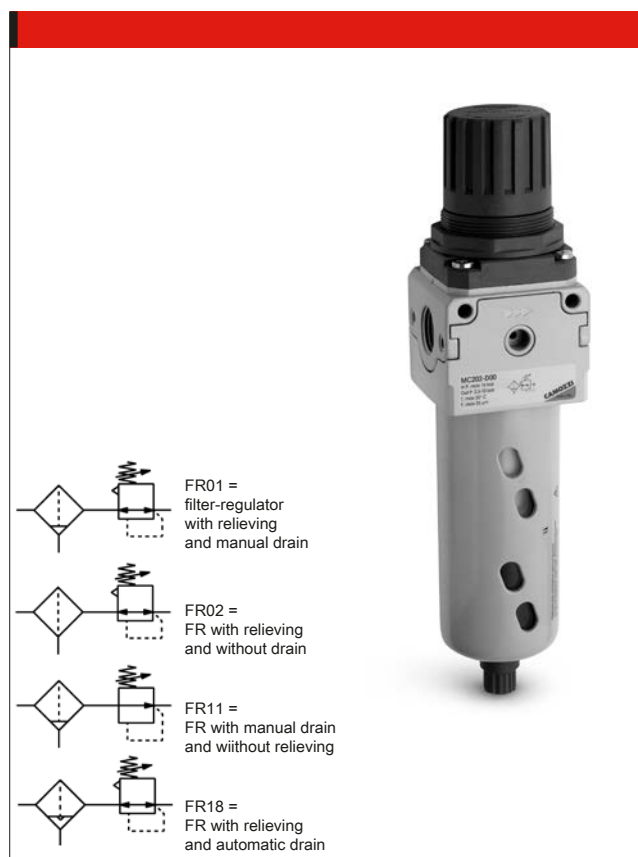

CODING EXAMPLE

MC	2	02	-	D	0	0	-	4
----	---	----	---	---	---	---	---	---

MC SERIES

2 SIZE:
1 = G1/4
2 = G3/8 - G1/2

02 PORTS:
04 = G1/4
38 = G3/8
02 = G1/2

D FILTER-REGULATOR

0 FILTERING ELEMENT:
0 = 25µm (standard)
1 = 5µm

0 DRAINING OF CONDENSATE *:
0 = manual semiautomatic, self-relieving
1 = manual semiautomatic, non relieving
3 = automatic, self-relieving (only for G3/8 and G1/2)
4 = depressurisation, self-relieving (only G1/4)
5 = depressurisation, protected, self-relieving
8 = no drain, port G1/8, self-relieving

4 WORKING PRESSURE
= 0,5 + 10
2 = 0 + 2 (only G1/4)
4 = 0 + 4
7 = 0,5 + 7 (only G1/4)


* = Further details about condensate drains are available at the end of this chapter

Series MC lockable isolation 3/2-way valves

Electropneumatic, pneumatic and manual version

Ports G1/4, G3/8 and G1/2

Modular

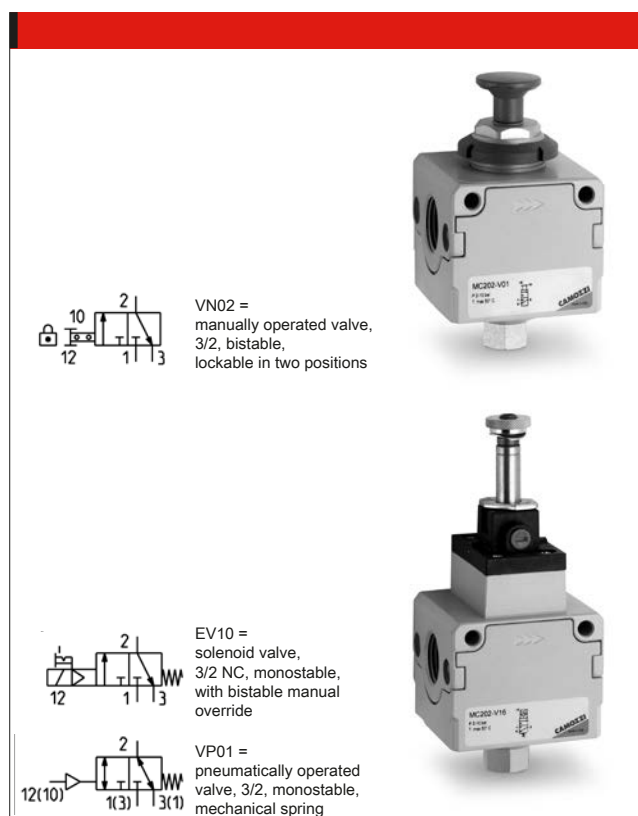

CODING EXAMPLE

MC	2	02	-	V	16
----	---	----	---	---	----

MC SERIES

2 SIZE:
1 = G1/4
2 = G3/8 - G1/2


02 PORTS:
04 = G1/4
38 = G3/8
02 = G1/2

V 3/2-WAY VALVE

16 DESIGN TYPE:
16 = electropneumatic
36 = pneumatic
01 = padlock valve (manual command)

Series MC soft start valves

Ports G1/4, G3/8 and G1/2
Modular



AVP1 =
Soft start valve

CODING EXAMPLE

MC	2	02	-	AV
----	---	----	---	----

MC SERIES

2 SIZE:
1 = G1/4
2 = G3/8 - G1/2

02 PORTS:
04 = G1/4
38 = G3/8
02 = G1/2

AV SOFT START VALVE

Series MC take-off blocks

Ports G1/4 and G1/2
Modular



BL01 =
take-off block



BL02 =
take-off block with VNR

CODING EXAMPLE

MC	2	-	B	-	VNR
----	---	---	---	---	-----

MC SERIES


2 SIZE:
1 = G1/4
2 = G1/2

B TAKE OFF BLOCK

VNR VERSION:
VNR = with no return valve

Series MC assembled FRL

Ports G1/4, G3/8 and G1/2

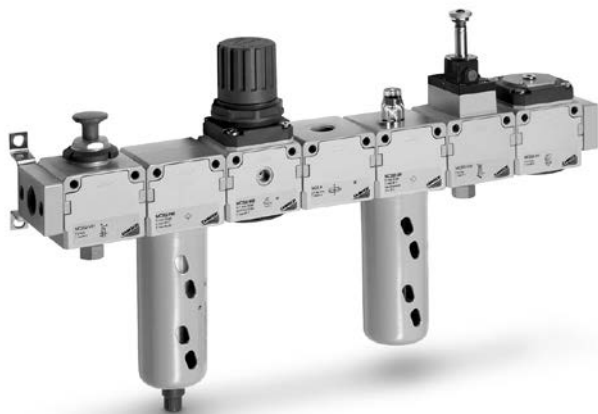

CODING EXAMPLE

MC	2	02	-	C	-	5	-	FL
----	---	----	---	---	---	---	---	----

MC SERIES

2 SIZE:
1 = G1/4
2 = G3/8 - G1/2

02 PORT:
04 = G1/4
38 = G3/8
02 = G1/2

C ASSEMBLY GROUP:
C = D + L
E = V01 + D + L
FRL = F + R + L
GN = D + L + V16 + AV
HNA = V01 + D + L + V16 + AV + PRESS NO
HNC = V01 + D + L + V16 + AV + PRESS NC
N = V01 + D PN = D + V16 + AV
QN = V01 + D + V16 + AV
TN = V01 + D + L + V16 + AV
U = F13 + FB3 (only for 3/8 - 1/2)
ZNA = V01 + D + V16 + AV + PRESS NO
ZNC = V01 + D + V16 + AV + PRESS NC

5 FILTERING ELEMENT:
5 = 5 µm (standard)
25 = 25 µm (upon request)


FL VERSION:
FL = with terminal flanges (without brackets)

LEGEND:
D = Filter-regulator 0.5-10 bar, semi-automatic-manual drain with relieving, filtering element 5 µm or 25 µm
L = Lubricator
V01 = 3/2-way manually operated valve
F = Filter 5 µm or 25 µm
R = Regulator 0.5-10 bar with relieving
V16 = 3/2-way electropneumatically operated valve
AV = Soft start valve
PRESS NO = Pressure switch, Normally Open
PRESS NC = Pressure switch, Normally Closed
F13 = Filter 5 µm with automatic drain
FB3 = Coalescing filter 0.01 µm with automatic drain

Series MC manifold pressure regulators

Ports G1/4

Modular

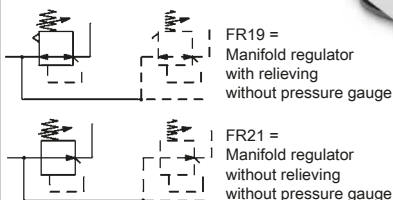

CODING EXAMPLE

MC	1	04	-	M	0	0
----	---	----	---	---	---	---

MC SERIES

1 SIZE:
1 = G1/4

04 PORT:
04 = G1/4

M MANIFOLD REGULATOR

0 OPERATING PRESSURE:
0 = 0,5 ÷ 10 (standard)
1 = 0 ÷ 4
2 = 0,5 ÷ 2
7 = 0,5 ÷ 7


0 CONSTRUCTION:
0 = self-relieving (standard)
1 = non-relieving
5 = precise relieving

Series CLR micro pressure regulators


Ports G1/4, G1/8

With banjo stem with or without relieving

Available with or without banjo in technopolymer



PR03 =
Regulator with
relieving and
by-pass valve



PR04 =
Regulator without
relieving and with
by-pass valve

Mod.
CLR 1/8-4
CLR 1/8-6
CLR 1/8-8
CLR 1/4-6
CLR 1/4-8

Mod.
CLR 1/8
CLR 1/4

CODING EXAMPLE

CL	R		1/8	-	01	-	4
----	---	--	-----	---	----	---	---

CL SERIES

R REGULATOR

1/8 PORTS:
1/8 = G1/8 - 1/4 = G1/4

DESIGN TYPE:
= with relieving
01 = without relieving

4 TUBE:
= without banjo
4 = \varnothing 4 mm (G1/8 only)
6 = \varnothing 6 mm
8 = \varnothing 8 mm

Series M pressure microregulators


Ports G1/8, G1/4



PR01 =
regulator without
relieving



PR02 =
regulator with
relieving



PR03 =
regulator with
relieving and
by-pass valve

Mod.
M008-R00*
M004-R00*
* = calibrated or blocked regulator
available on request

CODING EXAMPLE

M	0	04	-	R	0	0	
---	---	----	---	---	---	---	--

M SERIES

0 SIZE: 0

04 PORTS:
08 = G1/8
04 = G1/4

R REGULATOR


0 OPERATING PRESSURE:
0 = 0,5 ÷ 10 (standard) - 1 = 0 ÷ 4 - 2 = 0 ÷ 2 - 7 = 0,5 ÷ 7

0 DESIGN TYPE:
0 = self relieving
1 = non relieving
5 = precise setting


REGULATION TYPE:
= without high relief flow (standard)
VS = high relief flow

Series T pressure microregulators

Ports G1/8 and G1/4



PR03 =
regulator with
relieving and
by-pass valve



PR04 =
regulator without
relieving and
with by-pass valve

Mod.
T108-R00
T104-R00

CODING EXAMPLE

T	1	08	-	R	0	0
---	---	----	---	---	---	---

T SERIES

1 SIZE

08 PORTS:
08 = G1/8
04 = G1/4

R REGULATOR

0 OPERATING PRESSURE:
0 = 0,5 ÷ 10
1 = 0 ÷ 4
2 = 0 ÷ 2
7 = 0 ÷ 7 (standard)

0 DESIGN TYPE:
0 = self-relieving
1 = non relieving

Series PR precision regulators with manual override

Ports: G1/4



PR02 =
regulator
with relieving

CODING EXAMPLE

PR	1	04	-	M	07
----	---	----	---	---	----

PR SERIES

1 SIZE:
1 = size 1

04 PORTS:
04 = G1/4

M TYPE OF ADJUSTMENT:
M = manual

07 OPERATING PRESSURE (1 bar = 14,5 psi):
02 = 0,05 ÷ 2 bar
04 = 0,05 ÷ 4 bar
07 = 0,05 ÷ 7 bar (standard)

Series N filters and coalescing filters

Ports G1/8, G1/4

With screw-on transparent bowl



CODING EXAMPLE

N	2	04	-	F	0	0
---	---	----	---	---	---	---

N

SERIES

2

SIZE:

1 = small bowl
2 = normal bowl**04**

PORTS:

08 = G1/8
04 = G1/4**F**

FILTER

0

FILTERING ELEMENT:

0 = 25µm (standard)
1 = 5µm
B = 0.01µm**0**

DRAINING OF CONDENSATE *:

0 = manual - semiautomatic drain
4 = depressurisation - only normal bowl (2)
5 = depressurisation, protected - only normal bowl (2)
8 = no drain, port G1/8

* = Further details about condensate drains are available at the end of this chapter

Series N pressure regulators

Ports G1/8, G1/4



CODING EXAMPLE

N	12	04	-	R	0	0
---	----	----	---	---	---	---

N

SERIES

12

SIZE:

12

04

PORTS:

08 = G1/8
04 = G1/4**R**

REGULATOR

0

OPERATING PRESSURE:

0 = 0,5 ÷ 10 (standard)
1 = 0 ÷ 4
2 = 0 ÷ 2
7 = 0,5 ÷ 7**0**

DESIGN TYPE:

0 = self-relieving
1 = non-relieving

Series N lubricators

Ports G1/8, G1/4
With screw-on transparent bowl



LU01 =
lubricator

Mod.
N108-L00
N104-L00
N208-L00
N204-L00

CODING EXAMPLE

N	2	04	-	L	00
---	---	----	---	---	----

N SERIES

2 SIZE:
1 = small bowl
2 = normal bowl


04 PORTS:
08 = G1/8
04 = G1/4

L LUBRICATOR


00 DESIGN TYPE:
00 = atomized oil

Series N filter-regulators

Ports G1/8, G1/4
With screw-on transparent bowl



FR01 =
filter-regulator
with relieving and
manual drain



FR02 =
FR with
relieving and
without drain



FR11 =
FR with manual drain
and without relieving

Mod.
N108-D00
N104-D00
N208-D00
N204-D00

CODING EXAMPLE

N	2	04	-	D	0	0	-	4
---	---	----	---	---	---	---	---	---

N SERIES

2 SIZE:
1 = small bowl
2 = normal bowl

04 PORTS:
08 = G1/8
04 = G1/4

D FILTER-REGULATOR

0 FILTERING ELEMENT:
0 = 25µm (standard)
1 = 5µm

0 DRAINING OF CONDENSATE AND DESIGN TYPE:
0 = manual - semiautomatic, self-relieving draining of condensate
1 = manual - semiautomatic, non-relieving draining of condensate
4 = depressurised draining of condensate, self-relieving (with normal bowl only)
5 = depressurised, protected draining of condensate, self-relieving (with normal bowl only)
8 = no drain, with port 1/8, self-relieving

4 OPERATING PRESSURE:
= 0,5 + 10 bar (standard)
2 = 0 + 2 bar
4 = 0 + 4 bar
7 = 0,5 + 7 bar

Accessories for the air treatment

Systems of rapid connections designed to make the mouting easier

Rapid clamp kit for Series MX - size 2

Mod.
MX2-X
MX2-Z



Kit MX2-X supplied with:

1 rapid clamp, 1 O-ring OR 3125 *,
2 exagonal nuts M5, 2 screws M5x69

Kit MX2-Z supplied with:

1 rapid clamp, 1 O-ring OR 3125 *,
1 exagonal nut M5, 1 screw M5x69, 1 screw M5x85 for wall fixing

* = it can be ordered separately (cod. 160-39-11/19)

Materials: technopolymer clamp, NBR O-ring,
zinc-plated steel nuts and screws

Rapid clamp kit for Series MX - size 3

Mod.
MX3-X
MX3-Z



Kit MX3-X supplied with:

1 rapid clamp, 1 O-ring OR 38X2,8 **,
2 square nuts M6, 2 screws M6x75

Kit MX3-Z supplied with:

1 rapid clamp, 1 O-ring OR 38X2,8 **,
1 square nut M6, 1 screw M6x75, 1 screw M6x90 for wall fixing

** = it can be ordered separately (OR 38X2,8 NBR)

Materials: technopolymer clamp, NBR O-ring,
zinc-plated steel nuts and screws

Rapid clamp kit with wall fixing brackets for Series MX - size 2

Mod.
MX2-Y



The kit MX2-Y is supplied with:

1 wall rapid clamp, 1 O-ring OR 3125 **,
2 exagonal nuts M5, 2 screws M5x69

** = it can be separately ordered (cod. 160-39-11/19)

Materials: technopolymer clamp, NBR O-ring,
zinc-plated steel nuts and screws

Rapid clamp kit with wall fixing brackets for Series MX - size 3

Mod.
MX3-Y



The kit MX3-Y is supplied with:


1 wall rapid clamp, 1 O-ring OR 38X2,8 **,
2 square nuts M6, 2 screws M6x75

** = it can be also separately ordered (OR 38X2,8 NBR)

Materials: technopolymer clamp, NBR O-ring,
zinc-plated steel nuts and screws

Terminal flanges (IN/OUT) for Series MX

Mod.
MX2-3/8-FL
MX2-1/2-FL
MX2-3/4-FL
MX3-3/4-FL
MX3-1-FL



The kit is supplied with:

- 1 flange INLET side
- 1 flange OUTLET side

Materials: painted aluminium flanges

Fixing bracket for Series MX and Series MC regulators

Mod.
MX2-S for Series MX and Series MC (Mod. MC238 and MC202)
MX3-S for Series MX only



The kit is supplied with
1 zinc-plated steel bracket

Rapid clamps kit + flanges for Series MX



The kit is supplied with:

MX2-3/8-HH 1x MX2-3/8-FL + 2x MX2-X

MX2-1/2-HH 1x MX2-1/2-FL + 2x MX2-X

MX2-3/4-HH 1x MX2-3/4-FL + 2x MX2-X

MX2-3/8-JJ 1x MX2-3/8-FL + 2x MX2-Z

MX2-1/2-JJ 1x MX2-1/2-FL + 2x MX2-Z

MX2-3/4-JJ 1x MX2-3/4-FL + 2x MX2-Z

MX3-3/4-HH 1x MX3-3/4-FL + 2x MX3-X

MX3-1-HH 1x MX3-1-FL + 2x MX3-X

MX3-3/4-JJ 1x MX3-3/4-FL + 2x MX3-Z

MX3-1-JJ 1x MX3-1-FL + 2x MX3-Z

O-ring for Series MX - MC assembly

Mod.

160-39-11/19 (O-ring OR 3125) for Series MX2


OR 38X2,8 NBR (O-ring OR 38X2,8) for Series MX3

458-33/1 (O-ring OR 2068) for Mod. MC104

80-26-11/4T (O-ring OR 3100) for MC238, MC202 [spare part only]



Rapid clamps kit with wall fixing brackets + flanges for Series MX

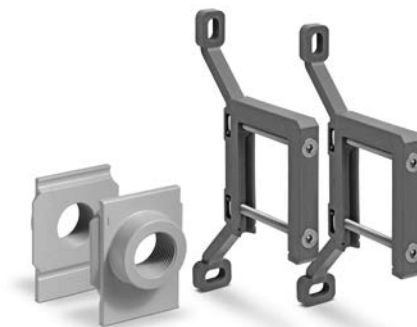

The kit is supplied with:

MX2-3/8-KK 1x MX2-3/8-FL + 2x MX2-Y

MX2-1/2-KK 1x MX2-1/2-FL + 2x MX2-Y

MX2-3/4-KK 1x MX2-3/4-FL + 2x MX2-Y

MX3-3/4-KK 1x MX3-3/4-FL + 2x MX3-Y

MX3-1-KK 1x MX3-1-FL + 2x MX3-Y

Block for Series MX pressure gauge fixing

Mod.

MX2-R26-P

MX3-R26-P



The kit is supplied with:

1 block

1 grain

2 screws

1 seal

Terminal flanges for Series MC (kit A)

Mod.

MC104-FL

MC238-FL

MC202-FL



The kit MC104-FL is supplied with:

1x left flange; 1x right flange; 4x screws M4x14; 2x O-Ring

2068

Each of the kits MC202-FL and MC238-FL is supplied with:

1x left flange; 1x right flange; 4x screws M5x14; 2x O-Ring

3100

Materials: painted aluminium flanges,
zinc-plated steel screws and NBR O-ring

Mounting bracket for Series MC (kit B)

for terminals 1/4, 3/8, 1/2

Mod.

MC104-ST



The kit MC104-ST is supplied with:

- 2x terminal brackets


- 4x screws M5x10

Materials: zinc-plated steel brackets and screws

Mounting bracket for Series MC - M - N - T regulators and filter-regulators (G1/4 - G1/8)

Mod.

C114-ST



The kit is supplied with:

1x zinc-plated steel bracket

Mounting bracket for Series MC - M - N - T regulators and filter-regulators (G1/4 - G1/8)

Mod.

C114-ST/1



The kit is supplied with:

1 zinc-plated steel bracket

Mounting bracket for Series MC - M - N - T
regulators and filter-regulators (G1/4 - G1/8)
Mod.
C114-ST/2



The kit is supplied with:
1 zinc-plated steel bracket

Mounting bracket for Series MC
for MC238 and MC202
Mod.
C238-ST/1



The kit is supplied with:
1 bracket;
2 screws M5X65

Materials: zinc-plated steel bracket and screws

Tie-rods for assembling, Series MC (kit C)
Mod.
MC1-TMF
MC2-TMF



The kit MC1-TMF is supplied with:
2 male/female tie-rods; 1 O-ring 2068
The kit MC2-TMF is supplied with:
2 male/female tie-rods; 1 O-ring 3100

Materials: nickel-plated steel tie-rods and NBR O-ring

Tie-rods for assembling, Series MC (kit D)
Mod.
MC1-TFF
MC2-TFF



The kit MC1-TFF is supplied with:
2 female tie-rods
The kit MC2-TFF is supplied with:
2 female tie-rods

Materials: nickel-plated steel tie-rods

Screws for assembling, Series MC (kit E)
Mod.
MC1-VM
MC2-VM



The kit MC1-VM is supplied with:
2 male screws; 1 O-ring 2068
The kit MC2-VM is supplied with:
2 male screws; 1 O-ring 3100

Materials: zinc-plated steel screws and NBR O-ring

Screws for assembling, Series MC (kit F)
Mod.
MC1-VMF
MC2-VMF



The kit is supplied with:
2 male screws; 2 female screws;
1 O-ring (OR 2068 for MC1-VMF; OR 3100 for MC2-VMF)

Materials: zinc-plated steel male screws,
nickel-plated steel female screws and NBR O-ring

Screws for assembling Series MC (kit G) to join 2 bodies type "M"
Mod.
MC1-VMD
MC2-VMD



The kit MC1-VMD is supplied with:
4 screws M4X10; 4 spacers; 2 O-ring 2068
The kit MC2-VMD is supplied with:
4 screws M5X12; 4 spacers; 2 O-ring 3100

Materials: zinc-plated steel screws, brass spacers and NBR O-ring

Mounting bracket F - L Series N (for N204)
for filters and lubricators
Mod.
N204-ST



The kit is supplied with:
1 bracket
2 screws M5X6

Materials: zinc-plated steel bracket and screws

Pressure gauges Mod. M043.. - M053.. - M063..

Precision class CL1,6

Pressure gauges with radial connection



Mod.
M043-R06
M043-R12
M053-R12
M063-R12

Pressure gauges with rear connection



Mod.
M043-P02,5
M043-P04
M043-P06
M043-P10
M043-P12
M053-P04
M053-P06
M053-P10
M053-P12
M063-P04
M063-P06
M063-P12

Pressure gauges for panel mounting



Mod.
M043-F04
M043-F06
M043-F10
M043-F12
M063-F12

Series PG digital pressure gauges

Possibility of a direct mounting
with rear or panel connection

Series PG digital pressure gauges - battery-powered



Mod.
PG010-PB-1/8
PG001-VB-1/8
PG010-PB-1/4
PG001-VB-1/4

Series PG digital pressure gauges - with cable



Mod.
PG010-PB-1/8-2
PG001-VB-1/8-2
PG010-PB-1/4-M
PG001-VB-1/4-M

CODING EXAMPLE

PG	010	-	P	B	-	1/8	-	2
PG	SERIES							
010	BOTTOM SCALE: 010 = 10 bar 001 = -1 bar							
P	PRESSURE RANGE: P = pressure V = vacuum							
B	LIGHTING: B = back light							
1/8	PNEUMATIC CONNECTIONS: 1/8 = G 1/8 BSPP; M5 1/4 = G 1/4 BSPP; M5 (for battery-powered version only)							
2	ELECTRICAL CONNECTION (for version with cable only): 2 = with unshielded 2-pole cable of 2 m M = with cable of 150 mm and M8 4-pole connector							

Accessories for Series PG

Mounting brackets

Mod.
PG-B

Supplied with:
1x bracket type
1x bracket type
2x screws M3x6



Panel mounting adapter

Mod.
PG-F

Supplied with:
1x adapter type A
1x adapter type B



Functioning condensate drains Filtering elements

Semi-automatic manual drain; Automatic drain;
Depressurisation drain; Depressurisation drain, protected
Port 1/8 (without drain)




3

TREATMENT

Functioning condensate drains for Series MX, MC and N

Semi-automatic manual drain (Type: 0 and 1)


Functioning: with the operator mechanism turned clockwise, each time the pressure falls below 0.3 bar, the draining of condensate will be released; when resetting the pressure, the drain will close again. The release can also be carried out manually; when the bowl is pressurised, the operator mechanism is pushed upwards.



To avoid the discharge of condensate, the operator mechanism should be turned clockwise to completely close the drain.


Automatic drain (Type: 3)

Functioning: the presence of liquid inside the bowl raises the float, thus opening the exhaust valve.




Depressurisation drain (Type: 4)

Functioning: each time air is required from the inlet, a slight difference of pressure is created between the upper part and lower part of the drain that rises, thus opening the exhaust valve.




Depressurisation drain (Type 5)

Solution similar to the Type 4 but requiring a $\Delta P = 1$ bar. Functioning: this version has a filtering element which prevents any impurities from clogging the exhaust hole.



Without drain (Type 8)




The solution with port G1/8 is used to assemble the items to the bowl which is realized with a through hole of $\varnothing 3$ mm and a threaded port G1/8.




4 > Connection




Super-rapid fittings

		Page
Series 6000	Super-rapid fittings for plastic tubes  Tube external diameters: 3, 4, 5, 6, 8, 10, 12, 14, 16 mm Fittings threads: metric (M3, M5, M6, M7), BSP (G1/8, G1/4, G3/8, G1/2, G3/4), BSPT (R1/8, R1/4, R3/8, R1/2)	163
Series 7000	Super-rapid Compact fittings in technopolymer  Tube external diameters: 4, 6, 8, 10, 12, 16 mm Fittings threads: metric (M5, M7), BSP (G1/8, G1/4, G3/8, G1/2, G3/4)	167
Series 8000	Dual seal super-rapid fittings  Tube external diameters: 4, 6, 8, 10 mm Fittings threads: BSP (G1/8, G1/4, G3/8)	169
Series X6000	Super-rapid fittings in stainless steel 316L  Tube external diameters: 4, 6, 8, 10, 12 mm Fittings threads: BSP (G1/8, G1/4, G3/8, G1/2), BSPT (R1/8, R1/4, R3/8, R1/2)	170

Rapid fittings

		Page
Series 1000	Rapid push-in fittings for plastic tubes	171
	Tube external diameters: 5/3, 6/4, 8/6, 10/8, 12/10, 15/12,5 mm Fittings threads: metric (M5, M6, M12x1, M12x1,25), BSP (G1/8, G1/4, G3/8, G1/2), BSPT (R1/8, R1/4, R3/8, R1/2)	



Universal fittings

		Page
Series 1000	Universal nose fittings	174
	Nose fittings for plastic, copper and brass tubes ø 4, 6, 8, 10, 12 mm Fittings threads: BSP (G1/8, G1/4), BSPT (R1/8, R1/4, R3/8, R1/2)	

Fittings accessories

		Page
Series S2000	Pipe fittings Sprint®	175
	Fittings threads: BSP (G1/8, G1/4, G3/8, G1/2), BSPT (R1/8, R1/4, R3/8, R1/2)	
Series 2000	Pipe fittings	176
	Fittings threads: metric (M5), BSP (G1/8, G1/4, G3/8, G1/2, G3/4, G1), BSPT (R1/8, R1/4, R3/8, R1/2, R3/4, R1)	
Series T, MPL, PNZ	Tubing, spirals and accessories	178
	Tubes: reinforced PVC, Polyamide PA12, Hytrel Polyester, Polyethylene, PU Diameters : 4/2, 5/3, 6/4, 8/6, 10/8, 12/10, 15/12,5 mm	

Quick-release couplings

		Page
Series 5000	Quick-release couplings	179
	Nominal diameters: 5 and 7 mm Couplings threads: G1/8, G1/4, G3/8, G1/2 Plastic tubes: 6/4, 8/6, 10/8 Rubber hoses: 6x14, 8x17, 10x19, 13x23	
Series 5000L, 5000LT	Quick-release couplings for the conditioning of moulds for plastics	180
	Nominal diameters: 5, 7 mm Couplings threads: G1/8, G1/4, G3/8	

Series 6000 super-rapid fittings for plastic tubes


New models

Tube external diameters: 3, 4, 5, 6, 8, 10, 12, 14, 16 mm

Fittings threads: metric (M3, M5, M6, M7), BSP (G1/8, G1/4, G3/8, G1/2, G3/4), BSPT (R1/8, R1/4, R3/8, R1/2)

Series 6000 super-rapid fittings have been designed with a special collet which provides an homogeneous tight on the whole surface of plastic tubes, thus ensuring high reliability and a long service life, also after connections and disconnections of the tube are repeated several times. The wide range of these fittings includes many types of threads: metric, BSP and BSPT. Sprint models are characterized by great reliability of female threads, both BSP and BSPT, with non-flat surfaces. This is possible thanks to a Teflon ring on the male thread, which guarantees a perfect seal between the two threads.

The "Stop Fitting" model is available with a self-retaining device which interrupts the air flow when the tube is disconnected and restores it when reconnected.



Mod.
S6510 4-1/8 S6510 10-1/4
S6510 4-1/4 S6510 10-3/8
S6510 5-1/8 S6510 10-1/2
S6510 5-1/4 S6510 12-1/4
S6510 6-1/8 S6510 12-3/8
S6510 6-1/4 S6510 12-1/2
S6510 6-3/8 S6510 14-3/8
S6510 8-1/8 S6510 14-1/2
S6510 8-1/4 S6510 16-1/2
S6510 8-3/8 S6510 16-3/4
S6510 8-1/2

Male Connector *Sprint*®

Mod.
S6510 4-1/8-LF
S6510 6-1/8-LF

Male Connector *Sprint*®
with self-retaining device

Mod. Micro
6512 3-M3°
6512 3-M5*
6512 4-M7-M*
6512 4-1/8-M*^
6512 6-M7-M*
6512 6-1/8-M*^
6512 8-1/8-M*^
6512 10-1/4-M*
° = with gasket
* = with O-Ring
^ = this model can be
used on Series Y
valve islands

Metric-BSP Male Connector



Mod.
6512 4-M5 6512 10-1/4
6512 4-M6 6512 10-3/8
6512 4-1/8 6512 12-1/4
6512 4-1/4 6512 12-3/8
6512 5-M5
6512 6-M5
6512 6-1/8
6512 6-1/4
6512 8-1/8
6512 8-1/4
6512 8-3/8

Metric-BSP Male Connector



Mod.
6463 4-M5
6463 4-1/8
6463 5-1/8
6463 6-1/8
6463 6-1/4
6463 8-1/8
6463 8-1/4
6463 10-1/4

Metric-BSP Female Connector



Mod.
S6520 4-1/8 S6520 8-1/2
S6520 4-1/4 S6520 10-1/4
S6520 5-1/8 S6520 10-3/8
S6520 5-1/4 S6520 10-1/2
S6520 6-1/8 S6520 12-1/4
S6520 6-1/4 S6520 12-3/8
S6520 6-3/8 S6520 12-1/2
S6520 8-1/8 S6520 14-3/8
S6520 8-1/4 S6520 14-1/2
S6520 8-3/8

Swivel Male Elbow *Sprint*®

Mod. Micro
6522 3-M3°
6522 3-M5*
° = with gasket
* = with O-Ring

Metric Swivel Male Elbow



Mod.
6522 4-M5
6522 4-1/8
6522 4-1/4
6522 5-M5
6522 6-M5
6522 6-1/8
6522 6-1/4
6522 8-1/8
6522 8-1/4
6522 8-3/8
6522 10-1/4
6522 10-3/8
6522 12-1/4
6522 12-3/8

Metric-BSP Swivel Male Elbow



Mod.
S6500 4-1/8
S6500 4-1/4
S6500 5-1/8
S6500 5-1/4
S6500 6-1/8
S6500 6-1/4
S6500 8-1/8
S6500 8-1/4
S6500 8-3/8
S6500 10-1/4
S6500 10-3/8
S6500 12-1/4
S6500 12-3/8

Metric Fix Male Elbow



Mod.
6525 6-1/8
6525 6-1/4
6525 8-1/8
6525 8-1/4

Long Swivel Male Elbow *Sprint*®Complete Metric Adjustable
Single Banjo

Metric Fix Male Elbow

Mod.
6501 4-M5



Mod.
S6430 4-1/8
S6430 5-1/8
S6430 5-1/4
S6430 6-1/8
S6430 6-1/4
S6430 8-1/8
S6430 8-1/4
S6430 8-3/8
S6430 10-1/4
S6430 10-3/8
S6430 10-1/2
S6430 12-1/4
S6430 12-3/8
S6430 12-1/2
S6430 14-1/2

Swivel Male Tee *Sprint®*



Metric Swivel Male Tee



Metric-BSP Swivel Male Tee

Mod.
6432 4-M5
6432 4-1/8
6432 5-M5
6432 6-1/8
6432 6-1/4
6432 8-1/8
6432 8-1/4
6432 8-3/8
6432 10-1/4
6432 10-3/8
6432 12-1/4
6432 12-3/8



Mod.
S6440 4-1/8
S6440 5-1/8
S6440 6-1/8
S6440 6-1/4
S6440 8-1/8
S6440 8-1/4
S6440 8-3/8
S6440 10-1/4
S6440 10-3/8
S6440 12-3/8
S6440 14-1/2

Lateral Swivel Male Tee *Sprint®*



Lateral Metric Swivel Male Tee



Lateral Metric-BSP Swivel Male Tee

Mod.
6442 4-M5
6442 4-1/8
6442 5-M5
6442 6-1/8
6442 6-1/4
6442 8-1/8
6442 8-1/4
6442 8-3/8
6442 10-1/4
6442 10-3/8
6442 12-1/4
6442 12-3/8



Mod. Micro
6452 3-M3°
6452 3-M5°
° = with gasket
* = with O-Ring

Metric Swivel Male Y



* = Metric Adjustable Male Y
(not swivel Model with gasket)
° = Swivel Male Y *Sprint®*



Complete BSP Swivel
Single Banjo

Mod.
6622 4-M5°
6622 4-1/8
6622 6-1/8
6622 6-1/4
6622 8-1/8
6622 8-1/4
6622 10-1/4
* = Complete
Metric Swivel
Single Banjo



Complete BSP Swivel
Double Banjo

Mod.
6632 4-1/8
6632 6-1/8
6632 6-1/4
6632 8-1/8
6632 8-1/4
6632 10-1/4



Double Banjo
Assembled with:
° = Mod. SCU, SVU, SCO...
* = Mod. 1631, 1635, SCU, SVU, SCO...

Mod.
6620 4-M5°
6620 4-1/8°
6620 6-1/8°
6620 6-1/4°
6620 8-1/8°
6620 8-1/4°



01... = Single Banjo Stem
02... = Double Banjo Stem
03... = Triple Banjo Stem

Mod.
1631 01-
1631 02-
1631 03-



Single Banjo
Assembled with:
° = Mod. 1631
° = Mod. SCU, SVU, SCO...
* = Mod. 1631, 1635, SCU, SVU, SCO...
** = Mod. 1635, SCU, SVU, SCO...
^ = Mod. 1635

Mod.
6610 4-M5° 6610 6-1/8°
6610 4-M6° 6610 6-1/4°
6610 4-1/8° 6610 8-1/8°
6610 5-M5° 6610 8-1/4°
6610 5-M6° 6610 8-3/8°
6610 5-1/8° 6610 10- 1/4°**
6610 6-M5° 6610 10- 3/8°**
6610 6-M6° 6610 12-1/2°^



Metric Male Adaptor *Sprint®*

Mod.
6811 4-M5°
6811 4-1/8
6811 5-1/8
6811 5-1/4
6811 6-1/8
6811 6-1/4
6811 8-1/8
6811 8-1/4
6811 10-1/4
6811 10-3/8
6811 12-3/8
6811 14-1/2
* = with O-Ring



45° Male Elbow *Sprint®*

Mod.
S6110 6-1/8
S6110 6-1/4
S6110 8-1/8
S6110 8-1/4
S6110 8-3/8
S6110 10-1/4
S6110 10-3/8
S6110 10-1/2
S6110 12-1/4
S6110 12-3/8
S6110 12-1/2

Mod. Micro
6590 3



Bulkhead Connector

Mod.
6590 4
6590 5
6590 6
6590 8
6590 10
6590 12
6590 14



Bulkhead Connector

Mod. Micro
6580 3



Union Connector

Mod.
6580 4
6580 5
6580 6
6580 8
6580 10
6580 12
6580 14



Union Connector

Mod.
6580 6-4
6580 8-6
6580 10-8
6580 12-10



Reducer Union Connector

Mod.
6593 6-1/8
6593 6-1/4
6593 8-1/8
6593 8-1/4
6593 10-3/8



BSP Female Bulkhead

Mod. Micro
6550 3



Elbow connector

Mod.
6550 4
6550 5
6550 6
6550 8
6550 10
6550 12
6550 14



Elbow connector

Mod. Micro
6540 3



Tee Connector

Mod.
6540 4
6540 5
6540 6
6540 8
6540 10
6540 12
6540 14



Tee Connector

Mod.
6600 4
6600 5
6600 6
6600 8
6600 10
6600 12



Cross Junction

Mod. Micro
6560 3



Y Union

Mod.
6560 4
6560 6
6560 8
6560 10



Y Union

Mod.
6700 3
6700 4
6700 5
6700 6
6700 8
6700 10



Cartridge for both metallic
and synthetic seat

Mod.
6750 4
6750 6
6750 8
6750 10
6750 12



Female Plug

Mod.
6850 6-4
6850 8-6



Enlarger Junction

Mod. Micro
6800 3-4



Reducer Junction

Mod.
6800 4-5
6800 4-6
6800 4-8
6800 5-6
6800 5-8
6800 6-8
6800 6-10
6800 6-12
6800 8-10
6800 8-12
6800 10-12
6800 10-14
6800 12-14



Reducer Junction

Mod.
6950 4
6950 6
6950 8
6950 10
6950 12
6950 14



Junction

Mod.
6555 4-4
6555 6-6
6555 8-8
6555 10-10



Junction Elbow

Mod.
6708 4
6708 5
6708 6
6708 8
6708 10
6708 12
6708 14



Protection caps
Colour: Black
Self-extinguishing material, class V0

Mod. Micro
6900 3



Plastic Male Plug

Mod.
6900 4
6900 5
6900 6
6900 8
6900 10
6900 12
6900 14



Plastic Male Plug

Mod.
SP



The set includes keys to disconnect tubes with
diameters between 4 and 12 mm

Series 7000

super-rapid Compact fittings in technopolymer

New models

Tube external diameters: 4, 6, 8, 10, 12, 16 mm



Fittings threads: metric (M5, M7), BSP (G1/8, G1/4, G3/8, G1/2, G3/4)

Series 7000 super-rapid fittings are realized in technopolymer.

Compact and lightweight, they are suitable for applications where weight can be a key factor. The special collet, which has been designed properly for this series, provides an homogeneous tight on the whole surface of plastic tubes, thus ensuring high reliability and long service life, also after connections and disconnections of the tube are repeated several times.

Series 7000 fittings are the answer to the many requests coming from the Pneumatic and Automation market.

The new "Stop Fitting" model is available with a self-retaining device which interrupts the air flow when the tube is disconnected and restores it when reconnected.

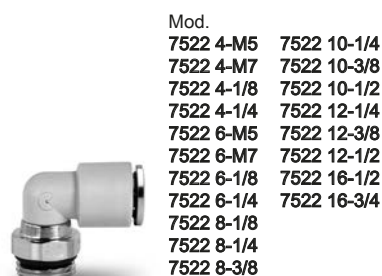


Metric-BSP Male Swivel Elbow

Mod.
7522 4-M5 7522 10-1/4
7522 4-M7 7522 10-3/8
7522 4-1/8 7522 10-1/2
7522 4-1/4 7522 12-1/4
7522 6-M5 7522 12-3/8
7522 6-M7 7522 12-1/2
7522 6-1/8 7522 16-1/2
7522 6-1/4 7522 16-3/4
7522 8-1/8
7522 8-1/4
7522 8-3/8


Metric-BSP Male Swivel Elbow
with self-retaining device

Mod.
7522 4-1/8-LF
7522 6-1/8-LF




Long BSP Male Swivel Elbow

Mod.
7526 4-1/8
7526 6-1/8
7526 6-1/4
7526 8-1/8
7526 8-1/4


Lateral BSP
Swivel Male Tee


Mod.
7442 4-1/8
7442 6-1/8
7442 6-1/4
7442 8-1/8
7442 8-1/4
7442 8-3/8
7442 10-1/4
7442 10-3/8
7442 12-3/8
7442 12-1/2
7442 16-1/2*
7442 16-3/4*

* = model without
mounting holes



BSP Swivel Male Tee

Mod.
7432 4-M5
7432 4-1/8
7432 6-M5
7432 6-1/8
7432 6-1/4
7432 8-1/8
7432 8-1/4
7432 8-3/8
7432 10-1/4
7432 10-3/8
7432 12-1/4
7432 12-3/8
7432 12-1/2
7432 16-1/2
7432 16-3/4



BSP Swivel Male Multi Tee Reducer

Mod.
7542 6-4-1/8
7542 6-4-1/4
7542 8-6-1/8
7542 8-6-1/4
7542 10-8-1/4
7542 10-8-3/8



BSP Swivel Male Y

Mod.
7562 4-1/8
7562 6-1/8
7562 6-1/4
7562 8-1/8
7562 8-1/4
7562 10-1/4
7562 10-3/8




BSP Male Double Y

Mod.
7572 4-1/8
7572 4-1/4
7572 6-1/8
7572 6-1/4




Complete BSP Swivel Single Banjo

Mod.
7622 4-1/8
7622 6-1/8
7622 6-1/4
7622 8-1/8
7622 8-1/4
7622 10-1/4
7622 10-3/8
7622 12-3/8

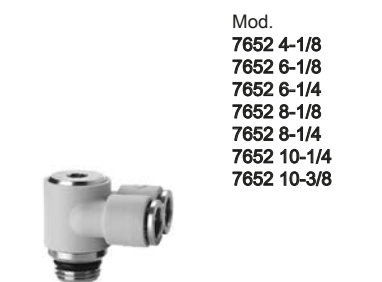


Complete BSP Swivel Double Banjo

Mod.
7652 4-1/8
7652 6-1/8
7652 6-1/4
7652 8-1/8
7652 8-1/4
7652 10-1/4
7652 10-3/8


Single Banjo
Assembled with Mod. 7632 02, 7632 03

Mod.
7610 4-1/8
7610 6-1/8
7610 6-1/4
7610 8-1/8
7610 8-1/4
7610 10-1/4
7610 10-3/8
7610 12-3/8


Double Banjo
Assembled with Mod. 7632 02, 7632 03

Mod.
7640 4-1/8
7640 6-1/8
7640 6-1/4
7640 8-1/8
7640 8-1/4
7640 10-1/4



Mod.
7632 02-1/8
7632 02-1/4
7632 02-3/8

Double Banjo Stem
Assembled with Mod. 7610, 7640



Mod.
7632 03-1/8
7632 03-1/4

Triple Banjo Stem
Assembled with Mod. 7610, 7640



Mod.
7612 02 4-1/8
7612 02 6-1/8
7612 02 6-1/4
7612 02 8-1/8
7612 02 8-1/4
7612 02 10-1/4
7612 02 10-3/8
7612 02 12-3/8

Complete BSP Double Adjustable
Single Banjo



Mod.
7612 03 4-1/8
7612 03 6-1/8
7612 03 6-1/4
7612 03 8-1/8
7612 03 8-1/4
7612 03 10-1/4

Complete BSP Triple Adjustable
Single Banjo



Mod.
7642 02 4-1/8
7642 02 6-1/8
7642 02 6-1/4
7642 02 8-1/8
7642 02 8-1/4
7642 02 10-1/4

Complete BSP Double Adjustable
Double Banjo



Mod.
7642 03 4-1/8
7642 03 6-1/8
7642 03 6-1/4
7642 03 8-1/8
7642 03 8-1/4
7642 03 10-1/4

Complete BSP Triple Adjustable
Double Banjo



Mod.
7800 4-6
7800 4-8
7800 6-8
7800 6-10
7800 6-12
7800 8-10
7800 8-12
7800 10-12
7800 10-14

Reducer Junction



Mod.
7555 4-4
7555 6-6
7555 8-8
7555 10-10
7555 12-12

Junction Elbow



Mod.
7580 4
7580 6
7580 8
7580 10
7580 12

Union Connector



Mod.
7550 4
7550 6
7550 8
7550 10
7550 12
7550 16*

* = model without
mounting holes

Elbow Connector



Mod.
7540 4
7540 6
7540 8
7540 10
7540 12
7540 16*

* = model without
mounting holes

Tee Connector



Mod.
7545 6-4
7545 8-6
7545 10-8

Multi Tee Reducer



Mod.
7560 4
7560 6
7560 8
7560 10
7560 6-4
7560 8-6
7560 10-8

Y Connector - Reducer



Mod.
7575 6-4
7575 8-6

Reduced Double Y



Mod.
7950 4
7950 6
7950 8
7950 10
7950 12

Plastic Junction

Series 8000

dual seal super-rapid fittings

New models


Tube external diameters: 4, 6, 8, 10, 12 mm

Fittings threads: BSP (G1/8, G1/4, G3/8, G1/2)

With its vast experience in manufacturing push-in connections for the pneumatics industry and its indepth research into fluid power systems, Camozzi has developed Series 8000 super-rapid fitting evolving from Series 6000, which has been which has been extensively tested in the pneumatic sector.

A patented additional seal provides a double tight on the tube, thus ensuring a highly reliable connection and avoiding any possible leakage that may occur. Connection and disconnection of the tube can be repeated several times without the use of proper tools and without compromising the performance of the fitting of the sealing on the tube.

The NBR seals are standard and can be easily replaced with FKM and EDM seals.



Mod.
8512 4-1/8
8512 6-1/8
8512 6-1/4
8512 8-1/8
8512 8-1/4
8512 10-1/4
8512 10-3/8
8512 12-3/8
8512 12-1/2

BSP Male Connector



Mod. Micro
8522 4-1/8
8522 6-1/8
8522 6-1/4
8522 8-1/8
8522 8-1/4
8522 10-1/4
8522 10-3/8
8522 12-3/8
8522 12-1/2

BSP Swivel Male Elbow



Mod.
8432 4-1/8
8432 6-1/8
8432 8-1/8
8432 8-1/4

BSP Swivel Male Tee



Mod.
8580 4
8580 6
8580 8

Union Connector



Mod.
8540 4
8540 6
8540 8

Tee Connector



Mod.
8550 4
8550 6
8550 8

Elbow Connector


Series X6000 super-rapid fittings in stainless steel 316L

Tube external diameters: 4, 6, 8, 10, 12 mm

Fittings threads: BSP (G1/8, G1/4, G3/8, G1/2), BSPT (R1/8, R1/4, R3/8, R1/2)

Series X6000 fittings have been designed to offer versatility and ease of installation without any compromise in quality or performance. They are suitable for applications in the pneumatics, fluids, chemical, medical, food and packaging industries.

Series X6000 fittings are practical and safe and allow the connection of fluids even in aggressive environments. The collet ensures excellent grip between the fitting and tubing.



Mod.
X6510 4-1/8
X6510 4-1/4
X6510 6-1/8
X6510 6-1/4
X6510 8-1/8
X6510 8-1/4
X6510 10-1/4
X6510 10-3/8
X6510 10-1/2
X6510 12-1/4
X6510 12-3/8
X6510 12-1/2

BSPT Male Connector



Mod.
X6512 4-1/8
X6512 4-1/4
X6512 6-1/8
X6512 6-1/4
X6512 8-1/8
X6512 8-1/4
X6512 10-1/4
X6512 10-3/8
X6512 10-1/2
X6512 12-1/4
X6512 12-3/8
X6512 12-1/2

BSP Male Connector



Mod.
X6500 4-1/8
X6500 6-1/8
X6500 6-1/4
X6500 8-1/8
X6500 8-1/4
X6500 10-1/4
X6500 10-3/8
X6500 12-1/4
X6500 12-3/8

BSPT Fix Elbow



Mod.
X6520 4-1/8
X6520 4-1/4
X6520 6-1/8
X6520 6-1/4
X6520 8-1/8
X6520 8-1/4
X6520 10-1/4
X6520 10-3/8
X6520 12-1/4
X6520 12-3/8
X6520 12-1/2

BSPT Swivel Elbow



Mod.
X6430 4-1/8
X6430 4-1/4
X6430 6-1/8
X6430 6-1/4
X6430 8-1/8
X6430 8-1/4
X6430 10-1/4
X6430 10-3/8
X6430 12-1/4
X6430 12-3/8
X6430 12-1/2

BSPT Swivel Centre Tee



Mod.
X6522 4-1/8
X6522 4-1/4
X6522 6-1/8
X6522 6-1/4
X6522 8-1/8
X6522 8-1/4
X6522 10-1/4
X6522 10-3/8
X6522 12-1/4
X6522 12-3/8
X6522 12-1/2

BSP Swivel Elbow



Mod.
X6432 4-1/8
X6432 4-1/4
X6432 6-1/8
X6432 6-1/4
X6432 8-1/8
X6432 8-1/4
X6432 10-1/4
X6432 10-3/8
X6432 12-1/4
X6432 12-3/8
X6432 12-1/2

BSP Swivel Centre Tee



Mod.
X6580 4
X6580 6
X6580 8
X6580 10
X6580 12

Union Connector



Mod.
X6550 4
X6550 6
X6550 8
X6550 10
X6550 12

Elbow Connector



Mod.
X6540 4
X6540 6
X6540 8
X6540 10
X6540 12

Tee Connector



Mod.
X6590 4
X6590 6
X6590 8
X6590 10
X6590 12

Bulkhead Union Connector



Mod.
X6800 4-6
X6800 4-8
X6800 6-8
X6800 6-10
X6800 6-12
X6800 8-10
X6800 8-12
X6800 10-12

Reducer Tube/Stem

Series 1000 rapid push-in fittings for plastic tubes

Tube external diameters: 5/3, 6/4, 8/6, 10/8, 12/10, 15/12,5 mm


Fittings threads: metric (M5, M6, M12x1, M12x1,25),

BSP (G1/8, G1/4, G3/8, G1/2), BSPT (R1/8, R1/4, R3/8, R1/2)

Series 1000 rapid push-in fittings can be easily installed.

The push-in locking nuts can be tightened both manually and with a spanner even in case of stiff tubes like the PA or the Hytrel Polyester.

The special shape of the guiding cone ensures that the tube cannot be accidentally cut.



Mod.
1510 5/3-1/8
1510 6/4-1/8
1510 6/4-1/4
1510 6/4-3/8
1510 6/4-1/2
1510 6/4-M12x1,25
1510 8/6-1/8
1510 8/6-1/4
1510 8/6-3/8
1510 8/6-1/2
1510 10/8-1/8
1510 10/8-1/4
1510 10/8-3/8
1510 10/8-1/2
1510 12/10-3/8
1510 12/10-1/2
1510 15/12,5-1/2

Metric-BSPT Male Connector



Mod.
1511 5/3-M5*
1511 5/3-M6*
1511 5/3-1/8
1511 6/4-M5*
1511 6/4-M6*
1511 6/4-1/8
1511 6/4-1/4
1511 6/4-3/8
1511 8/6-1/8
1511 8/6-1/4
1511 8/6-3/8
1511 10/8-1/8
1511 10/8-1/4
1511 10/8-3/8
1511 10/8-1/2
1511 12/10-3/8
1511 12/10-1/2
1511 15/12,5-1/2

* = with O-Ring

Metric Male Connector *Sprint®*



Mod.
1560 6/4-1/8
1560 6/4-1/4
1560 8/6-1/8
1560 8/6-1/4
1560 10/8-1/4
1560 10/8-3/8
1560 12/10-3/8

Swivel Male Connector *Sprint®*



Mod.
1463 5/3-1/8
1463 6/4-1/8
1463 6/4-1/4
1463 6/4-3/8
1463 8/6-1/8
1463 8/6-1/4
1463 8/6-3/8
1463 10/8-1/8
1463 10/8-1/4
1463 10/8-3/8
1463 10/8-1/2
1463 12/10-3/8

BSP Female Connector



Mod.
1541 6/4-1/8
1541 6/4-1/4
1541 8/6-1/8
1541 8/6-1/4
1541 10/8-1/4

Swivel Male Elbow *Sprint®*



Mod.
1500 5/3-1/8
1500 6/4-1/8
1500 6/4-1/4
1500 6/4-3/8
1500 6/4-M12x1,25
1500 8/6-1/8
1500 8/6-1/4
1500 8/6-3/8
1500 8/6-1/2
1500 10/8-1/8
1500 10/8-1/4
1500 10/8-3/8
1500 10/8-1/2
1500 12/10-3/8
1500 12/10-1/2
1500 15/12,5-1/2

Fix Metric-BSPT Male Elbow



Mod.
1501 5/3-M5

Metric Fix Male Elbow



Mod.
1493 6/4-1/8
1493 6/4-1/4
1493 8/6-1/8
1493 8/6-1/4
1493 10/8-1/4
1493 12/10-3/8

BSP Female Elbow



Mod.
1431 6/4-1/8
1431 6/4-1/4
1431 8/6-1/8
1431 8/6-1/4
1431 10/8-1/4

Swivel Male Tee *Sprint®*



Mod.
1410 5/3-1/8
1410 6/4-1/8
1410 6/4-1/4
1410 8/6-1/8
1410 8/6-1/4
1410 10/8-1/8
1410 10/8-1/4
1410 10/8-1/2
1410 12/10-3/8
1410 12/10-1/2
1410 15/12,5-1/2

BSPT Fix Male Tee



Mod.
1420 5/3-1/8
1420 6/4-1/8
1420 6/4-1/4
1420 8/6-1/8
1420 8/6-1/4
1420 10/8-1/8
1420 10/8-1/4

Lateral BSPT Male Tee



Mod.
1521 5/3-M5
1521 5/3-1/8
1521 6/4-M5
1521 6/4-1/8
1521 6/4-1/4
1521 6/4-3/8
1521 8/6-1/8
1521 8/6-1/4
1521 8/6-3/8

Complete Metric-BSP
Single Adjustable Banjo

Mod.
1525 6/4-1/8
1525 6/4-1/4
1525 6/4-3/8
1525 8/6-1/8
1525 8/6-1/4
1525 8/6-3/8
1525 10/8-1/8
1525 10/8-1/4
1525 10/8-3/8
1525 10/8-1/2
1525 12/10-3/8
1525 12/10-1/2
1525 15/12,5-1/2

Complete Single
Adjustable Long Banjo

Single Banjo
Assembled with:
° = Mod. 1631, 1635
° = Mod. SCU, SVU, SCO...
* = Mod. 1631, 1635,
SCU, SVU, SCO...
** = Mod. 1635, SCU, SVU,
SCO...
^ = Mod. 1635

Mod.
1610 5/3-M5*
1610 5/3-M6°
1610 5/3-1/8*
1610 6/4-M5*
1610 6/4-M6°
1610 6/4-1/8*
1610 6/4-1/4*
1610 6/4-3/8*
1610 8/6-1/8*
1610 8/6-1/4*
1610 8/6-3/8*
1610 10/8-1/8**
1610 10/8-1/4**
1610 10/8-3/8**
1610 10/8-1/2^
1610 12/10-3/8**
1610 12/10-1/2^
1610 15/12,5-1/2^

Double Banjo
Assembled with:
° = Mod. 1631, 1635
* = Mod. 1631, 1635, SCU, SVU, SCO...

Mod.
1620 6/4-M5°
1620 6/4-1/8*
1620 6/4-1/4*
1620 8/6-1/8*
1620 8/6-1/4*



Mod.
1631 01-M5*
1631 01-1/8
1631 01-1/4
1631 01-3/8
1631 01-1/2

* = zinc-plated
steel

Single Banjo Stem
Assembled with adjustable fittings
Mod. 6610, 6620, 1610, 1620, 2023, 1170

Mod.
1635 01-1/8
1635 01-1/4
1635 01-3/8
1635 01-1/2
1635 01-M12x1,25*
1635 01-M12x1,5*

Single Long Banjo Stem
Assembled with adjustable fittings
Mod. 6610, 6620, 1610, 1620, 2023, 1170
* = Models that can be assembled with
1/4 banjo fittings

Mod.
1631 02-1/8
1631 02-1/4
1631 02-3/8

Double Banjo Stem
Assembled with adjustable fittings
Mod. 6610, 6620, 1610, 1620, 2023, 1170

Mod.
1635 02-1/8
1635 02-1/4
1635 02-3/8
1635 02-1/2

Double Long Banjo Stem
Assembled with adjustable fittings
Mod. 6610, 6620, 1610, 1620, 2023, 1170

Mod.
1631 03-1/8
1631 03-1/4
1631 03-3/8

Triple Banjo Stem
Assembled with adjustable fittings
Mod. 6610, 6620, 1610, 1620, 2023, 1170

Mod.
1580 5/3
1580 6/4
1580 8/6
1580 10/8
1580 12/10
1580 15/12,5
1580 8/6-6/4
1580 10/8-6/4

Union Connector



Mod.
1590 5/3
1590 6/4
1590 8/6
1590 10/8
1590 12/10
1590 6/4-5/3
1590 8/6-6/4

Bulkhead Union Reducer



Mod.
1550 6/4
1550 8/6
1550 10/8
1550 12/10
1550 15/12,5

Elbow Connector



Mod.
1540 5/3
1540 6/4
1540 8/6
1540 10/8
1540 12/10
1540 15/12,5
1540 8/6-6/4
1540 10/8-6/4
1540 10/8-8/6

Tee Connector



Mod.
1600 6/4
1600 8/6

Cross Connector



Mod.
1470 6/4
1470 8/6

Adaptor with Junction



Mod.
2651 1/8
2651 1/4
2651 3/8
2651 1/2
2651 1

Aluminium Washer



Mod.
2661 M3
2661 M5
2661 M6
2661 1/8
2661 1/4
2661 3/8
2661 1/2

Plastic Washer



Mod.
2665 1/8
2665 1/4
2665 3/8
2665 1/2

Plastic Washer



Mod.
2669 1/8
2669 1/4
2669 3/8
2669 1/2

Plastic Washer



Mod.
1703 5/3-M7x0,75
1703 6/4-M8x0,75
1703 6/4-M10x1
1703 8/6-M12x1
1703 10/8-M14x1
1703 12/10-M16x1
1703 15/12,5-M20x1

Blocking nut



Mod.
1723 6/4-M10x1
1723 8/6-M12x1
1723 10/8-M14x1
1723 12/10-M16x1
1723 15/12,5-M20x1

Blocking nut with metal spring

Series 1000 universal nose fittings


Nose fittings for plastic, copper and brass tubes: \varnothing 4, 6, 8, 10, 12 mm

Fittings threads: BSP (G1/8, G1/4), BSPT (R1/8, R1/4, R3/8, R1/2)

Series 1000 nose fittings are used with plastic tubes as well as with copper, brass, steel and aluminium tubes.

These fittings, which are suitable for several applications, can be used within pneumatic, oil-pressure and low-pressure hydraulic circuits.

The fittings seats, noses and nuts comply with the DIN 3870-3861 standards.

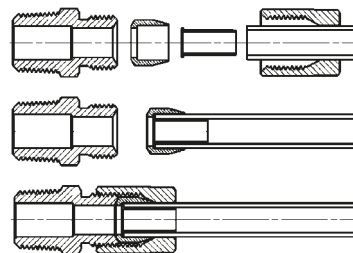

BSPT Male Connector

Mod.
1050 4-1/8
1050 6-1/8
1050 6-1/4
1050 8-1/8
1050 8-1/4
1050 8-3/8
1050 10-1/4
1050 10-3/8
1050 10-1/2
1050 12-1/4*
1050 12-3/8*
1050 12-1/2*

* = with bi-conical olive



BSP Female Connector

Mod.
1063 4-1/8
1063 6-1/8
1063 6-1/4
1063 8-1/8
1063 8-1/4



BSPT Fix Male Elbow

Mod.
1020 4-1/8
1020 6-1/8
1020 6-1/4
1020 8-1/8
1020 8-1/4
1020 8-3/8
1020 10-1/4
1020 10-3/8
1020 10-1/2
1020 12-1/4*
1020 12-3/8*
1020 12-1/2*

* = with bi-conical olive



BSP Female Elbow

Mod.
1093 4-1/8
1093 6-1/8
1093 6-1/4
1093 8-1/8
1093 8-1/4



BSPT Fix Male Tee

Mod.
1000 4-1/8
1000 6-1/8
1000 8-1/4
1000 10-1/4



Lateral BSPT Fix Male Tee

Mod.
1010 4-1/8
1010 6-1/8
1010 8-1/4
1010 10-1/4



Union Connector

Mod.
1230 4
1230 6
1230 8
1230 10
1230 12*

* = with bi-conical olive



Bulkhead Connector

Mod.
1250 4
1250 6
1250 8
1250 10



Elbow Connector

Mod.
1220 4
1220 6
1220 8
1220 10
1220 12*

* = with bi-conical olive



Tee Connector

Mod.
1210 4
1210 6
1210 8
1210 10
1210 12*

* = with bi-conical olive



Single Banjo
Assembled with
* = Mod. 1631, 1635, SCU, SCV, SCO...
° = Mod. 1635, SCU, SCV, SCO...



Blocking nut

Mod.
1303 4-1/8
1303 6-1/8
1303 8-1/4
1303 10-3/8
1303 12-M18x1,5



Olive and Bicone

Mod.
1310 4
1310 6
1310 8
1310 10
1310 12-M18*

* = bi-conical olive




Inserts

Mod.
1320 4
1320 6
1320 8
1320 10

Series S2000 pipe fittings Sprint®

Fittings threads: BSP (G1/8, G1/4, G3/8, G1/2), BSPT (R1/8, R1/4, R3/8, R1/2)

Series S2000 pipe fittings are characterized by great reliability of female threads, both BSP and BSPT, with non-flat surfaces. The patented Sprint models are provided with a particular torque system which avoids the use of liquid glues or PTFE band, making thus the mounting quicker. Thanks to this system the connection and disconnection of the fitting can be repeated several times without compromising the seal on the thread.



Mod.
S2500 1/8
S2500 1/4
S2500 3/8
S2500 1/2

BSPT Nipple *Sprint®*



Mod.
S2530 1/4-1/8
S2530 3/8-1/8
S2530 1/2-1/8
S2530 3/8-1/4
S2530 1/2-1/4
S2530 1/2-3/8

BSPT Reducing Nipple *Sprint®*



Mod.
S2520 1/8-1/8
S2520 1/8-1/4
S2520 1/8-3/8
S2520 1/4-1/4
S2520 1/4-3/8
S2520 1/4-1/2
S2520 3/8-3/8
S2520 3/8-1/2
S2520 1/2-1/2

BSPT Male Reducing Extension *Sprint®*



Mod.
S2510 1/8-1/4
S2510 1/8-3/8
S2510 1/4-3/8
S2510 1/4-1/2
S2510 3/8-1/2

BSPT Reducing *Sprint®*



Mod.
S2541 1/8-1/8
S2541 1/4-1/4
S2541 3/8-3/8

BSPT Swivel Male Nipple *Sprint®*



Mod.
S2010 1/8
S2010 1/4
S2010 3/8
S2010 1/2

BSPT Male Elbow *Sprint®*



Mod.
S2020 1/8-1/8
S2020 1/4-1/4
S2020 3/8-3/8
S2020 1/2-1/2

Male Female Elbow *Sprint®*



Mod.
S2050 1/8-1/8
S2050 1/4-1/4
S2050 3/8-3/8
S2050 1/2-1/2

M.M.F. Tee *Sprint®*



Mod.
S2060 1/8-1/8
S2060 1/4-1/4
S2060 3/8-3/8
S2060 1/2-1/2

F.M.F. Tee *Sprint®*



Mod.
S2070 1/8-1/8
S2070 1/4-1/4
S2070 3/8-3/8
S2070 1/2-1/2

M.F.F. Tee *Sprint®*



Mod.
S2080 1/8
S2080 1/4
S2080 3/8
S2080 1/2

Male Tee *Sprint®*



Mod.
S2090 1/8-1/8
S2090 1/4-1/4
S2090 3/8-3/8
S2090 1/2-1/2

M.F.M. Tee *Sprint®*



Mod.
S2612 M5
S2612 M7*
S2610 1/8
S2610 1/4
S2610 3/8
S2610 1/2

BSP Male Plug *Sprint®*
* = Metric Male Plug with O-Ring




Mod.
S2615 1/8
S2615 1/4
S2615 3/8

BSPT Male Plug Tapper *Sprint®*

Series 2000 pipe fittings

Fittings threads: metric (M5), BSP (G1/8, G1/4, G3/8, G1/2, G3/4, G1), BSPT (R1/8, R1/4, R3/8, R1/2, R3/4, R1)

The wide range of Camozzi pipe fittings, which includes straight, L and Tee, Cross piece male or female couplings, guarantees the necessary support during the design of compressed air systems.



Mod.
2500 1/8
2500 1/4
2500 3/8
2500 1/2
2500 3/4
2500 1

BSPT Nipple



Mod.
2501 M5
2501 1/8
2501 1/4
2501 3/8
2501 1/2

Metric-BSP Nipple



Mod.
2510 1/8-1/4
2510 1/8-3/8
2510 1/4-3/8
2510 1/4-1/2
2510 3/8-1/2
2510 1/2-3/4

BSPT Reducing Nipple



Mod.
2520 1/8-1/8
2520 1/8-1/4
2520 1/8-3/8
2520 1/4-1/4
2520 1/4-3/8
2520 1/4-1/2
2520 3/8-3/8
2520 3/8-1/2
2520 1/2-1/2

BSPT Male Reducing Extension



Mod.
2521 M5-1/8
2521 1/8-1/8
2521 1/8-1/4
2521 1/8-3/8
2521 1/4-1/4
2521 1/4-3/8
2521 1/4-1/2
2521 3/8-3/8
2521 3/8-1/2
2521 1/2-1/2

Metric-BSP Reducing Extension



Mod.
2511 M5-1/8
2511 1/8-1/4
2511 1/8-3/8
2511 1/4-3/8
2511 1/4-1/2
2511 3/8-1/2

Metric-BSP Reducing Nipple



Mod.
2525 1/8-16
2525 1/8-36
2525 1/4-27
2525 1/4-43

BSP Male Extension



Mod.
2530 1/4-1/8
2530 3/8-1/8
2530 1/2-1/8
2530 3/8-1/4
2530 1/2-1/4
2530 1/2-3/8
2530 3/4-3/8
2530 3/4-1/2
2530 1-1/2

BSPT Reducing



Mod.
2531 1/8-M5*
2531 1/4-1/8*
2531 3/8-1/8
2531 3/8-1/4*
2531 1/2-1/8
2531 1/2-1/4
2531 1/2-3/8*

* = with through-out thread

BSP Reducing



Mod.
2543 M5
2543 1/8
2543 1/4
2543 3/8
2543 1/2

Sleeve



Mod.
2553 M5-1/8
2553 1/8-1/4
2553 1/8-3/8
2553 1/8-1/2
2553 1/4-3/8
2553 1/4-1/2
2553 3/8-1/2

Reducing Sleeve



Mod.
2611 M5
2611 1/8
2611 1/4
2611 3/8
2611 1/2
2611 1

BSP Male Plug



Mod.
2610 3/4

BSPT Male Plug



Mod.
2613 1/8
2613 1/4
2613 3/8
2613 1/2

BSP Female Plug



Mod.
2601 2-M5
2601 4,5-M5
2601 7-1/8
2601 7-1/4
2601 8-1/8
2601 9-1/8
2601 9-1/4
2601 9-3/8

2601 12-1/4
2601 12-3/8
2601 12-1/2
2601 17-3/8
2601 17-1/2

Metric-BSP Male Hose Adaptor



Mod.
2013 1/8
2013 1/4
2013 3/8
2013 1/2

BSPT Female Elbow



Mod.
2010 1/8
2010 1/4
2010 3/8
2010 1/2
2010 3/4
2010 1

BSP Male Elbow



Mod.
2021 M5-M5*
2020 1/8-1/8
2020 1/4-1/4
2020 3/8-3/8
2020 1/2-1/2
2020 3/4-3/4
2020 1-1

BSPT Male Female Elbow
* = Metric Male Female Elbow


Mod.
2050 1/8-1/8
2050 1/4-1/4
2050 3/8-3/8
2050 1/2-1/2

M.M.F. Tee



Mod.
2060 1/8-1/8
2060 1/4-1/4
2060 3/8-3/8
2060 1/2-1/2

F.M.F. Tee



Mod.
2080 1/8
2080 1/4
2080 3/8
2080 1/2
2080 3/4
2080 1

Male Tee



Mod.
2070 1/8-1/8
2070 1/4-1/4
2070 3/8-3/8
2070 1/2-1/2

M.F.F. Tee



Mod.
2090 1/8-1/8
2090 1/4-1/4
2090 3/8-3/8
2090 1/2-1/2
2090 3/4-3/4
2090 1-1

M.F.M. Tee



Mod.
2003 1/8
2003 1/4
2003 3/8
2003 1/2

Female Tee



Mod.
2040 1/8-1/8
2040 1/4-1/4
2040 3/8-3/8
2040 1/2-1/2

Y.F.M.F.



Mod.
2043 1/8
2043 1/4
2043 3/8
2043 1/2

Female Y



Mod.
2033 1/8
2033 1/4
2033 3/8

Female Cross



Mod.
2023 M5-M5*
2023 M5-M6°
2023 1/8-1/8*
2023 1/4-1/4^
2023 3/8-3/8^

Single Thread Banjo
Assembled with:
° = Mod. 1631
° = Mod. SCU, SVU, SCO...
* = Mod. 1631, 1635, SCU, SVU, SCO...
^ = Mod. 1635, SCU, SVU, SCO...



Mod.
3033 1/8
3033 1/4
3033 3/8
3033 1/2

4 Ways Distribution Block with fixing holes
Material: anodized Aluminium

Manifold with double lateral outlets
Material: anodized Aluminium

Mod.
3043 1/4-3D-1/8
3043 1/4-4D-1/8
3043 1/4-5D-1/8
3043 1/4-6D-1/8
3043 3/8-3D-1/4
3043 3/8-4D-1/4
3043 3/8-5D-1/4
3043 3/8-6D-1/4
3043 1/2-3D-3/8
3043 1/2-4D-3/8
3043 1/2-5D-3/8
3043 1/2-6D-3/8



Mod.
3053 1/4-3L-1/8
3053 1/4-4L-1/8
3053 1/4-5L-1/8
3053 1/4-6L-1/8
3053 3/8-3L-1/4
3053 3/8-4L-1/4
3053 3/8-5L-1/4
3053 3/8-6L-1/4
3053 1/2-3L-3/8
3053 1/2-4L-3/8
3053 1/2-5L-3/8
3053 1/2-6L-3/8

Manifold with lateral outlets
Material: anodized Aluminium

Tubing, spirals and accessories

Tubes: reinforced PVC, Polyamide PA12, Hytrel Polyester, Polyethylene, PU

Diameters: 4/2, 5/3, 6/4, 8/6, 10/8, 12/10, 15/12,5 mm

Camozzi offers a range of tubes and spirals with specific features which are suitable for several technical requirements. Thanks to high-quality raw materials and with a low specific weight, these products are very small and lightweight. They also show high resistance against stress and flexural vibrations.

The high specularity of internal surfaces for the fluid passage (roughness of about 6 micron) allows to reduce the loosening of loads and to reach very high flows with same diameters. Technopolymers used are particularly resistant to aging, thus ensuring the product a very long life.



Mod.
PV 6/4
PV 8/6
PV 10/8
PV 12/10
PV 15/12,5

Tube in reinforced PVC
Standard colour: Blue



Mod.
TRN 4/2
TRN 5/3
TRN 6/4
TRN 8/6
TRN 10/8
TRN 12/10

Tube in polyamide PA12
Standard colour: Neutral
Colours available on request:
Blue - Red - Green - Black - Yellow



Mod.
TRH 4/2-Z
TRH 5/3-Z
TRH 6/4-Z
TRH 8/6-Z
TRH 10/8-Z
TRH 12/10-Z

Tubes in Hytrel polyester
Standard colour: Blue
Colours available on request:
Red - Green - Black - Yellow - White



Mod.
TPE 5/3
TPE 6/4
TPE 8/6
TPE 10/8

Tube in low density polyethylene
Standard color: Neutral
Colour available on request: Blue



Mod.
TPC 4/2
TPC 6/4
TPC 8/6
TPC 10/8
TPC 12/8

Tubes in Polyurethane 98 Shore
Standard colour: Grey RAL 7012



Mod.
TSP 6/4
TSP 8/6
TSP 10/8
TSP 12/10

Spiral in Rilsan (PA 11)
Standard colour: Blue
Other colours available on request



Mod.
MPL-4
MPL-6
MPL-8
MPL-10
MPL-12
MPL-14

Plastic tubes clamps
Colour: Blue



Mod.
PNZ-12
PNZ-25

Small and large tubes cutter
Replacement blades can be ordered separately



Mod.
PNZP-12

Plastic tubes cutter

Series 5000 quick-release couplings


Nominal diameters: 5, 7 mm





























Couplings threads: G1/8, G1/4, G3/8, G1/2

Plastic tubes: 6/4, 8/6, 10/8; rubber hoses: 6x14, 8x17, 10x19, 13x23

Series 5000 quick-release couplings are suitable in situations where, for plant engineering or safety reasons, the connection or disconnection of tubing must be repeated several times. These operations can be performed with no need to release the pressure and therefore a considerable amount of time can be saved.

Series 5000 quick-release couplings with mini-profile DN 5 are compatible with couplings Rectus Series 21 - 90, Legris 21. Series 5000 quick-release couplings with European profile DN 7 are compatible with couplings Cejn Series 320.



 <p>Mod. 5051 1/8 5051 1/4 5081 1/4 5081 3/8 5081 1/2</p> <p>BSP Male Quick Coupling</p> 	 <p>Mod. 5052 1/8 5052 1/4 5082 1/4</p> <p>BSP Male Quick Coupling Bulkhead</p> 	 <p>Mod. 5053 1/8 5053 1/4 5083 1/4 5083 3/8 5083 1/2</p> <p>BSP Female Quick Coupling</p> 
 <p>Mod. 5054 6/4 5054 8/6 5084 8/6 5084 10/8</p> <p>Quick Coupling Push-on</p> 	 <p>Mod. 5055 6/4 5055 8/6</p> <p>Quick Coupling Bulkhead Push-on</p> 	 <p>Mod. 5056 06 5056 09 5086 09 5086 12</p> <p>Quick Coupling Hose Adapter</p> 
 <p>Mod. 5057 6x14 5087 6x14 5087 8x17 5087 10x19 5087 13x23</p> <p>Quick Coupling Hose Connector</p> 	 <p>Mod. 5058 6/4 5058 8/6 5088 8/6 5088 10/8</p> <p>Quick Coupling with Spring</p> 	 <p>Mod. 5150 1/8 5150 1/4 5180 1/4 5180 3/8 5180 1/2</p> <p>Male Connector</p> 
 <p>Mod. 5350 1/8 5350 1/4 5380 1/4 5380 3/8 5380 1/2</p> <p>Female Connector</p> 	 <p>Mod. 5450 6/4 5450 8/6 5480 8/6 5480 10/8</p> <p>Push-on Connector</p> 	 <p>Mod. 5650 06 5650 09 5680 06 5680 09 5680 12</p> <p>Connector with Barb</p> 
 <p>Mod. 5750 6x14 5780 6x14 5780 8x17 5780 13x23</p> <p>Hose Connector</p> 	 <p>Mod. 5850 6/4 5850 8/6 5880 8/6 5880 10/8</p> <p>Connector with Spring</p> 	

Series 5000L and 5000LT quick-release couplings for the conditioning of moulds for plastics


New

Nominal diameters: 5, 7 mm


Couplings threads: G1/8, G1/4, G3/8

The Series 5000L and 5000LT couplings have been designed to connect tubes for water, air or oil, used within plastic injection and die casting moulds.

The Series 5000L and 5000LT couplings provide a quick connection and disconnection method for the replacement of heating and conditioning tubes directed towards the mould, as well as tubes coming from water collectors or sources.





Couplings type "L"



Couplings type "LT"



Mod.
5053L 1/8
5053L 1/4
5053LT 1/8
5053LT 1/4



BSP female
quick-coupling




Mod.
5083L 1/4
5083L 3/8
5083LT 1/4
5083LT 3/8



BSP female
quick-coupling



Mod.
5150L 1/8
5150L 1/4
5180L 1/4
5180L 3/8



Male connector

5 > Vacuum



Suction pads

		Page
Series VTCF	 Flat suction pads (round) Universal suction pads in NBR or Silicone, ideal for a wide range of applications. Diameters from 3.5 to 95 mm with thread size M3, M5, G1/8, G1/4, both male and female.	181
Series VTOF	 Flat suction pads (oval) Flat suction pads in NBR or Silicone which thanks to their oval shape, can be used to handle narrow and long workpieces. Diameters from 7x3,5 to 60x20 mm with thread size M3, M5, G1/8, G1/4, both male and female.	182
Series VTCL	 Bellows suction pads (round) (1,5 folds) Bellows suction pads available in NBR or Silicone which allow an optimal damping when placed on the workpiece. Diameters from 11 to 53 mm with thread size M5, G1/8, G1/4, both male and female.	183
Series VTCN	 Bellows suction pads (round) (2,5 folds) Bellows suction pads available in NBR or Silicone, are suitable to handle uneven workpiece surfaces or workpiece with major height differences. Diameters from 5 to 52 mm with thread size M5, G1/8, G1/4, both male and female.	184

Ejectors based on Venturi principle

		Page
Series VEB	Basic ejectors Basic ejectors with no moving parts, based on the Venturi principle. Version "L" for porosive workpieces. Version "H" for high vacuum value.	185
Series VEBL	Basic ejectors Basic ejectors in technopolymer without moving parts, based on the Venturi principle. Different sizes available, with internal nozzle from 0,5 to 2,5 mm and with suction rate from 8 to 207 l/min.	185
Series VED	Inline ejectors Vacuum ejectors without moving parts, based on the Venturi principle, used for direct installation on suction pads.	186
Series VEDL	Inline ejectors Vacuum compact ejectors in technopolymer without moving parts, based on the Venturi principle, used for direct installation on suction pads. Available in two sizes with internal nozzle of 0,5 and 0,7 mm and with suction rate from 8 to 16 l/min.	186
Series VEC	Compact ejectors Vacuum generators with integrated valves and monitoring system. Possibility to command suction and blow-off individually without using external valves.	187
Series VEM	Compact ejectors Miniaturized vacuum generators with integrated valves and monitoring system. Possibility to command suction and blow-off individually without using external valves.	188

Accessories

		Page
Series NPF	Flexible suction pad mountings The vulcanisation provides flexibility in all directions. Thread G1/4.	189
Series NPM, NPR	Spring plungers The spring plungers are used in situations where significant height differences of the workpiece have to be compensated for. Thread size M3, M5, G1/8, G1/4, plunger stroke length from 5 to 75 mm.	189
Series VNV	Check valves These check valves are mainly used on vacuum gripper systems containing multiple suction pads in order to shut off individual suction pads which are not covered. Thread size M5, G1/8, G1/4, G3/8, G1/2.	189

Filters

		Page
Series FVD	Inline vacuum filters For use in vacuum systems with minor to medium levels of dirt. Direct mounting on the suction pad.	190
Series FVT	Vacuum cup filters Used as pre-filters and fine filters for air with varying amounts of contamination, for the protection of the vacuum generator. Mounted as protection for the ejector.	190

Pressure / vacuum switches

See chapter 2

Series VTCF flat suction pads (round)

Universal suction pads in NBR or Silicone, ideal for a wide range of applications
Diameters from 3.5 to 95 mm with thread size M3, M5, G1/8, G1/4, both male and female



CODING EXAMPLE

VT	C	F	-	0035	N	-	M3	M
VT	SERIES: VT = suction pad							
C	SHAPE: C = round							
F	VERSION: F = flat							
0035	DIAMETERS: 0035 = 3,5 mm 0050 = 5,0 mm 0080 = 8,0 mm 0100 = 10,0 mm 0150 = 15,0 mm 0200 = 20,0 mm 0250 = 25,0 mm 0300 = 30,0 mm 0350 = 35,0 mm 0400 = 40,0 mm 0500 = 50,0 mm 0600 = 60,0 mm 0800 = 80,0 mm 0950 = 95,0 mm							
N	MATERIALS: N = NBR S = Silicone							
M3	THREAD SIZE: M3 = M3 M5 = M5 1/8 = G1/8 1/4 = G1/4							
M	THREAD: M = male F = female							

Series VTOF flat suction pads (oval)

Flat suction pads in NBR or Silicone which, thanks to their oval shape, can be used to handle narrow and long workpieces.

Diameters from 7x3,5 to 60x20 mm with thread size M3, M5, G1/8, G1/4, both male and female



CODING EXAMPLE

VT	O	F	-	0070-035	N	-	M3	M
----	---	---	---	----------	---	---	----	---

VT	SERIES: VT = suction pad
O	SHAPE: O = oval
F	VERSION: F = flat
0070-035	DIMENSIONS: 0070-035 = 7,0 x 3,5 mm 0150-050 = 15,0 x 5,0 mm 0180-060 = 18,0 x 6,0 mm 0300-100 = 30,0 x 10,0 mm 0450-150 = 45,0 x 15,0 mm 0600-200 = 60,0 x 20,0 mm
N	MATERIALS: N = NBR S = Silicone
M3	THREAD SIZE: M3 = M3 M5 = M5 1/8 = G1/8 1/4 = G1/4
M	THREAD: M = male F = female

Series VTCL (1,5 folds) bellows suction pads (round)

Bellows suction pads Series VTCL available in NBR or Silicone

which allow an optimal damping when placed on the workpiece

Diameters from 11 to 53 mm with thread size M5, G1/8, G1/4, both male and female



CODING EXAMPLE

VT	C	L	-	110	N	-	M5	M
----	---	---	---	-----	---	---	----	---

VT SERIES:
VT = suction pad

C SHAPE:
C = round

L VERSION:
L = bellows 1,5 folds

110 DIAMETERS:
110 = 11,0 mm
140 = 14,0 mm
160 = 16,0 mm
200 = 20,0 mm
250 = 25,0 mm
330 = 33,0 mm
430 = 43,0 mm
530 = 53,0 mm

N MATERIALS:
N = NBR
S = Silicone

M5 THREAD SIZE:
M5 = M5
1/8 = G1/8
1/4 = G1/4

M THREAD:
M = male
F = female

Series VTCN (2,5 folds) bellows suction pads (round)

Bellows suction pads Series VTCN, available in NBR or Silicone, are suitable to handle uneven workpiece surfaces or workpiece major height differences

Diameters from 5 to 52 mm with thread size M5, G1/8, G1/4, both male and female



CODING EXAMPLE

VT	C	N	-	050	N	-	M5	M
----	---	---	---	-----	---	---	----	---

VT SERIES:
VT = suction pad

C SHAPE:
C = round

N VERSION:
N = 2,5 bellows

050 DIAMETERS:
050 = 5,0 mm
070 = 7,0 mm
090 = 9,0 mm
120 = 12,0 mm
140 = 14,0 mm
180 = 18,0 mm
200 = 20,0 mm
250 = 25,0 mm
320 = 32,0 mm
420 = 42,0 mm
520 = 52,0 mm


N MATERIALS:
N = NBR
S = Silicone

M5 THREAD SIZE:
M5 = M5
1/8 = G1/8
1/4 = G1/4

M THREAD:
M = male
F = female

Series VEB basic ejectors

Basic ejectors with no moving parts, based on the Venturi principle
Version "L" for porosive workpieces, version "H" for high vacuum value

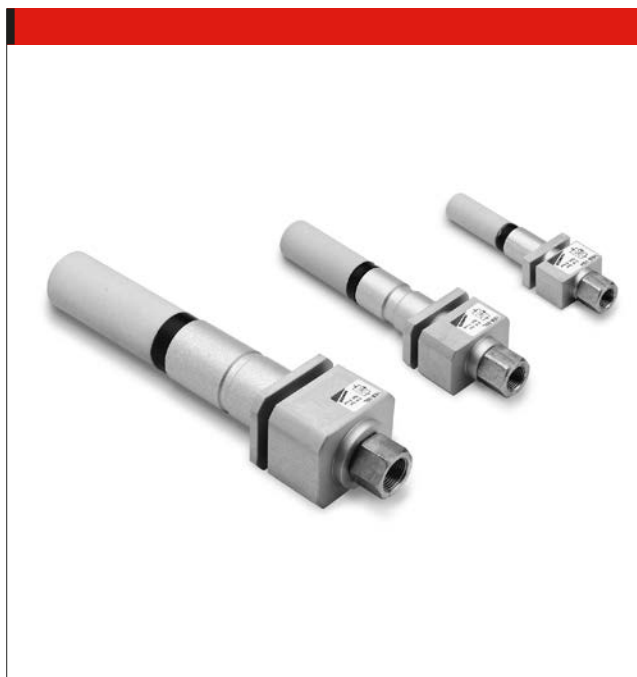

CODING EXAMPLE

VE	B	-	05	H
----	---	---	----	---

VE SERIES:
VE = vacuum ejector

B VERSION:
B = basic

05 NOZZLE DIAMETER (MM):
05 = 0,5 mm
07 = 0,7 mm
10 = 1 mm
15 = 1,5 mm
20 = 2 mm
25 = 2,5 mm
30 = 3 mm

H SUCTION TYPE:
H = high vacuum
L = high suction rate

Series VEBL basic ejectors

Basic ejectors in technopolymer without moving parts, based on the Venturi principle
Different sizes available, with internal nozzle from 0,5 to 2,5 mm and with suction rate from 8 to 207 l/min



CODING EXAMPLE

VE	BL	-	10H	-	T2
----	----	---	-----	---	----

VE SERIES:
VE = vacuum ejector

BL VERSION:
BL = basic light

10H NOZZLE DIAMETER:
05H = 0,5 mm
07H = 0,7 mm
10H = 1 mm
15H = 1,5 mm
20H = 2 mm
25H = 2,5 mm

T2 TYPE OF CONNECTION (ON SUPPLY SIDE):
T1 = plier - tube Ø4
T2 = plier - tube Ø6
T3 = plier - tube Ø8

Accessories

Bracket-foot
Mod. VEBL-ST



Fixing elements
Mod. VEBL-PCF



Series VED inline ejectors

Vacuum ejectors without moving parts, based on the Venturi principle, used for direct installation on suction pads



CODING EXAMPLE

VE	D	-	07
VE	SERIES: VE = vacuum ejectors		
D	VERSION: D = in-line		
07	NOZZLE DIAMETER: 07 = 0,7 mm 09 = 0,9 mm		

Series VEDL inline ejectors

Vacuum compact ejectors in technopolymer without moving parts, based on the Venturi principle, used for direct installation on suction pads
Available in two sizes with internal nozzle of 0,5 and 0,7 mm and with suction rate from 8 to 16 l/min



CODING EXAMPLE

VE	DL	-	05	-	T1
VE	SERIES: VE = vacuum ejector				
DL	VERSION: DL = inline light				
05	NOZZLE DIAMETER: 05 = 0,5 mm 07 = 0,7 mm				
T1	TYPE OF CONNECTION (ON SUPPLY SIDE): T1 = plier - tube Ø4				

Series VEC compact ejectors

Vacuum generators with integrated valves and monitoring system

Possibility to command suction and blow-off individually without using external valves



CODING EXAMPLE

VE	C	-	10	C	2	-	RD
----	---	---	----	---	---	---	----

VE SERIES:
VE = vacuum ejector

C VERSION:
C = compact

10 NOZZLE DIAMETER (mm):
10 = 1,0 mm
15 = 1,5 mm
20 = 2,0 mm
25 = 2,5 mm

C VALVE FUNCTION:
C = NC (suction OFF when not activated)
A = NO (suction ON when not activated)

2 VERSION:
2 = with Blow-off valve

RD VERSION:
* RD = with air saving system and digital vacuum switch (with display). It is supplied complete with connectors and cables.
* RE = with air saving system and electronic vacuum switch. It is supplied complete with connectors and cables.
VD = without air saving system, digital vacuum switch (with display)
VE = without air saving system, with electronic vacuum switch

* = The air saving circuit, where used, switches the suction signal to "ON" apart from the fact that the ejector is NC or NO; this means that, in order to switch the internal loop back to "OFF", it is necessary to activate the signal on the coil controlling it (green cable).

Accessories

Connectors with crimped cable
for Mod. VEC-10 and VEC-15
Mod. **121-803**
121-806
121-810
121-830



Connectors DIN 43650 pin spacing 8 mm
for Mod. VEC-20 and VEC-25
Mod. **126-550-1**
126-800
126-701



Circular M8 4-pole connectors, Female
With PU sheathing, non shielded cable
Protection class: IP65
Mod. **CS-DF04EG-E200**
CS-DF04EG-E500
CS-DR04EG-E200
CS-DR04EG-E500



Series VEM compact ejectors

Miniaturized vacuum generators with integrated valves and monitoring system
Possibility to command suction and blow-off individually without using external valves



CODING EXAMPLE

VE	M	-	05	C	2	-	VE
----	---	---	----	---	---	---	----

VE SERIES:
VE = vacuum ejector

M VERSION:
M = compact, mini

05 NOZZLE DIAMETER:
05 = 0,5 mm
07 = 0,7 mm
10 = 1,0 mm

C VALVE FUNCTION:
C = NC (suction OFF when not activated)
A = NO (suction ON when not activated)

2 VERSION:
2 = with Blow-off valve

VE VALVE TYPE:
VE = without air saving system, with electronic vacuum switch

Accessories

Connectors with crimped cable

Mod. 121-803
121-806
121-810



Circular M8 4-pole connectors, Female

With PU sheathing, non shielded cable
Protection class: IP65

Mod. CS-DF04EG-E200
CS-DF04EG-E500
CS-DR04EG-E200
CS-DR04EG-E500



Series NPF flexible suction pad mountings

The vulcanisation provides flexibility in all directions
Thread G1/4



CODING EXAMPLE

NPF	-	FM	-	1/4	-	M10 X 1,25
-----	---	----	---	-----	---	------------

NPF	SERIES: NPF = flexible suction pad mountings
-----	---

FM	THREAD VERSION: FM = G1 Female / G2 Male
----	---

1/4	FEMALE THREAD G1: 1/4 = G1/4
-----	---------------------------------

M10x1,25	MALE THREAD G2: M10x1,25 = M10x1,25 1/4 = G1/4
----------	--

Series NPM and NPR (non rotating) spring plungers

The spring plungers are used in situations where significant height differences of the workpiece have to be compensated for
Thread size M3, M5, G1/8, G1/4, plunger stroke length from 5 to 75 mm



CODING EXAMPLE

NPM	-	FM	-	1/4	-	75
-----	---	----	---	-----	---	----

NPM	SERIES: NPM = spring plunger NPR = spring plunger - non-rotating
-----	--

FM	THREAD VERSION: FM = female / male FF = female / female
----	---

1/4	THREAD: M3 = M3 M5 = M5 1/8 = G1/8 1/4 = G1/4
-----	---

75	COMPENSATION STROKE: 05 = 5 mm - 10 = 10 mm - 15 = 15 mm - 20 = 20 mm 25 = 25 mm - 50 = 50 mm - 75 = 75 mm
----	--

Series VNV check valves

These check valves are mainly used on vacuum gripper systems containing multiple suction pads in order to shut off individual suction pads which are not covered
Thread size M5, G1/8, G1/4, G3/8, G1/2



CODING EXAMPLE

VNV	-	MF	-	M5
-----	---	----	---	----

VNV	SERIES: VNV = check valve
-----	------------------------------

MF	THREAD VERSION: MF = G1 male / G2 female FM = G1 female / G2 male
----	---

M5	THREAD: M5 = M5 1/8 = G1/8 1/4 = G1/4 1/2 = G1/2
----	--

Series FVD inline vacuum filters

For use in vacuum systems with minor to medium levels of dirt
Direct mounting on the suction pad



CODING EXAMPLE

FVD	-	6/4	-	50
-----	---	-----	---	----

FVD SERIES:
FVD = inline filter

6/4 CONNECTIONS:
6/4 = tube 6
8/6 = tube 8

50 FILTER ELEMENT:
50 = 50 µm

Series FVT vacuum cup filters

Used as pre-filters and fine filters for air with varying amounts of contamination,
for the protection of the vacuum generator. Mounted as protection for the ejector



CODING EXAMPLE

FVT	-	FF	-	1/4	-	80
-----	---	----	---	-----	---	----

FVT SERIES:
FVT = cup filter

FF THREAD SIZE:
FF = female-female

1/4 CONNECTIONS:
1/8 = G1/8
1/4 = G1/4
3/8 = G3/8
1/2 = G1/2
3/4 = G3/4

80 FILTER ELEMENT:
80 = 80 µm

Accessories

Mounting foot bracket

The mod. **FVT-FF-1/8-80-B** is used on cup filters with ports G1/8, G1/4, G3/8 and G1/2.

The mod. **FVT-FF-3/4-80-B** is used on cup filters with ports G3/4.



Camozzi in the world

Camozzi spa
Società Unipersonale
Via Eritrea, 20/I
25126 Brescia
Italy
Tel. +39 030/37921
Fax +39 030/2400430
info@camozzi.com
www.camozzi.com

Camozzi Neumatica S.A.
Prof. Dr. Pedro Chutro 3048
1437 Buenos Aires
Argentina
Tel. +54 11/49110816
Fax +54 11/49124191
info@camozzi.com.ar
www.camozzi.com.ar

Camozzi GmbH Pneumatic
Löfflerweg 18
A-6060 Hall in Tirol
Austria
Tel. +43 5223/52888-0
Fax +43 5223/52888-500
info@camozzi.at
www.camozzi.at

Camozzi do Brasil Ltda.
Rua Estácio de Sá, 1042
13080-010 Campinas SP
Brazil
Tel. +55 19/21374500
Fax +55 19/21374530
sac@camozzi.com.br
www.camozzi.com.br

Camozzi Pneumatic
66-1, Perehodnaya str.,
220070, Minsk
Belarus
Tel. +375 17/3961170 (71)
Fax +375 17/3961170 (71)
info@camozzi.by
www.camozzi.by

**Shanghai Camozzi Pneumatic
Control Components Co, Ltd.**
717 Shuang Dan Road, Malu Town
201801 Jiading Ind. District Shanghai
China
Tel. +86 21/65363650 - 59100999
Fax +86 21/65360613 - 59100333
info@camozzi.com.cn
www.camozzi.com.cn

**Shanghai Camozzi Automation
Control Co, Ltd.**
717 Shuang Dan Road, Malu Town
201801 Jiading Ind. District Shanghai
China
Tel. +86 21/59100999
Fax +86 21/59100333
info@camozzi.com.cn
www.camozzi.com.cn

Camozzi S.r.o.
V Chotejně 700/7
Praha - 102 00
Czech Republic
Tel. +420 272/690 994
Fax +420 272/700 485
info@camozzi.cz

Camozzi ApS
Metalvej 7 F
4000 Roskilde
Denmark
Tel. +45 46/750202
info@camozzi.dk
www.camozzi.dk

Camozzi Automation OÜ
Osmussaare 8-B204
13811 Tallinn
Estonia
Tel. +372 6119055
Fax +372 6119055
info@camozzi.ee
www.camozzi.ee

Camozzi Pneumatique Sarl
5, Rue Louis Gattefossé
Parc de la Bandonnière
69800 Saint Priest
France
Tel. +33 (0)478/213408
Fax +33 (0)472/280136
info@camozzi.fr
www.camozzi.fr

Camozzi GmbH Pneumatic
Porschestraße 1
D-73095 Albershausen
Germany
Tel. +49 7161/91010-0
Fax +49 7161/91010-99
info@camozzi.de
www.camozzi.de

Camozzi India Private Limited
No D-44 Phase II Ext.,
Hosiery Complex
Noida - 201 305
Uttar Pradesh
India
Tel. +91 120/4055252
Fax +91 120/4055200
info@camozzi-india.com
www.camozzi.in

**Camozzi Pneumatic
Kazakhstan LLP**
Shevchenko/Radostovets,
165b/72g, off. 615
050009 Almaty
Kazakhstan
Tel. +7 727/3335334 - 3236250
Fax +7 727/2377716 (17)
info@camozzi.kz
www.camozzi.kz

Camozzi Malaysia SDN. BHD.
30 & 32, Jalan Industri USJ 1/3
Taman Perindustrian USJ 1
47600 Subang Jaya
Selangor
Malaysia
Tel. +60 3/80238400
Fax +60 3/80235626
cammal@camozzi.com.my
www.camozzi.com.my

**Camozzi Neumatica de Mexico
S.A. de C.V.**
Lago Tanganica 707
Col. Ocho Cedros 2ª sección
50170 Toluca
México
Tel. +52 722/2707880 - 2126283
Fax +52 722/2707860
camozzi@camozzi.com.mx
www.camozzi.com.mx

Camozzi AS
Verstedveien 8
1400 Ski
Norway
Tel. +47 40644920
info@camozzi.no
www.camozzi.no

Camozzi Pneumatic LLC
Leningrad highway, 69, 1
RIVER CITY office 23, 2nd Floor
125445, Moscow
Russian Federation
Tel. +7 495/6650255
Fax +7 495/6650255
info@camozzi.ru
www.camozzi.ru

Camozzi Pneumatik AB
Box 9214
Bronsyxegatan 7
20039 Malmö
Sweden
Tel. +46 40/6005800
info@camozzi.se
www.camozzi.se

Camozzi Benelux B.V.
De Vijf Boeken 1 A
2911 BL Nieuwerkerk a/d IJssel
The Netherlands
Tel. +31 180/316677
Fax +31 180/316616
info@camozzi.nl
www.camozzi.nl

LLC Camozzi
Kirillovskaya Str, 1-3, section "D"
Kiev - 04080
Ukraine
Tel. +38 044/5369520
Fax +38 044/5369520
info@camozzi.ua
www.camozzi.ua

Camozzi Pneumatics Ltd.
The Fluid Power Centre
Watling Street
Nuneaton, Warwickshire
CV11 6BQ
United Kingdom
Tel. +44 (0)24/76374114
Fax +44 (0)24/76347520
info@camozzi.co.uk
www.camozzi.co.uk

Camozzi Pneumatics Inc.
Street address:
2160 Redbud Boulevard, Suite 101
McKinney, TX 75069-8252
Remittances:
P.O. Box 678518
Dallas, TX 75267-8518
USA
Tel. +1 972/5488885
Fax +1 972/5482110
info@camozzi-usa.com
www.camozzi-usa.com

Camozzi Venezuela S.A.
Calle 146 con Av. 62
N°146-180
P.O. Box 529
Zona Industrial Maracaibo
Edo. Zulia
Venezuela
Tel. +58 261/7360821
Fax +58 261/7360401
info@camozzi.com.ve
www.camozzi.com.ve

**Camozzi R.O.
in Hochiminh City**
6th Floor, Master Building,
155 Hai Ba Trung St.,
Ward 6, District 3
Hochiminh City
Vietnam
Tel. +84 8/54477588
Fax +84 8/54477877
bthhien@camozzi.com.vn
www.camozzi.com.vn

*Camozzi
distributors
in the world*

Europe

ZULEX d.o.o.
Safeta Zajke 115b
Sarajevo
Bosnia-Herzegovina
Tel. +387 33/776580
Fax +387 33/776583
zulex@bih.net.ba
www.zulex.com.ba

L.D. GmbH
Zar Samuil Str. 116
1202 Sofia
Bulgary
Tel. +359 2/9269011
Fax +359 2/9269025
camozzi@ld-gmbh.com
www.ld-gmbh.com

Bibus Zagreb d.o.o.
Anina 91
HR 10000 Zagreb
Croatia
Tel. +385 1/3818004 - 3818006
Fax +385 1/3818005
bibus@bibus.hr
www.bibus.hr

TS Hydropower Ltd.
Industrial Area N°64
Aglanzia 21-03
Nicosia
Cyprus
Tel. +357 22/332085
Fax +357 22/338608
tshydro@cytanet.com.cy

AVS-Yhtiöt Oy
Rusthollarinkatu 8
02270 Espoo
Finland
Tel. +358 10/6137100
Fax +358 10/6137701
info@avs-yhtiot.fi
www.avs-yhtiot.fi

Technomatic control s.a.
Esopou Street
Kalohori
570 09 Thessaloniki
Greece
Tel. +30 2310/778730
Fax +30 2310/778732
info@technomatic.gr
www.technomatic.gr

Tech-Con Hungária Kft
Véső u. 9-11 (entrance: Süllő u. 8.)
1133 Budapest
Hungary
Tel. +36 1/412 4161
Fax +36 1/412 4171
tech-con@tech-con.hu
www.tech-con.hu

Loft & Raftæki
Hjallabrekka 1
200 Kópavogur
Iceland
Tel. +354 564/3000
Fax +354 564/0030
gummi@loft.is
www.loft.is

DBF TECHNIC SIA
Bauskas iela 20 - 302
1004 Riga
Latvia
Tel. +371 296 26916
Fax +371 6 7808650
info@pneimatika.lv
www.pneimatika.lv

Hidroteka Engineering Services
Chemijos 29E
LT-51333 Kaunas
Lithuania
Tel. +370 37/452969
Fax +370 37/760500
hidroteka@hidroteka.lt
www.hidroteka.lt

Rayair Automation Ltd.
KW23G - Corradino Ind. Estate
Paola, PLA3000
Paola, Pla 08
Malta
Tel. +356 21/672497
Fax +356 21/805181
sales@rayair-automation.com
www.rayair-automation.com

Bibus Menos Sp. z o.o.
ul. Spadochroniarzy 18
80-298 Gdańsk
Poland
Tel. +48 58/6609570
Fax +48 58/6617132
info@bibusmenos.pl
www.bibusmenos.pl

**Teclena - Automatizacão,
Estudos e Representações, S.A.**
Rua Dos Camponeses, n° 390
Zona Industrial do Vale Sepal
2400-316 Leiria
Portugal
Tel. +351 244/860980
Fax +351 244/812832
geral@teclena.pt
www.teclena.pt

Experts d.o.o.
Mitropolit Teodosij Gologanov, 149
MK-1000 Skopje
Rep. of Macedonia
Tel. +389 2/3081970
Fax +389 2/3084871
experts@t-home.mk
www.experts.com.mk

Tech-Con Industry Srl
Calea Crângasi N°60
Sector 6 , 060346 Bucharest
Romania
Tel. +40 21/2219640
Fax +40 21/2219766
paul.stoica@tech-congroup.com
www.tech-con.ro

Tech-Con d.o.o. Beograd
Cara Dušana 205a
11080 Zemun - Belgrade
Serbia
Tel. +381 11/4142790
Fax +381 11/3166760
office@tech-con.rs
www.tech-con.rs

STAF Automation s.r.o.
Kostiviarska 4944/5
974 01 Banská Bystrica
Slovakia
Tel. +421 48/4722777
Fax +421 48/4722755
staf@staf.sk
www.staf.sk

Kovimex d.o.o.
Podskrajnik 60,
SI-1380 Cerknica
Slovenia
Tel. +386 1/7096430
Fax +386 1/7051930
kovimex@kovimex.si

Esperia S.A.
Arangutxi, 13
Poligono Industrial De Jundiz
01015 Vitoria
Spain
Tel. +34 945/290105
Fax +34 945/290356
comercial@esperia.es
www.esperia.es

Bibus AG
Allmendstrasse 26
CH-8320 Fehraltorf
Switzerland
Tel. +41 44/8775011
Fax +41 44/8775019
info.bag@bibus.ch
www.bibus.ch

**Hidrel Hidrolik Elemanlar
Sanayi Ve Ticaret A.S.**
Perçemli Sokak, No 11 Tünel Mevki
80000 Karakoy - Istanbul
Turkey
Tel. +90 212/2517318 - 2494881
Fax +90 212/2920850
hidrel@superonline.com

>>

*Camozzi
distributors
in the world*

America

Marco Industrial spa
Los Gobellinos # 2584 - Renca
Santiago
Chile
Tel. +56 22782 4400
Fax +56 22646 4623
marcoindustrial@marco.cl
www.marcoindustrial.cl

Euroindustrial Ltda
Carrera 25A # 4B-64
Bogotá
Colombia
Tel. +57 1/5606140
Fax +57 1/5609576
www.euro-industrial.net

Eurotécnica de Costa Rica AYM, S.A.
150 m oeste del cruce de Llorente,
hacia Epa Tibás
Costa Rica
Tel. +506 2241/4242 - 4230
Fax +506 2241/4272
eurotecnic@eurotecnicacr.com
www.eurotecnicacr.com

LT Industrial, EIRL
Ave. Charles Summer #53, suite 24B
Plaza Charles Summer
Santo Domingo
Dominican Republic
Tel. +1809-623-5156
Fax +1829-956-7205
info@ltindustrialrd.com

Fluidica Cia. Ltda.
Abelardo Moncayo Oe4-08 y Av. América
Quito, Pichincha
Ecuador
Tel. +593 2/2440848 - 2/5102004
Fax +593 2/2440848
info@fluidica-ec.com
www.fluidica-ec.com

Aplitec S.A. de C.V.
75 Av. Nte,
Residencial Escalón Norte II
Pje KL #3-C
San Salvador
El Salvador
Tel. +503 2557/2666
Fax +503 2557/2652
info@aplitecsv.com
www.aplitecsv.com

Isotex de Panamá S.A.
Plaza Conquistador Local #5
Panama City
Panamá
Tel. +507 217/0050 - 217/0106
Fax +507 217/0049
gerencia@isotexpanama.com
info@isotexpanama.com

Eicepak S.A.C.
Av. Los Cipreses N° 484 Los Ficus
Santa Anita - Lima
Perú
Tel. +51 1/3628484 - 3627127
- 3628698
Fax +51 1/3625602
eicepak@eicepak.com
www.eicepak.com

Cocles S.A.
BVAR Artigas 4543 P.O. Box 11800
Montevideo
Uruguay
Tel. +598 2/2006428 - 2090446
Fax +598 2/206428
cocles@adinet.com.uy
www.cocles.com.uy

Middle East

Compressed Air Technology Co.Saa
83 - El Sabteya Str.
21211 Sabteya ET
Kairo
Egypt
Tel. +20 2/25766266 - 25774400
Fax +20 2/25750113
neveen@elhaggarmisr.com

E. Yeruham & Comp. Ltd.
34 Hahofer Street
P.O. Box 11884 Holon
58117 Holon
Israel
Tel. +972 3/5567322
Fax +972 3/5596616
office@ayeruham.com
www.ayeruham.com

Raymond Feghali Co.
For Trade & Industry SARL
Naher El-Mott Highway, Zalka
P.O. BOX 90-723 Jdeideh
Lebanon
Tel. +961 1/893176 - 894545
Fax +961 1/879500
RTF@raymondfehalico.com
www.raymondfehalico.com

Techno-Line Trading & Services WLL
Ware House 05, Building 2189
Road 1529, Block 115
Hidd
Kingdom of Bahrain
Tel. +973 17783906
Fax +973 17786906
techline@batelco.com.bh

Al - Maram General Trading Co.
Shuwaikh Indust. Area Plot 55-60
Shop No. 9, Khalifa Al-Jassim Street
Behind Safety international Shuwaikh
Kuwait
Tel./Fax +965 24828108
almaramkuwait@gmail.com

Al-Hawaiya for Industrial Solutions
Establishment. (ALHA)
Kilo - 3, Makkah Road
P.O. Box 11429
Jeddah 21453
Saudi Arabia
Tel. +966 2/6885524
Fax +966 2/6885061
info@alha.com.sa
www.alha.com.sa

Ohaara Data Engineering
Surian Djadideh Zouhour Street
4410 Aleppo
Syria
Tel. +963 21/2273227
Fax +963 21/2273281
ohaara_ozla@yahoo.com

I.M.O.
Industrial Machine Trd. Co. L.L.C.
P.O. Box 20376
Sharjah
United Arab Emirates
Tel. +971 6/5437991
Fax +971 6/5437994
imo@eim.ae

Asia

PT. Golden Archy Sakti
Kompleks Prima Centre Blok B2 No.2
Jl.Pool PPD - Pesing Poglar No.11,
Kedaung Kali Angke - Cengkareng,
Jakarta Barat 11710
Indonesia
Tel. +62 21/54377888
Fax +62 21/54377089
sales@archy.co.id
www.archy.co.id

Seika Corporation
Aqua Dojima East Bldg.
16F, 4-4, 1-Chome, Dojimahama,
Kita-Ku Osaka
Japan
Tel. +81 6/63453176
Fax +81 6/63443584
kuronakat@jp.seika.com

Exceltec Automation Inc.
608-G, EL-AL Building,
Quezon Avenue, Tatalon
Quezon City, 1113
Philippines
Tel. +632/4161143 - 4161141
- 7319015
Fax +632/7121672
sales.manila@exltec.com

Exceltec Enviro Pte Ltd
Block 3025 Ubi Road 3
03-141
408653
Singapore
Tel. +65 67436083
Fax +65 67439286
sales@exltec.com

Tae-Seung
537, Dansan-ro,
Dong-gu, Daegu
South Korea
Tel. +82 53/356 7212
Fax +82 53/356 7213
tss369@hanmail.net
www.khic.co.kr

**Savikma Automation & Engineering
Services (Pvt) Ltd.**
22, Wattegedara Road
Maharagama
Sri Lanka
Tel. +94 115642164
Hot line +94 777800070
Fax +94 112844777
saes@sltnet.lk

**Zenith Automation
International Co., Ltd.**
12F, No.97 Sec.4, Chongxin Rd,
Sanchong Dist.
New Taipei City 24161
Taiwan
Tel. +886 2/2970 1267
Fax +886 2/3322 8973
za-sales@z-auto.com.tw
www.z-auto.com.tw

Pneumax Co. Ltd.
107/1 Chaloeam Phrakiat R.9 Rd.,
Pravet - Bangkok 10250
Thailand
Tel. +66 2/7268000
Fax +66 2/7268260
import@pneumax.co.th
www.pneumax.co.th

Africa

Boudissa Technology Sarl
25, Cité 20 Août 1955
Oued Roumane El Achour
Algiers - 16403

Algeria

Tel. +213 21 307069
Fax +213 21 3080
contact@boudissatech.com
www.boudissatech.com

DISMATEC

Distribution de Matériels Techniques
N° RCCM-CI-ABJ-2010B1882
16 BP 236 ABIDJAN 16

Ivory Coast

Tel. +225 21267091
Fax +225 21262367
dismatec2002@yahoo.fr

FHP s.a. Flexibles Haute Pression

25 Rue Lt Puissesseau
Casablanca

Morocco

Tel. +212 22/301997
Fax +212 22/301913
fhpelidrissi@iam.net.ma

Hydramatics Control Equipment

15 Village Crescent,
Linbro Business Park,
Sandton Johannesburg 2065

South Africa

Tel. +2711/6081340 - 1 - 2
Fax +2786/5516311
mjones@hydramatics.co.za
www.hydramatics.co.za

A.T.C. Automatisme

Avenue Habib Bourguiba
Centra Said - BP 25 2033
Megrine

Tunisia

Tel. +216 71/297328
Fax +216 71/429084
commercial@atc.com.tn
www.atc.automatisme.com

Oceania

Griffiths Components Pty Ltd

605 Burwood Hwy
Knoxfield Victoria
Melbourne 3180

Australia

Tel. +61 3/9800 6500
Fax +61 3/9801 8553
enquiry@camozzi.com.au



Short form catalogue

release 8.8

MIX COMUNICAZIONE - MI



Air that moves the world

A Camozzi Group Company
www.camozzi.com

93-1009-06B023 11/2016

