




Super-rapid fittings

		Page
Series 6000	Super-rapid fittings for plastic tubes Tube external diameters: 3, 4, 5, 6, 8, 10, 12, 14, 16 mm Fittings threads: metric (M3, M5, M6, M7), BSP (G1/8, G1/4, G3/8, G1/2, G3/4), BSPT (R1/8, R1/4, R3/8, R1/2)	163
Series 7000	Super-rapid Compact fittings in technopolymer Tube external diameters: 4, 6, 8, 10, 12, 16 mm Fittings threads: metric (M5, M7), BSP (G1/8, G1/4, G3/8, G1/2, G3/4)	167
Series 8000	Dual seal super-rapid fittings Tube external diameters: 4, 6, 8, 10 mm Fittings threads: BSP (G1/8, G1/4, G3/8)	169
Series X6000	Super-rapid fittings in stainless steel 316L Tube external diameters: 4, 6, 8, 10, 12 mm Fittings threads: BSP (G1/8, G1/4, G3/8, G1/2), BSPT (R1/8, R1/4, R3/8, R1/2)	170



Rapid fittings

		Page
Series 1000	Rapid push-in fittings for plastic tubes	171
	Tube external diameters: 5/3, 6/4, 8/6, 10/8, 12/10, 15/12,5 mm Fittings threads: metric (M5, M6, M12x1, M12x1,25), BSP (G1/8, G1/4, G3/8, G1/2), BSPT (R1/8, R1/4, R3/8, R1/2)	



Universal fittings

		Page
Series 1000	Universal nose fittings	174
	Nose fittings for plastic, copper and brass tubes ϕ 4, 6, 8, 10, 12 mm Fittings threads: BSP (G1/8, G1/4), BSPT (R1/8, R1/4, R3/8, R1/2)	

Fittings accessories

		Page
Series S2000	Pipe fittings Sprint®	175
	Fittings threads: BSP (G1/8, G1/4, G3/8, G1/2), BSPT (R1/8, R1/4, R3/8, R1/2)	
Series 2000	Pipe fittings	176
	Fittings threads: metric (M5), BSP (G1/8, G1/4, G3/8, G1/2, G3/4, G1), BSPT (R1/8, R1/4, R3/8, R1/2, R3/4, R1)	
Series T, MPL, PNZ	Tubing, spirals and accessories	178
	Tubes: reinforced PVC, Polyamide PA12, Hytrel Polyester, Polyethylene, PU Diameters : 4/2, 5/3, 6/4, 8/6, 10/8, 12/10, 15/12,5 mm	

Quick-release couplings

		Page
Series 5000	Quick-release couplings	179
	Nominal diameters: 5 and 7 mm Couplings threads: G1/8, G1/4, G3/8, G1/2 Plastic tubes: 6/4, 8/6, 10/8 Rubber hoses: 6x14, 8x17, 10x19, 13x23	
Series 5000L, 5000LT	Quick-release couplings for the conditioning of moulds for plastics	180
	Nominal diameters: 5, 7 mm Couplings threads: G1/8, G1/4, G3/8	


Series 6000 super-rapid fittings for plastic tubes

New models

Tube external diameters: 3, 4, 5, 6, 8, 10, 12, 14, 16 mm

Fittings threads: metric (M3, M5, M6, M7), BSP (G1/8, G1/4, G3/8, G1/2, G3/4), BSPT (R1/8, R1/4, R3/8, R1/2)

Series 6000 super-rapid fittings have been designed with a special collet which provides an homogeneous tight on the whole surface of plastic tubes, thus ensuring high reliability and a long service life, also after connections and disconnections of the tube are repeated several times. The wide range of these fittings includes many types of threads: metric, BSP and BSPT. Sprint models are characterized by great reliability of female threads, both BSP and BSPT, with non-flat surfaces. This is possible thanks to a Teflon ring on the male thread, which guarantees a perfect seal between the two threads. The "Stop Fitting" model is available with a self-retaining device which interrupts the air flow when the tube is disconnected and restores it when reconnected.



Mod.
S6510 4-1/8 **S6510 10-1/4**
S6510 4-1/4 **S6510 10-3/8**
S6510 5-1/8 **S6510 10-1/2**
S6510 5-1/4 **S6510 12-1/4**
S6510 6-1/8 **S6510 12-3/8**
S6510 6-1/4 **S6510 12-1/2**
S6510 6-3/8 **S6510 14-3/8**
S6510 8-1/8 **S6510 14-1/2**
S6510 8-1/4 **S6510 16-1/2**
S6510 8-3/8 **S6510 16-3/4**
S6510 8-1/2

 Male Connector *Sprint*®


Mod.
S6510 4-1/8-LF
S6510 6-1/8-LF

 Male Connector *Sprint*®
 with self-retaining device


Mod. Micro
6512 3-M3°
6512 3-M5*
6512 4-M7-M*
6512 4-1/8-M*^
6512 6-M7-M*
6512 6-1/8-M*^
6512 8-1/8-M*^
6512 10-1/4-M*

° = with gasket
 * = with O-Ring
 ^ = this model can be used on Series Y valve islands

Metric-BSP Male Connector



Mod.
6512 4-M5 **6512 10-1/4**
6512 4-M6 **6512 10-3/8**
6512 4-1/8 **6512 12-1/4**
6512 4-1/4 **6512 12-3/8**
6512 5-M5
6512 6-M5
6512 6-1/8
6512 6-1/4
6512 8-1/8
6512 8-1/4
6512 8-3/8

Metric-BSP Male Connector



Mod.
6463 4-M5
6463 4-1/8
6463 5-1/8
6463 6-1/8
6463 6-1/4
6463 8-1/8
6463 8-1/4
6463 10-1/4

Metric-BSP Female Connector



Mod.
S6520 4-1/8 **S6520 8-1/2**
S6520 4-1/4 **S6520 10-1/4**
S6520 5-1/8 **S6520 10-3/8**
S6520 5-1/4 **S6520 10-1/2**
S6520 6-1/8 **S6520 12-1/4**
S6520 6-1/4 **S6520 12-3/8**
S6520 6-3/8 **S6520 12-1/2**
S6520 8-1/8 **S6520 14-3/8**
S6520 8-1/4 **S6520 14-1/2**
S6520 8-3/8

 Swivel Male Elbow *Sprint*®


Mod. Micro
6522 3-M3°
6522 3-M5*
 ° = with gasket
 * = with O-Ring

Metric Swivel Male Elbow



Mod.
6522 4-M5
6522 4-1/8
6522 4-1/4
6522 5-M5
6522 6-M5
6522 6-1/8
6522 6-1/4
6522 8-1/8
6522 8-1/4
6522 8-3/8
6522 10-1/4
6522 10-3/8
6522 12-1/4
6522 12-3/8

Metric-BSP Swivel Male Elbow



Mod.
S6500 4-1/8
S6500 4-1/4
S6500 5-1/8
S6500 5-1/4
S6500 6-1/8
S6500 6-1/4
S6500 8-1/8
S6500 8-1/4
S6500 8-3/8
S6500 10-1/4
S6500 10-3/8
S6500 12-1/4
S6500 12-3/8

Metric Fix Male Elbow



Mod.
6525 6-1/8
6525 6-1/4
6525 8-1/8
6525 8-1/4

 Long Swivel Male Elbow *Sprint*®

 Complete Metric Adjustable
 Single Banjo


Mod.
6501 4-M5

Metric Fix Male Elbow



Mod.
S6430 4-1/8
S6430 5-1/8
S6430 5-1/4
S6430 6-1/8
S6430 6-1/4
S6430 8-1/8
S6430 8-1/4
S6430 8-3/8
S6430 10-1/4
S6430 10-3/8
S6430 10-1/2
S6430 12-1/4
S6430 12-3/8
S6430 12-1/2
S6430 14-1/2

Swivel Male Tee *Sprint*[®]



Mod. Micro
6432 3-M3°
6432 3-M5*

° = with gasket
 * = with O-Ring

Metric Swivel Male Tee



Mod.
6432 4-M5
6432 4-1/8
6432 5-M5
6432 6-1/8
6432 6-1/4
6432 8-1/8
6432 8-1/4
6432 8-3/8
6432 10-1/4
6432 10-3/8
6432 12-1/4
6432 12-3/8

Metric-BSP Swivel Male Tee



Mod.
S6440 4-1/8
S6440 5-1/8
S6440 6-1/8
S6440 6-1/4
S6440 8-1/8
S6440 8-1/4
S6440 8-3/8
S6440 10-1/4
S6440 10-3/8
S6440 12-3/8
S6440 14-1/2

Lateral Swivel Male Tee *Sprint*[®]



Mod. Micro
6442 3-M3°
6442 3-M5*

° = with gasket
 * = with O-Ring

Lateral Metric Swivel Male Tee



Mod.
6442 4-M5
6442 4-1/8
6442 5-M5
6442 6-1/8
6442 6-1/4
6442 8-1/8
6442 8-1/4
6442 8-3/8
6442 10-1/4
6442 10-3/8
6442 12-1/4
6442 12-3/8

Lateral Metric-BSP Swivel Male Tee



Mod. Micro
6452 3-M3°
6452 3-M5*

° = with gasket
 * = with O-Ring

Metric Swivel Male Y



Mod.
6451 4-M5*
6451 6-M5*
S6450 4-1/8°
S6450 6-1/8°
S6450 8-1/8°
S6450 8-1/4°

* = Metric Adjustable Male Y
 (not swivel Model with gasket)
 ° = Swivel Male Y *Sprint*[®]



Mod.
6622 4-M5*
6622 4-1/8
6622 6-1/8
6622 6-1/4
6622 8-1/8
6622 8-1/4
6622 10-1/4

* = Complete Metric Swivel Single Banjo

Complete BSP Swivel Single Banjo



Mod.
6632 4-1/8
6632 6-1/8
6632 6-1/4
6632 8-1/8
6632 8-1/4
6632 10-1/4

Complete BSP Swivel Double Banjo




Mod.
6620 4-M5°
6620 4-1/8*
6620 6-1/8*
6620 6-1/4*
6620 8-1/8*
6620 8-1/4*

Double Banjo
 Assembled with:
 ° = Mod. SCU, SVU, SCO...
 * = Mod. 1631, 1635, SCU, SVU, SCO...



Mod.
1631 01-
1631 02-
1631 03-

01... = Single Banjo Stem
 02... = Double Banjo Stem
 03... = Triple Banjo Stem



Mod.
6610 4-M5* **6610 6-1/8***
6610 4-M6° **6610 6-1/4***
6610 4-1/8* **6610 8-1/8***
6610 5-M5* **6610 8-1/4***
6610 5-M6° **6610 8-3/8***
6610 5-1/8* **6610 10- 1/4****
6610 6-M5* **6610 10- 3/8****
6610 6-M6° **6610 12-1/2^**

Single Banjo
 Assembled with:
 * = Mod. 1631
 ° = Mod. SCU, SVU, SCO...
 * = Mod. 1631, 1635, SCU, SVU, SCO...
 ** = Mod. 1635, SCU, SVU, SCO...
 ^ = Mod. 1635



Mod.
6811 4-M5*
6811 4-1/8
6811 5-1/8
6811 5-1/4
6811 6-1/8
6811 6-1/4
6811 8-1/8
6811 8-1/4
6811 10-1/4
6811 10-3/8
6811 12-3/8
6811 14-1/2

* = with O-Ring

Metric Male Adaptor *Sprint*[®]



Mod.
S6110 6-1/8
S6110 6-1/4
S6110 8-1/8
S6110 8-1/4
S6110 8-3/8
S6110 10-1/4
S6110 10-3/8
S6110 10-1/2
S6110 12-1/4
S6110 12-3/8
S6110 12-1/2

45° Male Elbow *Sprint*[®]

Mod. Micro
6590 3



Bulkhead Connector

Mod.
6590 4
6590 5
6590 6
6590 8
6590 10
6590 12
6590 14



Bulkhead Connector

Mod. Micro
6580 3



Union Connector

Mod.
6580 4
6580 5
6580 6
6580 8
6580 10
6580 12
6580 14



Union Connector

Mod.
6580 6-4
6580 8-6
6580 10-8
6580 12-10



Reducer Union Connector

Mod.
6593 6-1/8
6593 6-1/4
6593 8-1/8
6593 8-1/4
6593 10-3/8



BSP Female Bulkhead

Mod. Micro
6550 3



Elbow connector

Mod.
6550 4
6550 5
6550 6
6550 8
6550 10
6550 12
6550 14



Elbow connector

Mod. Micro
6540 3



Tee Connector

Mod.
6540 4
6540 5
6540 6
6540 8
6540 10
6540 12
6540 14



Tee Connector

Mod.
6600 4
6600 5
6600 6
6600 8
6600 10
6600 12



Cross Junction

Mod. Micro
6560 3



Y Union

Mod.
6560 4
6560 6
6560 8
6560 10



Y Union

Mod.
6700 3
6700 4
6700 5
6700 6
6700 8
6700 10



Cartridge for both metallic and synthetic seat

Mod.
6750 4
6750 6
6750 8
6750 10
6750 12



Female Plug

Mod.
6850 6-4
6850 8-6



Enlarger Junction

Mod. Micro
6800 3-4



Reducer Junction

Mod.
6800 4-5
6800 4-6
6800 4-8
6800 5-6
6800 5-8
6800 6-8
6800 6-10
6800 6-12
6800 8-10
6800 8-12
6800 10-12
6800 10-14
6800 12-14



Reducer Junction

Mod.
6950 4
6950 6
6950 8
6950 10
6950 12
6950 14



Junction

Mod.
6555 4-4
6555 6-6
6555 8-8
6555 10-10



Junction Elbow

Mod.
6708 4
6708 5
6708 6
6708 8
6708 10
6708 12
6708 14



Protection caps
Colour: Black
Self-extinguishing material, class V0

Mod. Micro
6900 3



Plastic Male Plug

Mod.
6900 4
6900 5
6900 6
6900 8
6900 10
6900 12
6900 14



Plastic Male Plug

Mod.
SP



The set includes keys to disconnect tubes with diameters between 4 and 12 mm


Series 7000 super-rapid Compact fittings in technopolymer













New models

Tube external diameters: 4, 6, 8, 10, 12, 16 mm

Fittings threads: metric (M5, M7), BSP (G1/8, G1/4, G3/8, G1/2, G3/4)

Series 7000 super-rapid fittings are realized in technopolymer. Compact and lightweight, they are suitable for applications where weight can be a key factor. The special collet, which has been designed properly for this series, provides an homogeneous tight on the whole surface of plastic tubes, thus ensuring high reliability and long service life, also after connections and disconnections of the tube are repeated several times. Series 7000 fittings are the answer to the many requests coming from the Pneumatic and Automation market. The new "Stop Fitting" model is available with a self-retaining device which interrupts the air flow when the tube is disconnected and restores it when reconnected.



 <p>Mod. 7522 4-M5 7522 10-1/4 7522 4-M7 7522 10-3/8 7522 4-1/8 7522 10-1/2 7522 4-1/4 7522 12-1/4 7522 6-M5 7522 12-3/8 7522 6-M7 7522 12-1/2 7522 6-1/8 7522 16-1/2 7522 6-1/4 7522 16-3/4 7522 8-1/8 7522 8-1/4 7522 8-3/8</p> <p>Metric-BSP Male Swivel Elbow</p>	 <p>Mod. 7522 4-1/8-LF 7522 6-1/8-LF</p> <p>Metric-BSP Male Swivel Elbow with self-retaining device</p>	 <p>Mod. 7526 4-1/8 7526 6-1/8 7526 6-1/4 7526 8-1/8 7526 8-1/4</p> <p>Long BSP Male Swivel Elbow</p>
 <p>Mod. 7442 4-1/8 7442 6-1/8 7442 6-1/4 7442 8-1/8 7442 8-1/4 7442 8-3/8 7442 10-1/4 7442 10-3/8 7442 12-3/8 7442 12-1/2 7442 16-1/2* 7442 16-3/4*</p> <p>Lateral BSP Swivel Male Tee</p> <p>* = model without mounting holes</p>	 <p>Mod. 7432 4-M5 7432 4-1/8 7432 6-M5 7432 6-1/8 7432 6-1/4 7432 8-1/8 7432 8-1/4 7432 8-3/8 7432 10-1/4 7432 10-3/8 7432 12-1/4 7432 12-3/8 7432 12-1/2 7432 16-1/2 7432 16-3/4</p> <p>BSP Swivel Male Tee</p>	 <p>Mod. 7542 6-4-1/8 7542 6-4-1/4 7542 8-6-1/8 7542 8-6-1/4 7542 10-8-1/4 7542 10-8-3/8</p> <p>BSP Swivel Male Multi Tee Reducer</p>
 <p>Mod. 7562 4-1/8 7562 6-1/8 7562 6-1/4 7562 8-1/8 7562 8-1/4 7562 10-1/4 7562 10-3/8</p> <p>BSP Swivel Male Y</p>	 <p>Mod. 7572 4-1/8 7572 4-1/4 7572 6-1/8 7572 6-1/4</p> <p>BSP Male Double Y</p>	 <p>Mod. 7622 4-1/8 7622 6-1/8 7622 6-1/4 7622 8-1/8 7622 8-1/4 7622 10-1/4 7622 10-3/8 7622 12-3/8</p> <p>Complete BSP Swivel Single Banjo</p>
 <p>Mod. 7652 4-1/8 7652 6-1/8 7652 6-1/4 7652 8-1/8 7652 8-1/4 7652 10-1/4 7652 10-3/8</p> <p>Complete BSP Swivel Double Banjo</p>	 <p>Mod. 7610 4-1/8 7610 6-1/8 7610 6-1/4 7610 8-1/8 7610 8-1/4 7610 10-1/4 7610 10-3/8 7610 12-3/8</p> <p>Single Banjo Assembled with Mod. 7632 02, 7632 03</p>	 <p>Mod. 7640 4-1/8 7640 6-1/8 7640 6-1/4 7640 8-1/8 7640 8-1/4 7640 10-1/4</p> <p>Double Banjo Assembled with Mod. 7632 02, 7632 03</p>



Mod.
7632 02-1/8
7632 02-1/4
7632 02-3/8

Double Banjo Stem
Assembled with Mod. 7610, 7640



Mod.
7632 03-1/8
7632 03-1/4

Triple Banjo Stem
Assembled with Mod. 7610, 7640



Mod.
7612 02 4-1/8
7612 02 6-1/8
7612 02 6-1/4
7612 02 8-1/8
7612 02 8-1/4
7612 02 10-1/4
7612 02 10-3/8
7612 02 12-3/8

Complete BSP Double Adjustable
Single Banjo



Mod.
7612 03 4-1/8
7612 03 6-1/8
7612 03 6-1/4
7612 03 8-1/8
7612 03 8-1/4
7612 03 10-1/4

Complete BSP Triple Adjustable
Single Banjo



Mod.
7642 02 4-1/8
7642 02 6-1/8
7642 02 6-1/4
7642 02 8-1/8
7642 02 8-1/4
7642 02 10-1/4

Complete BSP Double Adjustable
Double Banjo



Mod.
7642 03 4-1/8
7642 03 6-1/8
7642 03 6-1/4
7642 03 8-1/8
7642 03 8-1/4
7642 03 10-1/4

Complete BSP Triple Adjustable
Double Banjo



Mod.
7800 4-6
7800 4-8
7800 6-8
7800 6-10
7800 6-12
7800 8-10
7800 8-12
7800 10-12
7800 10-14

Reducer Junction



Mod.
7555 4-4
7555 6-6
7555 8-8
7555 10-10
7555 12-12

Junction Elbow



Mod.
7580 4
7580 6
7580 8
7580 10
7580 12

Union Connector



Mod.
7550 4
7550 6
7550 8
7550 10
7550 12
7550 16*

* = model without
mounting holes

Elbow Connector



Mod.
7540 4
7540 6
7540 8
7540 10
7540 12
7540 16*

* = model without
mounting holes

Tee Connector



Mod.
7545 6-4
7545 8-6
7545 10-8

Multi Tee Reducer



Mod.
7560 4
7560 6
7560 8
7560 10
7560 6-4
7560 8-6
7560 10-8

Y Connector - Reducer



Mod.
7575 6-4
7575 8-6

Reduced Double Y



Mod.
7950 4
7950 6
7950 8
7950 10
7950 12


Plastic Junction

Series 8000 dual seal super-rapid fittings

Tube external diameters: 4, 6, 8, 10, 12 mm

Fittings threads: BSP (G1/8, G1/4, G3/8, G1/2)

With its vast experience in manufacturing push-in connections for the pneumatics industry and its indepth research into fluid power systems, Camozzi has developed Series 8000 super-rapid fitting evolving from Series 6000, which has been which has been extensively tested in the pneumatic sector. A patented additional seal provides a double tight on the tube, thus ensuring a highly reliable connection and avoiding any possible leakage that may occur. Connection and disconnection of the tube can be repeated several times without the use of proper tools and without compromising the performance of the fitting of the sealing on the tube. The NBR seals are standard and can be easily replaced with FKM and EDM seals.



Mod.
8512 4-1/8
8512 6-1/8
8512 6-1/4
8512 8-1/8
8512 8-1/4
8512 10-1/4
8512 10-3/8
8512 12-3/8
8512 12-1/2

BSP Male Connector



Mod. Micro
8522 4-1/8
8522 6-1/8
8522 6-1/4
8522 8-1/8
8522 8-1/4
8522 10-1/4
8522 10-3/8
8522 12-3/8
8522 12-1/2

BSP Swivel Male Elbow



Mod.
8432 4-1/8
8432 6-1/8
8432 8-1/8
8432 8-1/4

BSP Swivel Male Tee



Mod.
8580 4
8580 6
8580 8

Union Connector



Mod.
8540 4
8540 6
8540 8

Tee Connector



Mod.
8550 4
8550 6
8550 8

Elbow Connector


Series X6000 super-rapid fittings in stainless steel 316L

Tube external diameters: 4, 6, 8, 10, 12 mm

Fittings threads: BSP (G1/8, G1/4, G3/8, G1/2), BSPT (R1/8, R1/4, R3/8, R1/2)

Series X6000 fittings have been designed to offer versatility and ease of installation without any compromise in quality or performance. They are suitable for applications in the pneumatics, fluids, chemical, medical, food and packaging industries.

Series X6000 fittings are practical and safe and allow the connection of fluids even in aggressive environments. The collet ensures excellent grip between the fitting and tubing.




 <p>Mod. X6510 4-1/8 X6510 4-1/4 X6510 6-1/8 X6510 6-1/4 X6510 8-1/8 X6510 8-1/4 X6510 10-1/4 X6510 10-3/8 X6510 10-1/2 X6510 12-1/4 X6510 12-3/8 X6510 12-1/2</p> <p>BSPT Male Connector</p>	 <p>Mod. X6512 4-1/8 X6512 4-1/4 X6512 6-1/8 X6512 6-1/4 X6512 8-1/8 X6512 8-1/4 X6512 10-1/4 X6512 10-3/8 X6512 10-1/2 X6512 12-1/4 X6512 12-3/8 X6512 12-1/2</p> <p>BSP Male Connector</p>	 <p>Mod. X6500 4-1/8 X6500 6-1/8 X6500 6-1/4 X6500 8-1/8 X6500 8-1/4 X6500 10-1/4 X6500 10-3/8 X6500 12-1/4 X6500 12-3/8</p> <p>BSPT Fix Elbow</p>
 <p>Mod. X6520 4-1/8 X6520 4-1/4 X6520 6-1/8 X6520 6-1/4 X6520 8-1/8 X6520 8-1/4 X6520 10-1/4 X6520 10-3/8 X6520 12-1/4 X6520 12-3/8 X6520 12-1/2</p> <p>BSPT Swivel Elbow</p>	 <p>Mod. X6430 4-1/8 X6430 4-1/4 X6430 6-1/8 X6430 6-1/4 X6430 8-1/8 X6430 8-1/4 X6430 10-1/4 X6430 10-3/8 X6430 12-1/4 X6430 12-3/8 X6430 12-1/2</p> <p>BSPT Swivel Centre Tee</p>	 <p>Mod. X6522 4-1/8 X6522 4-1/4 X6522 6-1/8 X6522 6-1/4 X6522 8-1/8 X6522 8-1/4 X6522 10-1/4 X6522 10-3/8 X6522 12-1/4 X6522 12-3/8 X6522 12-1/2</p> <p>BSP Swivel Elbow</p>
 <p>Mod. X6432 4-1/8 X6432 4-1/4 X6432 6-1/8 X6432 6-1/4 X6432 8-1/8 X6432 8-1/4 X6432 10-1/4 X6432 10-3/8 X6432 12-1/4 X6432 12-3/8 X6432 12-1/2</p> <p>BSP Swivel Centre Tee</p>	 <p>Mod. X6580 4 X6580 6 X6580 8 X6580 10 X6580 12</p> <p>Union Connector</p>	 <p>Mod. X6550 4 X6550 6 X6550 8 X6550 10 X6550 12</p> <p>Elbow Connector</p>
 <p>Mod. X6540 4 X6540 6 X6540 8 X6540 10 X6540 12</p> <p>Tee Connector</p>	 <p>Mod. X6590 4 X6590 6 X6590 8 X6590 10 X6590 12</p> <p>Bulkhead Union Connector</p>	 <p>Mod. X6800 4-6 X6800 4-8 X6800 6-8 X6800 6-10 X6800 6-12 X6800 8-10 X6800 8-12 X6800 10-12</p> <p>Reducer Tube/Stem</p>

Series 1000 rapid push-in fittings for plastic tubes

Tube external diameters: 5/3, 6/4, 8/6, 10/8, 12/10, 15/12,5 mm

Fittings threads: metric (M5, M6, M12x1, M12x1,25),
BSP (G1/8, G1/4, G3/8, G1/2), BSPT (R1/8, R1/4, R3/8, R1/2)

Series 1000 rapid push-in fittings can be easily installed.
The push-in locking nuts can be tightened both manually and with a spanner even
in case of stiff tubes like the PA or the Hytrel Polyester.
The special shape of the guiding cone ensures that the tube cannot be accidentally cut.



Mod.
1510 5/3-1/8
1510 6/4-1/8
1510 6/4-1/4
1510 6/4-3/8
1510 6/4-1/2
1510 6/4-M12x1,25
1510 8/6-1/8
1510 8/6-1/4
1510 8/6-3/8
1510 8/6-1/2
1510 10/8-1/8
1510 10/8-1/4
1510 10/8-3/8
1510 10/8-1/2
1510 12/10-3/8
1510 12/10-1/2
1510 15/12,5-1/2

Metric-BSPT Male Connector



Mod.
1511 5/3-M5*
1511 5/3-M6*
1511 5/3-1/8
1511 6/4-M5*
1511 6/4-M6*
1511 6/4-1/8
1511 6/4-1/4
1511 6/4-3/8
1511 8/6-1/8
1511 8/6-1/4
1511 8/6-3/8
1511 10/8-1/8
1511 10/8-1/4
1511 10/8-3/8
1511 10/8-1/2
1511 12/10-3/8
1511 12/10-1/2
1511 15/12,5-1/2

* = with O-Ring

Metric Male Connector *Sprint*[®]



Mod.
1560 6/4-1/8
1560 6/4-1/4
1560 8/6-1/8
1560 8/6-1/4
1560 10/8-1/4
1560 10/8-3/8
1560 12/10-3/8

Swivel Male Connector *Sprint*[®]



Mod.
1463 5/3-1/8
1463 6/4-1/8
1463 6/4-1/4
1463 6/4-3/8
1463 8/6-1/8
1463 8/6-1/4
1463 8/6-3/8
1463 10/8-1/8
1463 10/8-1/4
1463 10/8-3/8
1463 10/8-1/2
1463 12/10-3/8

BSP Female Connector



Mod.
1541 6/4-1/8
1541 6/4-1/4
1541 8/6-1/8
1541 8/6-1/4
1541 10/8-1/4

Swivel Male Elbow *Sprint*[®]



Mod.
1500 5/3-1/8
1500 6/4-1/8
1500 6/4-1/4
1500 6/4-3/8
1500 6/4-M12x1,25
1500 8/6-1/8
1500 8/6-1/4
1500 8/6-3/8
1500 8/6-1/2
1500 10/8-1/8
1500 10/8-1/4
1500 10/8-3/8
1500 10/8-1/2
1500 12/10-3/8
1500 12/10-1/2
1500 15/12,5-1/2

Fix Metric-BSPT Male Elbow



Mod.
1501 5/3-M5

Metric Fix Male Elbow



Mod.
1493 6/4-1/8
1493 6/4-1/4
1493 8/6-1/8
1493 8/6-1/4
1493 10/8-1/4
1493 12/10-3/8

BSP Female Elbow



Mod.
1431 6/4-1/8
1431 6/4-1/4
1431 8/6-1/8
1431 8/6-1/4
1431 10/8-1/4

Swivel Male Tee *Sprint*[®]



Mod.
 1410 5/3-1/8
 1410 6/4-1/8
 1410 6/4-1/4
 1410 8/6-1/8
 1410 8/6-1/4
 1410 10/8-1/8
 1410 10/8-1/4
 1410 10/8-1/2
 1410 12/10-3/8
 1410 12/10-1/2
 1410 15/12,5-1/2

BSPT Fix Male Tee



Mod.
 1420 5/3-1/8
 1420 6/4-1/8
 1420 6/4-1/4
 1420 8/6-1/8
 1420 8/6-1/4
 1420 10/8-1/8
 1420 10/8-1/4

Lateral BSPT Male Tee



Mod.
 1521 5/3-M5
 1521 5/3-1/8
 1521 6/4-M5
 1521 6/4-1/8
 1521 6/4-1/4
 1521 6/4-3/8
 1521 8/6-1/8
 1521 8/6-1/4
 1521 8/6-3/8

Complete Metric-BSP
 Single Adjustable Banjo



Mod.
 1525 6/4-1/8
 1525 6/4-1/4
 1525 6/4-3/8
 1525 8/6-1/8
 1525 8/6-1/4
 1525 8/6-3/8
 1525 10/8-1/8
 1525 10/8-1/4
 1525 10/8-3/8
 1525 10/8-1/2
 1525 12/10-3/8
 1525 12/10-1/2
 1525 15/12,5-1/2

Complete Single
 Adjustable Long Banjo



Single Banjo
 Assembled with:
 ° = Mod. 1631, 1635
 ° = Mod. SCU, SVU, SCO...
 * = Mod. 1631, 1635,
 SCU, SVU, SCO...
 ** = Mod. 1635, SCU, SVU,
 SCO...
 ^ = Mod. 1635



Mod.
 1620 6/4-M5°
 1620 6/4-1/8°
 1620 6/4-1/4°
 1620 8/6-1/8°
 1620 8/6-1/4°

Double Banjo
 Assembled with:
 ° = Mod. 1631, 1635
 * = Mod. 1631, 1635, SCU, SVU, SCO...



Mod.
 1631 01-M5*
 1631 01-1/8
 1631 01-1/4
 1631 01-3/8
 1631 01-1/2

* = zinc-plated
 steel

Single Banjo Stem
 Assembled with adjustable fittings
 Mod. 6610, 6620, 1610, 1620, 2023, 1170



Mod.
 1635 01-1/8
 1635 01-1/4
 1635 01-3/8
 1635 01-1/2
 1635 01-M12x1,25*
 1635 01-M12x1,5*

Single Long Banjo Stem
 Assembled with adjustable fittings
 Mod. 6610, 6620, 1610, 1620, 2023, 1170
 * = Models that can be assembled with
 1/4 banjo fittings



Mod.
 1631 02-1/8
 1631 02-1/4
 1631 02-3/8

Double Banjo Stem
 Assembled with adjustable fittings
 Mod. 6610, 6620, 1610, 1620, 2023, 1170



Mod.
 1635 02-1/8
 1635 02-1/4
 1635 02-3/8
 1635 02-1/2

Double Long Banjo Stem
 Assembled with adjustable fittings
 Mod. 6610, 6620, 1610, 1620, 2023, 1170



Mod.
 1631 03-1/8
 1631 03-1/4
 1631 03-3/8

Triple Banjo Stem
 Assembled with adjustable fittings
 Mod. 6610, 6620, 1610, 1620, 2023, 1170



Mod.
 1580 5/3
 1580 6/4
 1580 8/6
 1580 10/8
 1580 12/10
 1580 15/12,5
 1580 8/6-6/4
 1580 10/8-6/4

Union Connector



Mod.
1590 5/3
1590 6/4
1590 8/6
1590 10/8
1590 12/10
1590 6/4-5/3
1590 8/6-6/4

Bulkhead Union Reducer



Mod.
1550 6/4
1550 8/6
1550 10/8
1550 12/10
1550 15/12,5

Elbow Connector



Mod.
1540 5/3
1540 6/4
1540 8/6
1540 10/8
1540 12/10
1540 15/12,5
1540 8/6-6/4
1540 10/8-6/4
1540 10/8-8/6

Tee Connector



Mod.
1600 6/4
1600 8/6

Cross Connector



Mod.
1470 6/4
1470 8/6

Adaptor with Junction



Mod.
2651 1/8
2651 1/4
2651 3/8
2651 1/2
2651 1

Aluminium Washer



Mod.
2661 M3
2661 M5
2661 M6
2661 1/8
2661 1/4
2661 3/8
2661 1/2

Plastic Washer



Mod.
2665 1/8
2665 1/4
2665 3/8
2665 1/2

Plastic Washer



Mod.
2669 1/8
2669 1/4
2669 3/8
2669 1/2

Plastic Washer



Mod.
1703 5/3-M7x0,75
1703 6/4-M8x0,75
1703 6/4-M10x1
1703 8/6-M12x1
1703 10/8-M14x1
1703 12/10-M16x1
1703 15/12,5-M20x1

Blocking nut




Mod.
1723 6/4-M10x1
1723 8/6-M12x1
1723 10/8-M14x1
1723 12/10-M16x1
1723 15/12,5-M20x1

Blocking nut with metal spring

Series 1000 universal nose fittings

Nose fittings for plastic, copper and brass tubes: \varnothing 4, 6, 8, 10, 12 mm
 Fittings threads: BSP (G1/8, G1/4), BSPT (R1/8, R1/4, R3/8, R1/2)

Series 1000 nose fittings are used with plastic tubes as well as with copper, brass, steel and aluminium tubes.
 These fittings, which are suitable for several applications, can be used within pneumatic, oil-pressure and low-pressure hydraulic circuits.
 The fittings seats, noses and nuts comply with the DIN 3870-3861 standards.

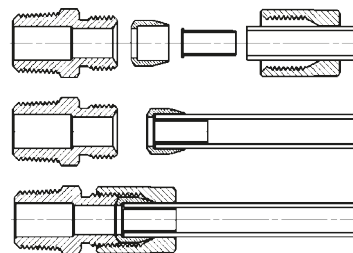


 <p>Mod. 1050 4-1/8 1050 6-1/8 1050 6-1/4 1050 8-1/8 1050 8-1/4 1050 8-3/8 1050 10-1/4 1050 10-3/8 1050 10-1/2 1050 12-1/4* 1050 12-3/8* 1050 12-1/2*</p> <p>* = with bi-conical olive</p> <p>BSPT Male Connector</p>	 <p>Mod. 1063 4-1/8 1063 6-1/8 1063 6-1/4 1063 8-1/8 1063 8-1/4</p> <p>BSP Female Connector</p>	 <p>Mod. 1020 4-1/8 1020 6-1/8 1020 6-1/4 1020 8-1/8 1020 8-1/4 1020 8-3/8 1020 10-1/4 1020 10-3/8 1020 10-1/2 1020 12-1/4* 1020 12-3/8* 1020 12-1/2*</p> <p>* = with bi-conical olive</p> <p>BSPT Fix Male Elbow</p>
 <p>Mod. 1093 4-1/8 1093 6-1/8 1093 6-1/4 1093 8-1/8 1093 8-1/4</p> <p>BSP Female Elbow</p>	 <p>Mod. 1000 4-1/8 1000 6-1/8 1000 8-1/4 1000 10-1/4</p> <p>BSPT Fix Male Tee</p>	 <p>Mod. 1010 4-1/8 1010 6-1/8 1010 8-1/4 1010 10-1/4</p> <p>Lateral BSPT Fix Male Tee</p>
 <p>Mod. 1230 4 1230 6 1230 8 1230 10 1230 12*</p> <p>* = with bi-conical olive</p> <p>Union Connector</p>	 <p>Mod. 1250 4 1250 6 1250 8 1250 10</p> <p>Bulkhead Connector</p>	 <p>Mod. 1220 4 1220 6 1220 8 1220 10 1220 12*</p> <p>* = with bi-conical olive</p> <p>Elbow Connector</p>
 <p>Mod. 1210 4 1210 6 1210 8 1210 10 1210 12*</p> <p>* = with bi-conical olive</p> <p>Tee Connector</p>	 <p>Mod. 1170 6-1/8* 1170 6-1/4* 1170 8-1/8°</p> <p>Single Banjo Assembled with * = Mod. 1631, 1635, SCU, SCV, SCO... ° = Mod. 1635, SCU, SCV, SCO...</p>	 <p>Mod. 1303 4-1/8 1303 6-1/8 1303 8-1/4 1303 10-3/8 1303 12-M18x1,5</p> <p>Blocking nut</p>
 <p>Mod. 1310 4 1310 6 1310 8 1310 10 1310 12-M18*</p> <p>* = bi-conical olive</p> <p>Olive and Bicone</p>	 <p>Mod. 1320 4 1320 6 1320 8 1320 10</p> <p>Inserts</p>	

Series S2000 pipe fittings Sprint®

Fittings threads: BSP (G1/8, G1/4, G3/8, G1/2), BSPT (R1/8, R1/4, R3/8, R1/2)

Series S2000 pipe fittings are characterized by great reliability of female threads, both BSP and BSPT, with non-flat surfaces. The patented Sprint models are provided with a particular torque system which avoids the use of liquid glues or PTFE band, making thus the mounting quicker.

Thanks to this system the connection and disconnection of the fitting can be repeated several times without compromising the seal on the thread.



Mod.
S2500 1/8
S2500 1/4
S2500 3/8
S2500 1/2

BSPT Nipple *Sprint*®



Mod.
S2530 1/4-1/8
S2530 3/8-1/8
S2530 1/2-1/8
S2530 3/8-1/4
S2530 1/2-1/4
S2530 1/2-3/8

BSPT Reducing Nipple *Sprint*®



Mod.
S2520 1/8-1/8
S2520 1/8-1/4
S2520 1/8-3/8
S2520 1/4-1/4
S2520 1/4-3/8
S2520 1/4-1/2
S2520 3/8-3/8
S2520 3/8-1/2
S2520 1/2-1/2

BSPT Male Reducing Extension *Sprint*®



Mod.
S2510 1/8-1/4
S2510 1/8-3/8
S2510 1/4-3/8
S2510 1/4-1/2
S2510 3/8-1/2

BSPT Reducing *Sprint*®



Mod.
2541 1/8-1/8
2541 1/4-1/4
2541 3/8-3/8

BSPT Swivel Male Nipple *Sprint*®



Mod.
S2010 1/8
S2010 1/4
S2010 3/8
S2010 1/2

BSPT Male Elbow *Sprint*®



Mod.
S2020 1/8-1/8
S2020 1/4-1/4
S2020 3/8-3/8
S2020 1/2-1/2

Male Female Elbow *Sprint*®



Mod.
S2050 1/8-1/8
S2050 1/4-1/4
S2050 3/8-3/8
S2050 1/2-1/2

M.M.F. Tee *Sprint*®



Mod.
S2060 1/8-1/8
S2060 1/4-1/4
S2060 3/8-3/8
S2060 1/2-1/2

F.M.F. Tee *Sprint*®



Mod.
S2070 1/8-1/8
S2070 1/4-1/4
S2070 3/8-3/8
S2070 1/2-1/2

M.F.F. Tee *Sprint*®



Mod.
S2080 1/8
S2080 1/4
S2080 3/8
S2080 1/2

Male Tee *Sprint*®



Mod.
S2090 1/8-1/8
S2090 1/4-1/4
S2090 3/8-3/8
S2090 1/2-1/2

M.F.M. Tee *Sprint*®



Mod.
2612 M5
2612 M7*
S2610 1/8
S2610 1/4
S2610 3/8
S2610 1/2

BSP Male Plug *Sprint*®
* = Metric Male Plug with O-Ring




Mod.
S2615 1/8
S2615 1/4
S2615 3/8
















BSPT Male Plug Tapper *Sprint*®

Series 2000 pipe fittings

Fittings threads: metric (M5), BSP (G1/8, G1/4, G3/8, G1/2, G3/4, G1), BSPT (R1/8, R1/4, R3/8, R1/2, R3/4, R1)

The wide range of Camozzi pipe fittings, which includes straight, L and Tee, Cross piece male or female couplings, guarantees the necessary support during the design of compressed air systems.



 <p>Mod. 2500 1/8 2500 1/4 2500 3/8 2500 1/2 2500 3/4 2500 1</p> <p>BSPT Nipple</p>	 <p>Mod. 2501 M5 2501 1/8 2501 1/4 2501 3/8 2501 1/2</p> <p>Metric-BSP Nipple</p>	 <p>Mod. 2510 1/8-1/4 2510 1/8-3/8 2510 1/4-3/8 2510 1/4-1/2 2510 3/8-1/2 2510 1/2-3/4</p> <p>BSPT Reducing Nipple</p>
 <p>Mod. 2520 1/8-1/8 2520 1/8-1/4 2520 1/8-3/8 2520 1/4-1/4 2520 1/4-3/8 2520 1/4-1/2 2520 3/8-3/8 2520 3/8-1/2 2520 1/2-1/2</p> <p>BSPT Male Reducing Extension</p>	 <p>Mod. 2521 M5-1/8 2521 1/8-1/8 2521 1/8-1/4 2521 1/8-3/8 2521 1/4-1/4 2521 1/4-3/8 2521 1/4-1/2 2521 3/8-3/8 2521 3/8-1/2 2521 1/2-1/2</p> <p>Metric-BSP Reducing Extension</p>	 <p>Mod. 2511 M5-1/8 2511 1/8-1/4 2511 1/8-3/8 2511 1/4-3/8 2511 1/4-1/2 2511 3/8-1/2</p> <p>Metric-BSP Reducing Nipple</p>
 <p>Mod. 2525 1/8-16 2525 1/8-36 2525 1/4-27 2525 1/4-43</p> <p>BSP Male Extension</p>	 <p>Mod. 2530 1/4-1/8 2530 3/8-1/8 2530 1/2-1/8 2530 3/8-1/4 2530 1/2-1/4 2530 1/2-3/8 2530 3/4-3/8 2530 3/4-1/2 2530 1-1/2</p> <p>BSPT Reducing</p>	 <p>Mod. 2531 1/8-M5* 2531 1/4-1/8* 2531 3/8-1/8 2531 3/8-1/4* 2531 1/2-1/8 2531 1/2-1/4 2531 1/2-3/8*</p> <p>* = with through-out thread</p> <p>BSP Reducing</p>
 <p>Mod. 2543 M5 2543 1/8 2543 1/4 2543 3/8 2543 1/2</p> <p>Sleeve</p>	 <p>Mod. 2553 M5-1/8 2553 1/8-1/4 2553 1/8-3/8 2553 1/8-1/2 2553 1/4-3/8 2553 1/4-1/2 2553 3/8-1/2</p> <p>Reducing Sleeve</p>	 <p>Mod. 2611 M5 2611 1/8 2611 1/4 2611 3/8 2611 1/2 2611 1</p> <p>BSP Male Plug</p>
 <p>Mod. 2610 3/4</p> <p>BSPT Male Plug</p>	 <p>Mod. 2613 1/8 2613 1/4 2613 3/8 2613 1/2</p> <p>BSP Female Plug</p>	 <p>Mod. 2601 2-M5 2601 4,5-M5 2601 7-1/8 2601 7-1/4 2601 8-1/8 2601 9-1/8 2601 9-1/4 2601 9-3/8</p> <p>2601 12-1/4 2601 12-3/8 2601 12-1/2 2601 17-3/8 2601 17-1/2</p> <p>Metric-BSP Male Hose Adaptor</p>



Mod.
2013 1/8
2013 1/4
2013 3/8
2013 1/2

BSPT Female Elbow



Mod.
2010 1/8
2010 1/4
2010 3/8
2010 1/2
2010 3/4
2010 1

BSP Male Elbow



Mod.
2021 M5-M5*
2020 1/8-1/8
2020 1/4-1/4
2020 3/8-3/8
2020 1/2-1/2
2020 3/4-3/4
2020 1-1

BSPT Male Female Elbow
* = Metric Male Female Elbow



Mod.
2050 1/8-1/8
2050 1/4-1/4
2050 3/8-3/8
2050 1/2-1/2

M.M.F. Tee



Mod.
2060 1/8-1/8
2060 1/4-1/4
2060 3/8-3/8
2060 1/2-1/2

F.M.F. Tee



Mod.
2080 1/8
2080 1/4
2080 3/8
2080 1/2
2080 3/4
2080 1

Male Tee



Mod.
2070 1/8-1/8
2070 1/4-1/4
2070 3/8-3/8
2070 1/2-1/2

M.F.F. Tee



Mod.
2090 1/8-1/8
2090 1/4-1/4
2090 3/8-3/8
2090 1/2-1/2
2090 3/4-3/4
2090 1-1

M.F.M. Tee



Mod.
2003 1/8
2003 1/4
2003 3/8
2003 1/2

Female Tee



Mod.
2040 1/8-1/8
2040 1/4-1/4
2040 3/8-3/8
2040 1/2-1/2

Y.F.M.F.



Mod.
2043 1/8
2043 1/4
2043 3/8
2043 1/2

Female Y



Mod.
2033 1/8
2033 1/4
2033 3/8

Female Cross



Mod.
2023 M5-M5*
2023 M5-M6°
2023 1/8-1/8*
2023 1/4-1/4^
2023 3/8-3/8^

Single Thread Banjo
Assembled with:
° = Mod. 1631
° = Mod. SCU, SVU, SCO...
* = Mod. 1631, 1635, SCU, SVU, SCO...
^ = Mod. 1635, SCU, SVU, SCO...



Mod.
3033 1/8
3033 1/4
3033 3/8
3033 1/2

4 Ways Distribution Block with fixing holes
Material: anodized Aluminium



Mod.
3043 1/4-3D-1/8
3043 1/4-4D-1/8
3043 1/4-5D-1/8
3043 1/4-6D-1/8
3043 3/8-3D-1/4
3043 3/8-4D-1/4
3043 3/8-5D-1/4
3043 3/8-6D-1/4
3043 1/2-3D-3/8
3043 1/2-4D-3/8
3043 1/2-5D-3/8
3043 1/2-6D-3/8

Manifold with double lateral outlets
Material: anodized Aluminium



Mod.
3053 1/4-3L-1/8
3053 1/4-4L-1/8
3053 1/4-5L-1/8
3053 1/4-6L-1/8
3053 3/8-3L-1/4
3053 3/8-4L-1/4
3053 3/8-5L-1/4
3053 3/8-6L-1/4
3053 1/2-3L-3/8
3053 1/2-4L-3/8
3053 1/2-5L-3/8
3053 1/2-6L-3/8

Manifold with lateral outlets
Material: anodized Aluminium

Tubing, spirals and accessories

Tubes: reinforced PVC, Polyamide PA12, Hytrel Polyester, Polyethylene, PU

Diameters: 4/2, 5/3, 6/4, 8/6, 10/8, 12/10, 15/12,5 mm

Camozzi offers a range of tubes and spirals with specific features which are suitable for several technical requirements. Thanks to high-quality raw materials and with a low specific weight, these products are very small and lightweight. They also show high resistance against stress and flexural vibrations.

The high specularity of internal surfaces for the fluid passage (roughness of about 6 micron) allows to reduce the loosening of loads and to reach very high flows with same diameters. Technopolymers used are particularly resistant to aging, thus ensuring the product a very long life.

 <p>Mod. PV 6/4 PV 8/6 PV 10/8 PV 12/10 PV 15/12,5</p> <p>Tube in reinforced PVC Standard colour: Blue</p>	 <p>Mod. TRN 4/2 TRN 5/3 TRN 6/4 TRN 8/6 TRN 10/8 TRN 12/10</p> <p>Tube in polyamide PA12 Standard colour: Neutral Colours available on request: Blue - Red - Green - Black - Yellow</p>	 <p>Mod. TRH 4/2-Z TRH 5/3-Z TRH 6/4-Z TRH 8/6-Z TRH 10/8-Z TRH 12/10-Z</p> <p>Tubes in Hytrel polyester Standard colour: Blue Colours available on request: Red - Green - Black - Yellow - White</p>
 <p>Mod. TPE 5/3 TPE 6/4 TPE 8/6 TPE 10/8</p> <p>Tube in low density polyethylene Standard color: Neutral Colour available on request: Blue</p>	 <p>Mod. TPC 4/2 TPC 6/4 TPC 8/6 TPC 10/8 TPC 12/8</p> <p>Tubes in Polyurethane 98 Shore Standard colour: Grey RAL 7012</p>	 <p>Mod. TSP 6/4 TSP 8/6 TSP 10/8 TSP 12/10</p> <p>Spiral in Rilsan (PA 11) Standard colour: Blue Other colours available on request</p>
 <p>Mod. MPL-4 MPL-6 MPL-8 MPL-10 MPL-12 MPL-14</p> <p>Plastic tubes clamps Colour: Blue</p>	 <p>Mod. PNZ-12 PNZ-25</p> <p>Small and large tubes cutter Replacement blades can be ordered separately</p>	 <p>Mod. PNZP-12</p> <p>Plastic tubes cutter</p>

Series 5000 quick-release couplings


Nominal diameters: 5, 7 mm





























Couplings threads: G1/8, G1/4, G3/8, G1/2

Plastic tubes: 6/4, 8/6, 10/8; rubber hoses: 6x14, 8x17, 10x19, 13x23

Series 5000 quick-release couplings are suitable in situations where, for plant engineering or safety reasons, the connection or disconnection of tubing must be repeated several times. These operations can be performed with no need to release the pressure and therefore a considerable amount of time can be saved.

Series 5000 quick-release couplings with mini-profile DN 5 are compatible with couplings Rectus Series 21 - 90, Legris 21. Series 5000 quick-release couplings with European profile DN 7 are compatible with couplings Cejn Series 320.



 <p>Mod. 5051 1/8 5051 1/4 5081 1/4 5081 3/8 5081 1/2</p> <p>BSP Male Quick Coupling</p> 	 <p>Mod. 5052 1/8 5052 1/4 5082 1/4</p> <p>BSP Male Quick Coupling Bulkhead</p> 	 <p>Mod. 5053 1/8 5053 1/4 5083 1/4 5083 3/8 5083 1/2</p> <p>BSP Female Quick Coupling</p> 
 <p>Mod. 5054 6/4 5054 8/6 5084 8/6 5084 10/8</p> <p>Quick Coupling Push-on</p> 	 <p>Mod. 5055 6/4 5055 8/6</p> <p>Quick Coupling Bulkhead Push-on</p> 	 <p>Mod. 5056 06 5056 09 5086 09 5086 12</p> <p>Quick Coupling Hose Adapter</p> 
 <p>Mod. 5057 6x14 5087 6x14 5087 8x17 5087 10x19 5087 13x23</p> <p>Quick Coupling Hose Connector</p> 	 <p>Mod. 5058 6/4 5058 8/6 5088 8/6 5088 10/8</p> <p>Quick Coupling with Spring</p> 	 <p>Mod. 5150 1/8 5150 1/4 5180 1/4 5180 3/8 5180 1/2</p> <p>Male Connector</p> 
 <p>Mod. 5350 1/8 5350 1/4 5380 1/4 5380 3/8 5380 1/2</p> <p>Female Connector</p> 	 <p>Mod. 5450 6/4 5450 8/6 5480 8/6 5480 10/8</p> <p>Push-on Connector</p> 	 <p>Mod. 5650 06 5650 09 5680 06 5680 09 5680 12</p> <p>Connector with Barb</p> 
 <p>Mod. 5750 6x14 5780 6x14 5780 8x17 5780 13x23</p> <p>Hose Connector</p> 	 <p>Mod. 5850 6/4 5850 8/6 5880 8/6 5880 10/8</p> <p>Connector with Spring</p> 	

New


Series 5000L and 5000LT quick-release couplings for the conditioning of moulds for plastics

Nominal diameters: 5, 7 mm


Couplings threads: G1/8, G1/4, G3/8

The Series 5000L and 5000LT couplings have been designed to connect tubes for water, air or oil, used within plastic injection and die casting moulds.

The Series 5000L and 5000LT couplings provide a quick connection and disconnection method for the replacement of heating and conditioning tubes directed towards the mould, as well as tubes coming from water collectors or sources.





Couplings type "L"



Couplings type "LT"




Mod.
5053L 1/8
5053L 1/4
5053LT 1/8
5053LT 1/4



BSP female quick-coupling




Mod.
5083L 1/4
5083L 3/8
5083LT 1/4
5083LT 3/8



BSP female quick-coupling



Mod.
5150L 1/8
5150L 1/4
5180L 1/4
5180L 3/8



Male connector